

APPLICATION FOR OSHPD PREAPPROVAL

OFFICE OF STATEWIDE HEALTH PLANNING AND DEVELOPMENT **FACILITIES DEVELOPMENT DIVISION**

OFFICE USE ONLY

OF MANUFACTURER'S CERTIFICATION (OPM) APPLICATION #: OPM-0353-13									
OSHPD Preapproval of Manufacturer's Certification (OPM)									
Type: ☐ New ☐ Renewal ☐ Update to Pre-CBC 2013 OPA Number:									
Manufacturer Information									
Manufacturer: IPA, LLC.									
Manufacturer's Technical Representative: Ward Broom									
Mailing Address: 1105 Satelite Blvd. Suite 300, Suwannee, GA. 30024									
Telephone: On File Email: On File									
Product Information OS DDd									
Product Name: ScrubXchange									
Product Type: Other Mechanical Components Constructed of High-Deformability Materials									
Product Model Number: N/A BY: William Staehlin									
General Description: Dispenses Clean Scrub Suits to Authorized Users									
DATE: 01/31/2017									
Applicant Information									
Applicant Company Name: EASE Co.									
Contact Person: Jonathan Roberson, S.E.									
Mailing Address: 5877 Pine Ave. Suite 210, Chino Hills, CA. 91709									
Telephone: _(909) 606-7622 Email: _J.Roberson@EASECo.com									
I hereby agree to reimburse the Office of Statewide Health Planning and Development review fees in accordance with the California Administrative Code, 2016.									
Signature of Applicant: Date: 5/31/16									
Title: Principal Engineer Company Name: EASE Co.									

"Access to Safe, Quality Healthcare Environments that Meet California's Diverse and Dynamic Needs"







OFFICE OF STATEWIDE HEALTH PLANNING AND DEVELOPMENT **FACILITIES DEVELOPMENT DIVISION**

Registered Design Professional Preparing Engineering Recommendations										
Company Name: EASE Co.										
Name: Jonathan Roberson, S.E. California License Number: S4197										
Mailing Address: 5877 Pine Ave. Suite 210, Chino Hills, CA. 91709										
Telephone: 909-606-7622 Email: J.Roberson@EASECo.com										
OSHPD Special Seismic Certification Preapproval (OSP)										
 □ Special Seismic Certification is preapproved under OSP- (Separate application for OSP is required) □ Special Seismic Certification is not preapproved 										
Certification Method(s)										
☐ Testing in accordance with: ☐ ICC-ES AC156 ☐ FM 1950-16 ☐ Other* (Please Specify):										
*Use of criteria other than those adopted by the California Building Standards Code, 2016 (CBSC 2016) for component supports and attachments are not permitted. For distribution system, interior partition wall, and suspended ceiling seismic bracings, test criteria other than those adopted in the CBSC 2016 may be used when approved by OSHPD prior to testing. Analysis DATE: 01/31/2017 Experience Data Combination of Testing, Analysis, and/or Experience Data (Please Specify):										
List of Attachments Supporting the Manufacturer's Certification										
 ☐ Test Report ☐ Drawings ☐ Calculations ☐ Manufacturer's Catalog ☐ Other(s) (Please Specify): 										
OFFICE USE ONLY – OSHPD APPROVAL VALID FOR CBC 2016 & ALL PRE-2016 CODE BASED PROJECTS										
Signature:										
Condition of Approval (if applicable):										

"Access to Safe, Quality Healthcare Environments that Meet California's Diverse and Dynamic Needs"





Page 2 of 2



5877 Pine Ave, Ste. 210 Chino Hills, CA. 91709 Phn: (909) 606-7622

Office of Statewide Health Planning and Development

PREAPPROVAL OF MANUFACTURER'S CERTIFICATION OPM-0353-13

THIS PREAPPROVAL CONFORMS TO THE 2016 CALIFORNIA BUILDING CODE

MANUFACTURER:

EQUIPMENT NAME:

IPA, LLC

scrubXchange LX & MX

Sheet: 1 of 12 Date: 8/18/16

GENERAL NOTES

- 1. THIS OSHPD PREAPPROVAL OF MANUFACTURER'S CERTIFICATION (OPM) IS BASED ON THE 2016 CBC. THE DEMANDS (DESIGN FORCES) FOR USE WITH THIS OPM SHALL BE BASED ON THE 2016 CBC
- 2. THIS DOCUMENT MAY ONLY BE USED WITH THE EXPRESS WRITTEN CONSENT OF THE MANUFACTURER LISTED ABOVE FOR THE SPECIFIC PROJECT SITE AND INSTALLATION LOCATION. THIS DOCUMENT IS INVALID WITHOUT SUCH CONSENT.
- 3. THIS PREAPPROVAL CONFORMS TO THE 2016 CALIFORNIA BUILDING CODE WHERE SDS IS NOT GREATER THAN 1.95 & 2.20. SEE DETAIL FOR APPLICABILITY OPM-0353-13
- 4. FORCES PER ASCE 7-10 SECTION 13.3.1, EQUATIONS 13.3-1, 13.3-2 & 13.3-3,

WHERE SDS = 1.95, a_P = 1.0, I_P = 1.5, R_P = 2.5, z/h = 0 AT CONCRETE SLAB. SEE FOLLOWING SHEETS FOR Ω_0 WHERE SDS = 2.20, a_P = 1.0, I_P = 1.5, R_P = 2.5, z/h = 0 AT CONCRETE SLAB & $z/h \le 1$ AT CONCRETE SLAB ON METAL DECK.

- SEE FOLLOWING SHEETS FOR $\Omega_{\scriptscriptstyle 0}$
- 5. THIS PREAPPROVAL COVERS ONLY THE SUPPORTS AND ATTACHMENTS OF THE EQUIPMENT TO THE STRUCTURE.
- 6. ALL DESIGN FORCES SHOWN ON THE DRAWINGS ARE FACTORED LOADS THAT SHALL BE USED FOR STRENGTH DESIGN.
- 7. CONCRETE SLAB ON METAL DECK DETAIL VALID FOR DEMANDS SHOWN AT ANY ELEVATION IN THE BUILDING. (i.e. z/h < 1).
- 8. CONCRETE SLAB ON GRADE DETAIL VALID FOR DEMANDS SHOWN AT ANY ELEVATION AT OR BELOW GRADE. (i.e. z/h = 0)

9. RESPONSIBILITIES OF THE STRUCTURAL ENGINEER OF RECORD OF THE BUILDING

- A. PROVIDE SUPPORTING STRUCTURE TO SUPPORT WEIGHTS AND FORCES SHOWN IN ADDITION TO ALL OTHER LOADS.
- B. VERIFY THAT THE INSTALLATION IS IN CONFORMANCE WITH THE 2016 CBC AND WITH THE DETAILS, MATERIAL AND GAGE OF THE UNIT WHERE ATTACHMENTS ARE MADE AGREE WITH THE INFORMATION SHOWN ON THE PREAPPROVAL DOCUMENTS.
- C. VERIFY THAT PROJECT SPECIFIC VALUES OF SDS & z/h RESULT IN SEISMIC FORCES (Eh, Ev) THAT DO NOT EXCEED THE VALUES ON THE DETAILS.
- D. VERIFY THAT THE CONCRETE SLAB TO WHICH THE EQUIPMENT IS ANCHORED MEETS THE REQUIREMENTS OF THE APPLICABLE ICC ESR AND THIS OPM.
- E. VERIFY THAT THE ANCHORS ARE AN ADEQUATE DISTANCE FROM ANY SLAB EDGES OR OPENINGS (SEE TYPICAL DETAIL ON SHEET 2).
- F. VERIFY THAT ALL NEW OR EXISTING ANCHORS ARE AN ADEQUATE DISTANCE FROM THE UNIT ATTACHMENTS AND CHECK FOR INTERACTION WHERE OTHER ANCHORS ARE WITHIN 18" OR 6hef FROM THIS UNIT'S ANCHORS.



www.EquipmentAnchorage.com

IPA, LLC

DES. J. ROBERSON

11-1618

2

SHEET

scrubXchange LX & MX

DATE 8/18/16

JOB NO.


of 12 SHEET

10. EXPANSION ANCHORS:


A. ATTACHMENT IS TO BE MADE WITH THE ANCHORS LISTED BELOW AND INSTALLED AS DESCRIBED IN THE CORRESPONDING ICC REPORT.

Anchor Diameter	Concrete Type	Min. f'c (psi)	Anchor Type	ICC Report No.	Min. Embed.	Min. Spacing	Min. Edge Dist.	Min. Conc. Thickness	Torque Test	Direct Tension Test
3/8"	Sand Light Weight	3000	Hilti Kwik Bolt TZ	ESR-1917	2"	N/A	N/A	See Detail "B"	25 FT-LB	1825 lb
5/8"	Normal Weight	3000	Hilti Kwik Bolt TZ	ESR-1917	3.125"	7"	24"	5"	60 FT-LB	2738 lb
5/8"	Normal Weight	3000	Hilti Kwik Bolt TZ	ESR-1917	4"	7"	24"	6"	60 FT-LB	3594 lb

- B. THIS PREAPPROVAL ALLOWS FOR UP TO A MAXIMUM OF 2 ADJACENT CONCRETE SLAB EDGES, 24" AWAY MINIMUM (i.e. CORNER). SEE ADJACENT DETAIL FOR ADDITIONAL MINIMUM ALLOWABLE CONCRETE EDGE DISTANCES.
- C. TESTING OF EXPANSION ANCHORS PER 2016 CBC, 1910A.5:
 TESTING SHALL BE DONE IN THE PRESENCE OF THE SPECIAL
 INSPECTOR AND A REPORT OF THE TEST RESULTS SHALL BE
 SUBMITTED TO OSHPD
 - (i) AFTER AT LEAST 24 HOURS HAVE ELAPSED SINCE INSTALLATION, h in DIRECT PULL TENSION TEST OR TORQUE TEST AT LEAST 50% OF THE ANCHORS.
 - (ii) ACCEPTANCE CRITERIA:
 - DIRECT TENSION TEST: THE ANCHOR SHOULD HAVE NO
 OBSERVABLE MOVEMENT AT THE TEST LOAD. A PRACTICAL WAY
 TO DETERMINE OBSERVABLE MOVEMENT IS THAT THE WASHER
 BECOMES LOOSE.
 - TORQUE TEST: THE APPLICABLE TORQUE MUST BE ACHIEVED WITHIN THE FOLLOWING LIMITS: WEDGE TYPE: 1/2 TURN OF THE NUT
 - (iii) IF ANY ANCHOR FAILS, TEST ALL ANCHORS.
- D. AVOID DAMAGING EXISTING STEEL REINFORCING IN CONCRETE SLAB WHEN INSTALLING CONCRETE EXPANSION ANCHORS.
- E. PROVIDE FOR FULL THREAD ENGAGEMENT OF NUT & WASHER.
- 11. BOLTS THROUGH CONCRETE ON METAL DECK
 - A. BOLTS SHALL BE TORQUED BY 3/4 TURN OF THE NUTS AFTER THE SNUG TIGHT (THE SNUG-TIGHT CONDITION IS DEFINED AS THE TIGHTNESS REQUIRED TO BRING THE CONNECTED PLIES INTO FIRM CONTACT) CONDITION IS ACHIEVED, UNLESS OTHERWISE NOTED.
 - B. THROUGH BOLT HOLES SHALL BE 1/16" LARGER THAN BOLT SIZE (HOLE SIZE = BOLT SIZE + 1/16) FOR CONCRETE.
 - C. THROUGH-BOLTS IN CONCRETE SHALL RECEIVE SPECIAL INSPECTION AND TESTING (THROUGH BOLTS WITH STEEL TO STEEL CONNECTION IN TENSION DO NOT REQUIRE TENSION TESTING) IN ACCORDANCE WITH REQUIREMENTS FOR POST-INSTALLED ANCHORS.



TYPICAL CONCRETE EDGE DETAIL



www.EquipmentAnchorage.com

IPA, LLC

DE8. J. ROBERSON

11-1618


SHEET 3

scrubXchange LX & MX

DATE 8/18/16

JOB NO.

о_г 12 _{энеетэ}

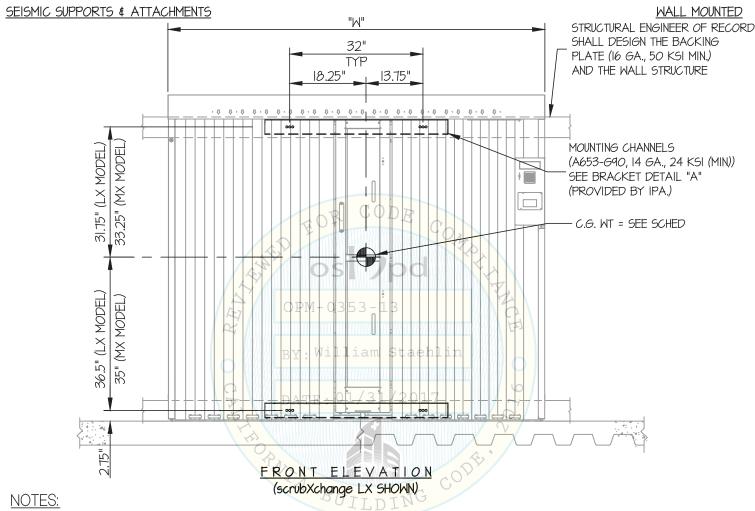

1. FORCES ARE DETERMINED PER 2016 CALIFORNIA BUILDING CODE AND ASCE 7-10.

STRENGTH DESIGN IS USED. (SDs = 2.20, Δp = 1.0, |p = 1.5, Rp = 2.5, Ω_0 = 2.5, $z/h \le 1$)

HORIZONTAL FORCE (E_h) = 0.99 Wp HORIZONTAL FORCE (E_{mh}) = 2.48 Wp (FOR CONCRETE ANCHORAGE) VERTICAL FORCE (E_v) = 0.44 Wp

- 2. CENTER OF GRAVITY (C.G.) AND WEIGHT ARE THE GOVERNING PARAMETERS FOR DESIGN. THIS PREAPPROVAL ENCOMPASSES ALL WEIGHTS UP TO THE MAXIMUM WEIGHT SHOWN.
- 3. STRUCTURAL ENGINEER OF RECORD FOR THE BUILDING SHALL PROVIDE SUPPORT STRUCTURE DESIGNED TO SUPPORT WEIGHTS AND FORCES SHOWN IN COMBINATION WITH ALL OTHER LOADS THAT MAY BE PRESENT



DES. J. ROBERSON

www.EquipmentAnchorage.com

IPA, LLC

JOB NO. 11-1618

4


WALL MOUNTED

SHEETS

SHEET

scrubXchange LX & MX

DATE 8/18/16 OF 12

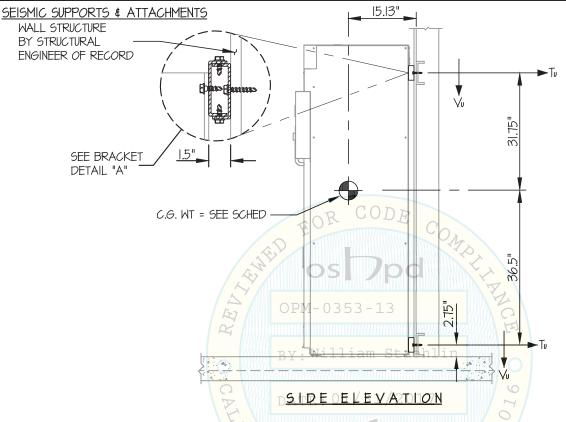

UNIT	UNIT WEIGHT (lb.)	* LOADED WEIGHT (lb.)	"W" (in.)	** Tu (lb.)	** Vu (lb.)
scrubXchange MX W/ "240" SLOT CART	350	670	57.75	81	65
scrubXchange LX W/ "480" SLOT CART	II450IN	955	90.25	120	93

^{*} INCLUDES CONTENTS & UNIT WEIGHT



^{**} VALUES INCLUDE $\Omega_{\rm o}$

www.EquipmentAnchorage.com

IPA, LLC

DES. J. ROBERSON


11-1618

SHEET

scrubXchange LX & MX

8/18/16 DATE

JOB NO.

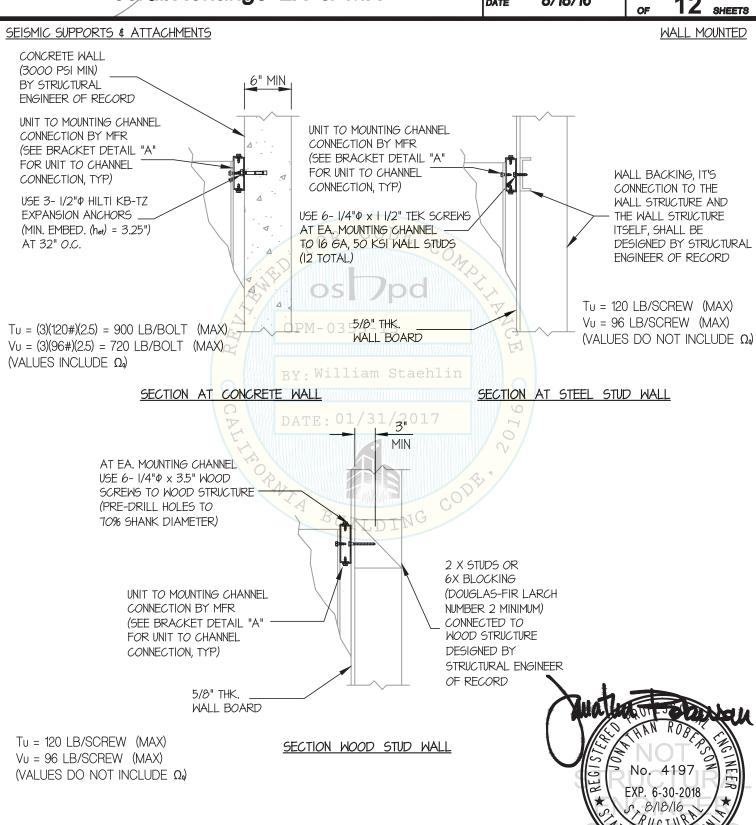

EASE

EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING

www.EquipmentAnchorage.com

IPA, LLC

DES. J. ROBERSON

11-1618


SHEET 6


scrubXchange LX & MX

DATE 8/18/16

JOB NO.

OF 12 SHEETS

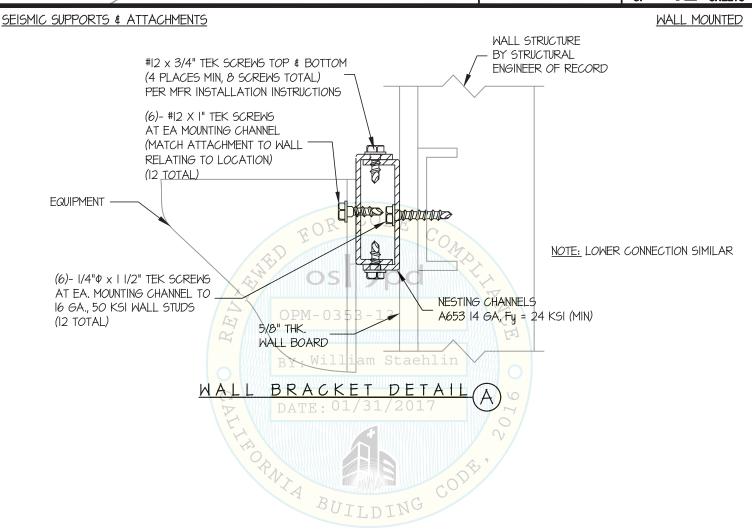



www.EquipmentAnchorage.com

IPA, LLC

scrubXchange LX & MX

DES. J. ROBERSON

11-1618 JOB NO.


8/18/16 DATE

SHEET

SHEETS

SEISMIC SUPPORTS & ATTACHMENTS

CONCRETE SLAB

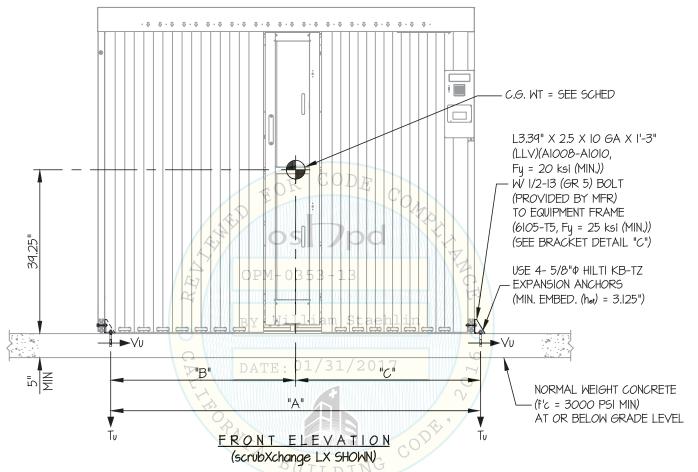

NOTES:

FORCES ARE DETERMINED PER 2016 CALIFORNIA BUILDING CODE AND ASCE 7-10.

STRENGTH DESIGN IS USED. (SDS = 1.95, Δp = 1.0, |p| = 1.5, Rp = 2.5, Ω_0 = 2.5, z/h < 1)

HORIZONTAL FORCE (Eh) = 0.878 Wp


HORIZONTAL FORCE (Emh) = 2.20 Wp (FOR CONCRETE ANCHORAGE)

VERTICAL FORCE (Ev) = 0.39 Wp

2. CENTER OF GRAVITY (C.G.) AND WEIGHT ARE THE GOVERNING PARAMETERS FOR DESIGN, THIS PREAPPROVAL ENCOMPASSES ALL WEIGHTS UP TO THE MAXIMUM WEIGHT SHOWN.

3. STRUCTURAL ENGINEER OF RECORD FOR THE BUILDING SHALL PROVIDE. SUPPORT STRUCTURE DESIGNED TO SUPPORT WEIGHTS AND FORCES SHOWN IN COMBINATION WITH ALL OTHER LOADS THAT MAY BE PRESENT

4. SEE GENERAL NOTES: SHEETS 1 AND 2.



www.EquipmentAnchorage.com

IPA, LLC

DES. J. ROBERSON

8/18/16

JOB NO. 11-1618

DATE

SHEET

OF 12 SHEETS

CONCRETE SLAB

scrubXchange LX & MX

SEISMIC SUPPORTS & ATTACHMENTS C.G. WT = SEE SCHED L3.39" X 2.5 X IO GA X I'-3" (LLV)(A1008-A1010, Fy = 20 ksi (MIN.)) W 1/2-13 (GR 5) BOLT (PROVIDED BY MFR) TO EQUIPMENT FRAME (6105-T5, Fy = 25 ksi (MIN.)) (SEE BRACKET DETAIL "C") USE 4- 5/8" HILTI KB-TZ 14.65" EXPANSION ANCHORS (MIN. EMBED. $(h_{ef}) = 3.125"$) **→**\/U** NORMAL WEIGHT CONCRETE (f'c = 3000 PSI MIN) AT OR BELOW GRADE LEVEL DSIDE ELEVATION

UNIT	UNIT WEIGHT (lb.)	* LOADED WEIGHT (lb.)	"A" (in.)	"B" (in.)	"C" (in.)	** Tu (lb.)	** Vu (lb.)
scrubXchange MX W/ "240" SLOT CART	350	670	56.13	26.88	29.25	1673	567
scrubXchange LX W/ "480" SLOT CART	B (450 L.D	IN 955	88.50	44.25	44.25	2383	808

^{*} INCLUDES CONTENTS & UNIT WEIGHT



^{**} VALUES INCLUDE $\Omega_{\rm o}$

www.EquipmentAnchorage.com

IPA, LLC

DES. J. ROBERSON 11-1618 JOB NO.

SHEET


scrubXchange LX & MX

8/18/16 DATE

SHEETS

SEISMIC SUPPORTS & ATTACHMENTS

CONCRETE SLAB ON METAL DECK

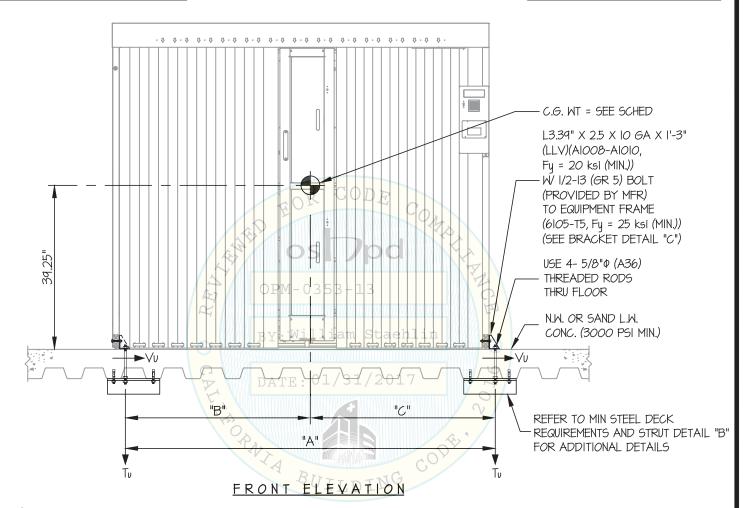


NOTES:

1. FORCES ARE DETERMINED PER 2016 CALIFORNIA BUILDING CODE AND ASCE 7-10.

STRENGTH DESIGN IS USED. (SDS = 2.20, Δp = 1.0, |p| = 1.5, Rp = 2.5, Ω_0 = 2.5, z/h < 1)

HORIZONTAL FORCE (En) = 1.58 Wp HORIZONTAL FORCE (Emh) = 3.96 Wp (FOR CONCRETE ANCHORAGE) VERTICAL FORCE (Ev) = 0.44 Wp

- 2. CENTER OF GRAVITY (C.G.) AND WEIGHT ARE THE GOVERNING PARAMETERS FOR DESIGN, THIS PREAPPROVAL ENCOMPASSES ALL WEIGHTS UP TO THE MAXIMUM WEIGHT SHOWN.
- 3. STRUCTURAL ENGINEER OF RECORD FOR THE BUILDING SHALL PROVIDE SUPPORT STRUCTURE DESIGNED TO SUPPORT WEIGHTS AND FORCES SHOWN IN COMBINATION WITH ALL OTHER LOADS THAT MAY BE PRESENT.



www.EquipmentAnchorage.com

IPA, LLC


DES. J. ROBERSON

11-1618 JOB NO.

SHEET

8/18/16 DATE

SHEETS

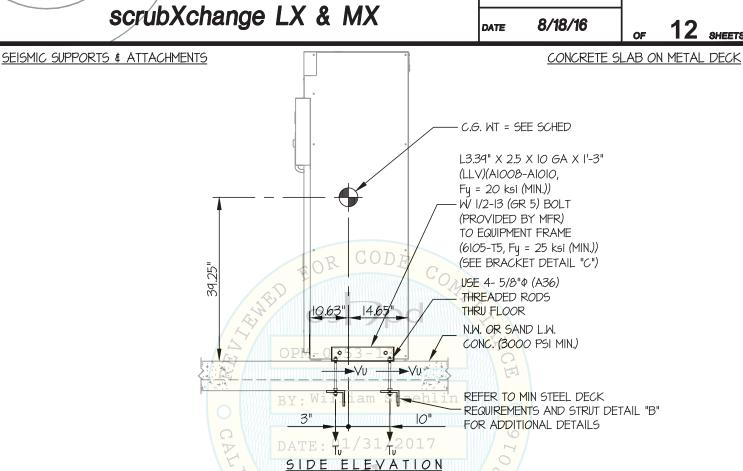

UNIT	UNIT WEIGHT (lb.)	* LOADED WEIGHT (Ib.)	"A" (in.)	"B" (in.)	"C" (in.)	** Tu (lb.)	** Vu (lb.)
scrubXchange MX W/ "240" SLOT CART	BU350	670	56.13	26.88	29.25	1177	407
scrubXchange LX W/ "480" SLOT CART	450	955	88.50	44.25	44.25	1680	580

^{*} INCLUDES CONTENTS & UNIT WEIGHT



^{**} VALUES DO NOT INCLUDE $\Omega_{\rm o}$

EASE

EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING

www.EquipmentAnchorage.com

IPA, LLC

DES. J. ROBERSON

11-1618

8/18/16

SHEET 1

OF 12 SHEETS

scrubXchange LX & MX


SEISMIC SUPPORTS & ATTACHMENTS

THREADED ROD OCCURS AT FLUTE)

CONCRETE DETAILS

DATE

JOB NO.

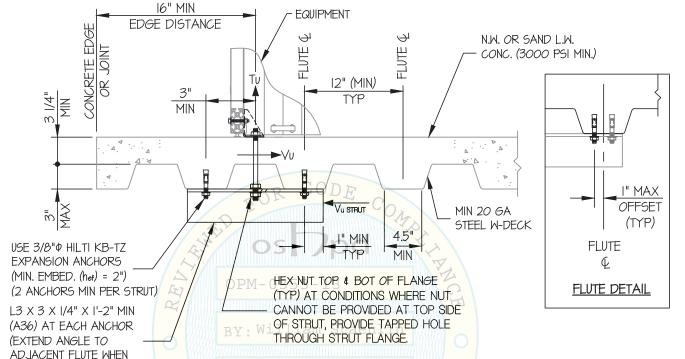

MIN STEEL DECK REQUIREMENTS AND STRUT DETAIL





www.EquipmentAnchorage.com

IPA, LLC

scrubXchange LX & MX


DES. J. ROBERSON

11-1618 JOB NO.

SHEET

8/18/16 DATE

SHEETS

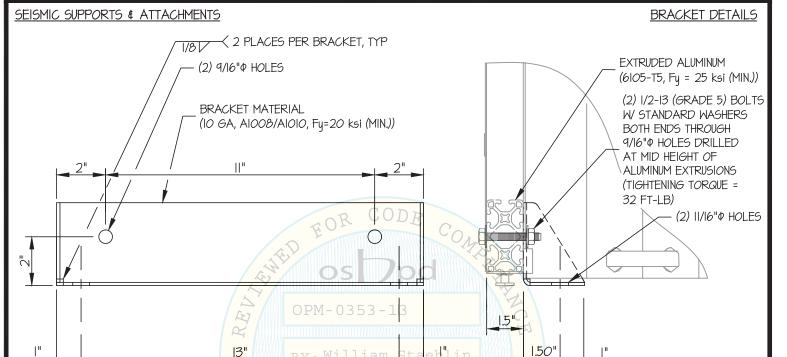

FRONT

15"

SIDE

1.50"

FLOOR BRACKET DETAIL

