

APPLICATION FOR OSHPD PREAPPROVAL

OFFICE OF STATEWIDE HEALTH PLANNING AND DEVELOPMENT **FACILITIES DEVELOPMENT DIVISION**

OFFICE USE ONLY

OF MANUFACTURER'S CERTIFICATION (OPM) APPLICATION #: OPM-0364-13										
OSHPD Preapproval of Manufacturer's Certification (OPM)										
Type: ☐ New ☐ Renewal ☐ Update to Pre-CBC 2013 OPA Number:										
Manufacturer Information										
Manufacturer: STEELCASE CORPORATION										
Manufacturer's Technical Representative: Michael Abson										
Mailing Address: 901 44th Street, Grand Rapids, Ml. 49508										
Telephone: On File Email: On File										
Product Information OS DDd										
Product Name: Answer Work Station B										
Product Type: Interior Partitions OPM-0364-13										
Product Model Number: N/A By: William Staehlin										
General Description: Partitioned work station with work surface and cabinet										
DATE: 08/28/2017										
Applicant Information										
Applicant Company Name: EASE Co.										
Contact Person: Jonathan Roberson, S.E.										
Mailing Address: 5877 Pine Ave. Suite 210, Chino Hills, CA. 91709										
Telephone: (909) 606-7622 Email: J.Roberson@EASECo.com										
I hereby agree to reimburse the Office of Statewide Health Planning and Development review fees in accordance with the California Administrative Code, 2016.										
Signature of Applicant: Date: 6/30/16										
Title: Principal Engineer Company Name: EASE Co.										

"Access to Safe, Quality Healthcare Environments that Meet California's Diverse and Dynamic Needs"







OFFICE OF STATEWIDE HEALTH PLANNING AND DEVELOPMENT **FACILITIES DEVELOPMENT DIVISION**

Registered Design Professional Preparing Engineering Recommendations									
Company Name: EASE Co.									
Name: Jonathan Roberson, S.E. California License Number: S4197									
Mailing Address: 5877 Pine Ave. Suite 210, Chino Hills, CA. 91709									
Telephone: 909-606-7622 Email: <u>J.Roberson@EASECo.com</u>									
OSHPD Special Seismic Certification Preapproval (OSP)									
 □ Special Seismic Certification is preapproved under OSP-(Separate application for OSP is required) □ Special Seismic Certification is not preapproved 									
Certification Method(s)									
☐ Testing in accordance with: ☐ ICC-ES AC156 ☐ FM 1950-16 ☐ Other* (Please Specify):									
OPM-0364-13									
*Use of criteria other than those adopted by the California Building Standards Code, 2016 (CBSC 2016) for component supports and attachments are not permitted. For distribution system, interior partition wall, and suspended ceiling seismic bracings, test criteria other than those adopted in the CBSC 2016 may be used when approved by OSHPD prior to testing. Analysis DATE: 08/28/2017									
☐ Experience Data									
Combination of Testing, Analysis, and/or Experience Data (Please Specify):									
P. V. S.									
List of Attachments Supporting the Manufacturer's Certification									
 ☐ Test Report ☐ Drawings ☐ Calculations ☐ Manufacturer's Catalog ☐ Other(s) (Please Specify): 									
OFFICE USE ONLY – OSHPD APPROVAL VALID FOR CBC 2016 & ALL PRE-2016 CODE BASED PROJECTS									
Signature: Date: 08-28-2017									
Print Name:William Staehlin									
Title: SSE									
Condition of Approval (if applicable):									

"Access to Safe, Quality Healthcare Environments that Meet California's Diverse and Dynamic Needs"





Page 2 of 12



5877 Pine Ave, Ste. 210 Chino Hills, CA. 91709 Phn: (909) 606-7622

Office of Statewide Health Planning and Development

PREAPPROVAL OF MANUFACTURER'S CERTIFICATION OPM-0364-13

THIS PREAPPROVAL CONFORMS TO THE 2016 CALIFORNIA BUILDING CODE

MANUFACTURER: \$1

STEELCASE INC.

ANSWER WORK STATION "B"

Sheet: 1 of 10

Date: 8/18/17

GENERAL NOTES

EQUIPMENT NAME:

- 1. THIS OSHPD PREAPPROVAL OF MANUFACTURER'S CERTIFICATION (OPM) IS BASED ON THE 2016 CBC. THE DEMANDS (DESIGN FORCES) FOR USE WITH THIS OPM SHALL BE BASED ON THE 2016 CBC
- 2. THIS DOCUMENT MAY ONLY BE USED WITH THE EXPRESS WRITTEN CONSENT OF THE MANUFACTURER LISTED ABOVE FOR THE SPECIFIC PROJECT SITE AND INSTALLATION LOCATION. THIS DOCUMENT IS INVALID WITHOUT SUCH CONSENT.
- 3. THIS PREAPPROVAL CONFORMS TO THE 2016 CALIFORNIA BUILDING CODE WHERE SDS IS NOT GREATER THAN 1.25 & 1.90. SEE DETAIL FOR APPLICABILITY OPM-0364-13
- 4. FORCES PER ASCE 7-10 SECTION 13.3.1, EQUATIONS 13.3-1, 13.3-2 & 13.3-3,

WHERE SDS = 1.25, a_p = 1.0, I_p = 1.5, R_p = 2.5, z/h = 0 AT CONCRETE SLAB. SEE FOLLOWING SHEETS FOR Ω_0 WHERE SDS = 1.90, a_p = 1.0, I_p = 1.5, R_p = 2.5, z/h ≤ 1 AT CONCRETE SLAB ON METAL DECK. SEE FOLLOWING SHEETS FOR Ω_0

- 5. THIS PREAPPROVAL COVERS ONLY THE SUPPORTS AND ATTACHMENTS OF THE EQUIPMENT TO THE STRUCTURE.
- ALL DESIGN FORCES SHOWN ON THE DRAWINGS ARE FACTORED LOADS THAT SHALL BE USED FOR STRENGTH DESIGN.
- 7. CONCRETE SLAB ON METAL DECK DETAIL VALID FOR DEMANDS SHOWN AT ANY ELEVATION IN THE BUILDING. (i.e. z/h < 1)
- 8. CONCRETE SLAB DETAIL VALID FOR DEMANDS SHOWN AT OR BELOW GRADE. (i.e. z/h = 0)

9. RESPONSIBILITIES OF THE STRUCTURAL ENGINEER OF RECORD OF THE BUILDING

- A. PROVIDE SUPPORTING STRUCTURE TO SUPPORT WEIGHTS AND FORCES SHOWN IN ADDITION TO ALL OTHER LOADS.
- B. VERIFY THAT THE INSTALLATION IS IN CONFORMANCE WITH THE 2016 CBC AND WITH THE DETAILS, MATERIAL AND GAGE OF THE UNIT WHERE ATTACHMENTS ARE MADE AGREE WITH THE INFORMATION SHOWN ON THE PREAPPROVAL DOCUMENTS.
- C. VERIFY THAT PROJECT SPECIFIC VALUES OF SDS & z/h RESULT IN SEISMIC FORCES (Eh, Ev) THAT DO NOT EXCEED THE VALUES ON THE DETAILS.
- D. VERIFY THAT THE CONCRETE SLAB TO WHICH THE EQUIPMENT IS ANCHORED MEETS THE REQUIREMENTS OF THE SPECIFIED ICC ESR.
- E. VERIFY THAT THE ANCHORS ARE AN ADEQUATE DISTANCE FROM ANY SLAB EDGES OR OPENINGS (SEE TYPICAL DETAIL ON SHEET 2).
- F. VERIFY THAT ALL NEW OR EXISTING ANCHORS ARE AN ADEQUATE DISTANCE FROM THE UNIT ATTACHMENTS AND CHECK FOR INTERACTION WHERE OTHER ANCHORS ARE WITHIN 18" OR 6hef FROM THIS UNIT'S ANCHORS.



www.EquipmentAnchorage.com

STEELCASE INC.

DES. J. ROBERSON

15-1602

2

SHEET

DATE 8/18/17

JOB NO.

10 SHEETS


ANSWÉR WORK STATION "B"

10. EXPANSION ANCHORS:


A. ATTACHMENT IS TO BE MADE WITH THE ANCHORS LISTED BELOW AND INSTALLED AS DESCRIBED IN THE CORRESPONDING ICC REPORT.

Anchor Diameter	Concrete Type	Min. f'c (psi)	Anchor Type	ICC Report No.	Min. Embed.	Min. Spacing	Min. Edge Dist.	Min. Conc. Thickness	Torque Test	Direct Tension Test
3/8"	Sand Light Weight	3000	Hilti Kwik Bolt TZ	ESR-1917	2"	6.75"	12"	See Detail "A"	25 FT-LB	N/A
3/8"	Normal Weight	3000	Hilti Kwik Bolt TZ	ESR-1917	2"	5"	12"	4"	25 FT-LB	1471 lb

- B. THIS PREAPPROVAL ALLOWS FOR UP TO A MAXIMUM OF 2 ADJACENT CONCRETE SLAB EDGES, 12" AWAY MINIMUM (i.e. CORNER). SEE ADJACENT DETAIL FOR ADDITIONAL MINIMUM ALLOWABLE CONCRETE EDGE DISTANCES.
- C. TESTING OF EXPANSION ANCHORS PER 2016 CBC, 1910A.5:
 TESTING SHALL BE DONE IN THE PRESENCE OF THE SPECIAL
 INSPECTOR AND A REPORT OF THE TEST RESULTS SHALL BE
 SUBMITTED TO OSHPD
 - (i) AFTER AT LEAST 24 HOURS HAVE ELAPSED SINCE INSTALLATION,
 DIRECT PULL TENSION TEST OR TORQUE TEST AT LEAST 50% OF hlin
 THE ANCHORS.
 - (ii) ACCEPTANCE CRITERIA:
 - DIRECT TENSION TEST: THE ANCHOR SHOULD HAVE NO
 OBSERVABLE MOVEMENT AT THE TEST LOAD. A PRACTICAL WAY
 TO DETERMINE OBSERVABLE MOVEMENT IS THAT THE WASHER
 BECOMES LOOSE.
 - TORQUE TEST: THE APPLICABLE TORQUE MUST BE ACHIEVED WITHIN THE FOLLOWING LIMITS: WEDGE TYPE: 1/2 TURN OF THE NUT
 - (iii) IF ANY ANCHOR FAILS, TEST ALL ANCHORS.
- D. AVOID DAMAGING EXISTING STEEL REINFORCING IN CONCRETE SLAB WHEN INSTALLING CONCRETE EXPANSION ANCHORS.
- E. PROVIDE FOR FULL THREAD ENGAGEMENT OF NUT & WASHER.
- 11. BOLTS THROUGH CONCRETE ON METAL DECK
 - A. BOLTS SHALL BE TORQUED BY 3/4 TURN OF THE NUTS AFTER THE SNUG TIGHT (THE SNUG-TIGHT CONDITION IS DEFINED AS THE TIGHTNESS REQUIRED TO BRING THE CONNECTED PLIES INTO FIRM CONTACT) CONDITION IS ACHIEVED. UNLESS OTHERWISE NOTED.
 - B. THROUGH BOLT HOLES SHALL BE 1/16" LARGER THAN BOLT SIZE (HOLE SIZE = BOLT SIZE + 1/16) FOR CONCRETE.
 - C. THROUGH-BOLTS IN CONCRETE SHALL RECEIVE SPECIAL INSPECTION AND TESTING (THROUGH BOLTS WITH STEEL TO STEEL CONNECTION IN TENSION DO NOT REQUIRE TENSION TESTING) IN ACCORDANCE WITH REQUIREMENTS FOR POST-INSTALLED ANCHORS.

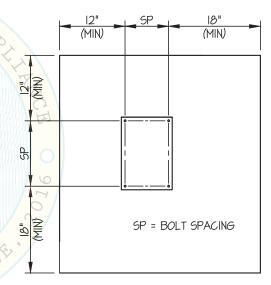

TYPICAL CONCRETE EDGE DETAIL



www.EquipmentAnchorage.com

STEELCASE INC.

DES. J. ROBERSON 15-1602

SHEET

ANSWÉR WORK STATION "B"


8/18/17 DATE

JOB NO.

SHEETS

SEISMIC SUPPORTS & ATTACHMENTS

CONCRETE SLAB

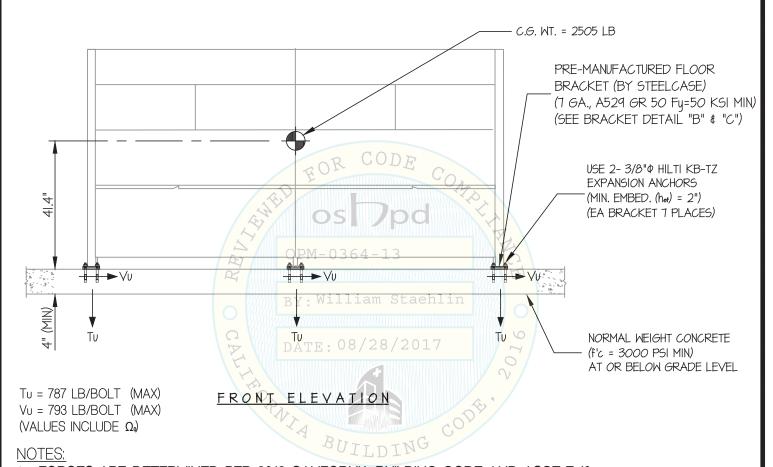

1. FORCES ARE DETERMINED PER 2016 CALIFORNIA BUILDING CODE AND ASCE 7-10

STRENGTH DESIGN IS USED. (SDS = 1.25, $\Delta p = 1.0$, |p| = 1.5, Rp = 2.5, $\Omega_0 = 2.0$, z/h = 0)

HORIZONTAL FORCE (En) = 0.56 Wp HORIZONTAL FORCE (Emh) = 1.13 Wp (FOR CONCRETE ANCHORAGE) VERTICAL FORCE (Ev) = 0.25 Wp

- 2. CENTER OF GRAVITY (C.G.) AND WEIGHT ARE THE GOVERNING PARAMETERS FOR DESIGN. THIS PREAPPROVAL ENCOMPASSES ALL WEIGHTS UP TO THE MAXIMUM WEIGHT SHOWN.
- 3. STRUCTURAL ENGINEER OF RECORD FOR THE BUILDING SHALL PROVIDE SUPPORT STRUCTURE DESIGNED TO SUPPORT WEIGHTS AND FORCES SHOWN IN COMBINATION WITH ALL OTHER LOADS THAT MAY BE PRESENT.
- 4. LIVE LOAD USED, 33 LB /FT AT COUNTERTOPS AND CABINET.
- 5. SEE GENERAL NOTES: SHEET 1 AND 2.



www.EquipmentAnchorage.com

STEELCASE INC.

DES. J. ROBERSON

15-1602

1 4

4


SHEET

ANSWÉR WORK STATION "B"

DATE 8/18/17

JOB NO.

_F 10 _{SHEETS}

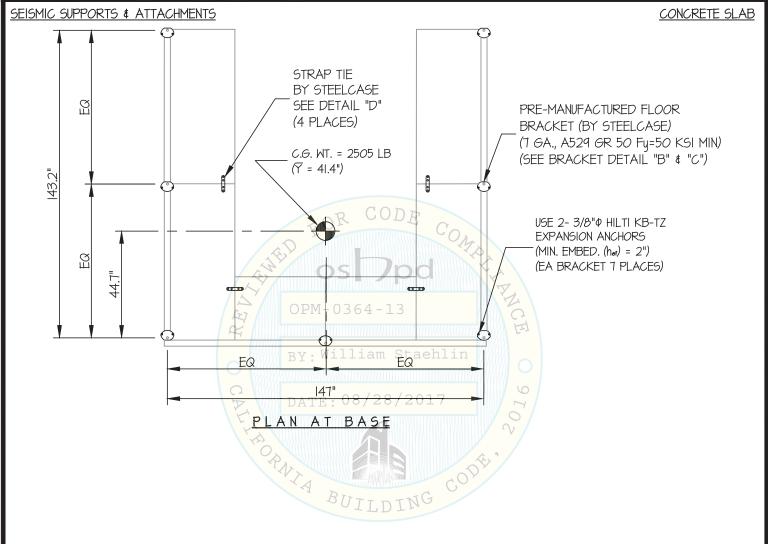



www.EquipmentAnchorage.com

STEELCASE INC.

ANSWÉR WORK STATION "B"

DES. J. ROBERSON

15-1602 JOB NO.

DATE


8/18/17

SHEETS

SHEET

SEISMIC SUPPORTS & ATTACHMENTS

CONCRETE SLAB ON METAL DECK

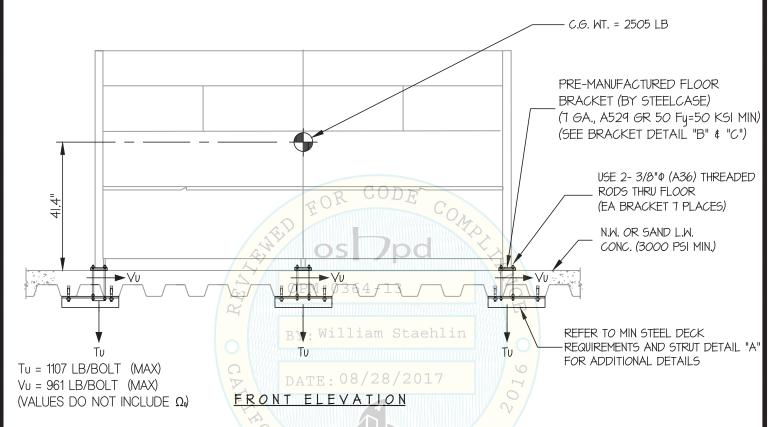

NOTES:

1. FORCES ARE DETERMINED PER 2016 CALIFORNIA BUILDING CODE AND ASCE 7-10.


STRENGTH DESIGN IS USED. (SDS = 1.90, 20 = 1.0, 10 = 1.5, 20 = 2.5, 20 = 2.0, 20 < 1)

HORIZONTAL FORCE (En) = 1.37 Wp

HORIZONTAL FORCE (Emh) = 2.74 Wp (FOR CONCRETE ANCHORAGE)

VERTICAL FORCE (Ev) = 0.38 Wp

- 2. CENTER OF GRAVITY (C.G.) AND WEIGHT ARE THE GOVERNING PARAMETERS FOR DESIGN. THIS PREAPPROVAL ENCOMPASSES ALL WEIGHTS UP TO THE MAXIMUM WEIGHT SHOWN.
- 3. STRUCTURAL ENGINEER OF RECORD FOR THE BUILDING SHALL PROVIDE SUPPORT STRUCTURE DESIGNED TO SUPPORT WEIGHTS AND FORCES SHOWN IN COMBINATION WITH ALL OTHER LOADS THAT MAY BE PRESENT.
- 4. LIVE LOAD USED, 33 LB /FT AT COUNTERTOPS AND CABINET.
- 5. SEE GENERAL NOTES: SHEET 1 AND 2.



www.EquipmentAnchorage.com

STEELCASE INC.

DES. J. ROBERSON

15-1602


SHEET


ANSWÉR WORK STATION "B"

8/18/17 DATE

JOB NO.

SHEETS

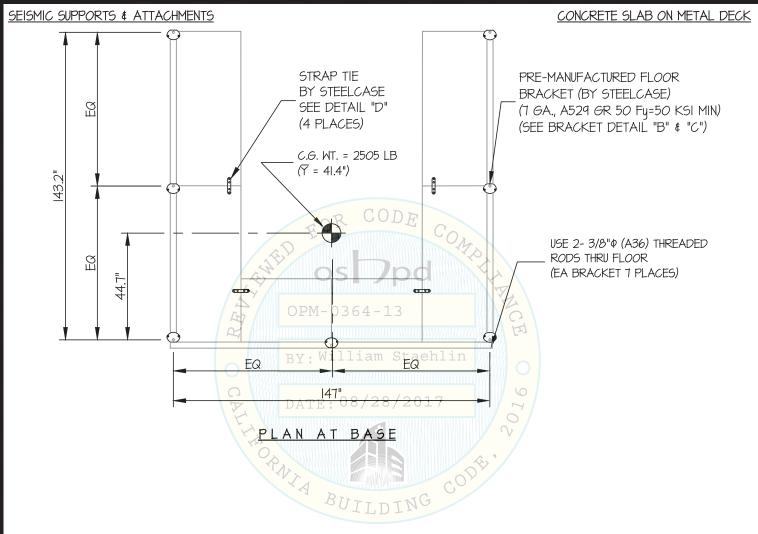



EASE

EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING

www.EquipmentAnchorage.com

STEELCASE INC.

DES. J. ROBERSON

15-1602


SHEET 7

ANSWÉR WORK STATION "B"

DATE 8/18/17

JOB NO.

OF 10 SHEETS

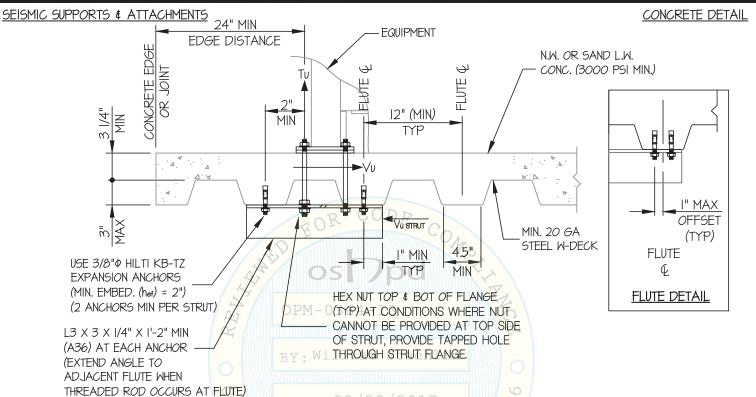

MIN STEEL DECK REQUIREMENTS AND STRUT DETAIL

ORNIA BUILDING



www.EquipmentAnchorage.com

STEELCASE INC.


DES. J. ROBERSON 15-1602


SHEET

ANSWÉR WORK STATION "B"

8/18/17 DATE

JOB NO.

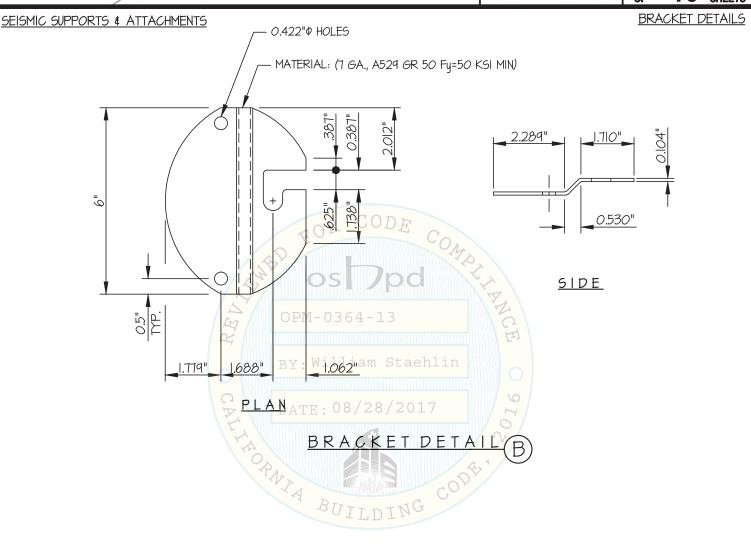



www.EquipmentAnchorage.com

STEELCASE INC.

DES. J. ROBERSON 15-1602


SHEET


ANSWÉR WORK STATION "B"

8/18/17 DATE

JOB NO.

OF

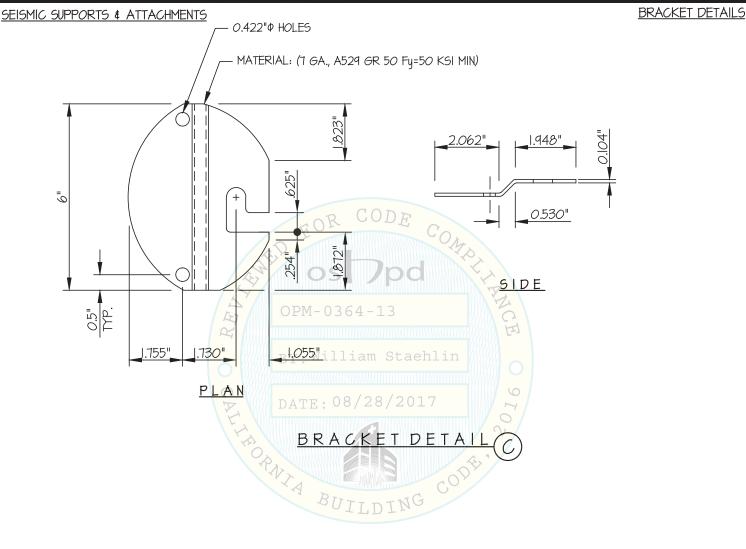

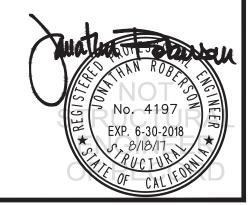

EASE

EQUIPMENT ANCHORAGE & SEISMIC ENGINEERING

www.EquipmentAnchorage.com

STEELCASE INC.

DES. J. ROBERSON

15-1602

10

ANSWÉR WORK STATION "B"

DATE 8/18/17

JOB NO.

of 10 SHEETS

SEISMIC SUPPORTS & ATTACHMENTS

BRACKET DETAILS

