



OFFICE OF STATEWIDE HEALTH PLANNING AND DEVELOPMENT
FACILITIES DEVELOPMENT DIVISION

APPLICATION FOR OSHPD PREAPPROVAL OF
MANUFACTURER'S CERTIFICATION (OPM)

OFFICE USE ONLY

APPLICATION #: OPM-0459

OSHPD Preapproval of Manufacturer's Certification (OPM)

Type: [] New [X] Renewal/Update

Manufacturer Information

Manufacturer: Premier Mounts

Manufacturer's Technical Representative: Tiffany Dozier

Mailing Address: 2620 Palisades Drive, Corona, CA 92882

Telephone: (800) 368-9700

Email: tiffany@premiermounts.com

Product Information

Product Name: AM65/AM95 ARTICULATING WALL MOUNTS

Product Type: Other Electrical & Mechanical Components

Product Model Number: AM65 & AM95

General Description: Articulating Monitor Wall Mounts

Applicant Information

Applicant Company Name: EASE LLC.

Contact Person: Tiffany Tonn

Mailing Address: 1515 FAIRVIEW AVE, STE 205, MISSOULA, MT 59801

Telephone: (406) 541-3273

Email: tiffany@easeco.com

Title: Office Manager

Access to Safe, Quality Healthcare Environments that Meet California's Diverse and Dynamic Needs

STATE OF CALIFORNIA - HEALTH AND HUMAN SERVICES AGENCY





OFFICE OF STATEWIDE HEALTH PLANNING AND DEVELOPMENT FACILITIES DEVELOPMENT DIVISION

Registered Design Professional Preparing Engineering Recommendations

Company Name: EASE

Name: Jonathan Roberson

California License Number: S4197

Mailing Address: 5877 Pine Ave., Suite 210, Chino Hills, CA 91709

Telephone: (951) 295-1892

Email: jon@EASECo.com

OSHPD Special Seismic Certification Preapproval (OSP)

Special Seismic Certification is preapproved under OSP

OSP Number: _____

Certification Method

Testing in accordance with: ICC-ES AC156 FM 1950-16

Other(s) (Please Specify): _____

*Use of criteria other than those adopted by the California Building Standards Code, 2019 (CBSC 2019) for component supports and attachments are not permitted. For distribution system, interior partition wall, and suspended ceiling seismic bracings, test criteria other than those adopted in the CBSC 2019 may be used when approved by OSHPD prior to testing.

Analysis

Experience Data

Combination of Testing, Analysis, and/or Experience Data (Please Specify): _____

OSHPD Approval

Date: 9/8/2021

Name: Kamalpreet Kalsi

Title: Senior Structural Engineer

Condition of Approval (if applicable): _____





**EQUIPMENT ANCHORAGE
& SEISMIC ENGINEERING**

5877 Pine Ave, Ste. 210
Chino Hills, CA. 91709
Phn: (909) 606-7622

Office of Statewide Health Planning and Development
PREAPPROVAL OF MANUFACTURER'S CERTIFICATION
OPM-0459

THIS PREAPPROVAL CONFORMS TO THE 2019 CALIFORNIA BUILDING CODE

MANUFACTURER: **PREMIER MOUNTS**
EQUIPMENT NAME: **AM65 & AM95 WALL MOUNTS**

Sheet: 1 of 10
Date: 2/10/21

GENERAL NOTES

1. THIS OSHPD PREAPPROVAL OF MANUFACTURER'S CERTIFICATION (OPM) IS BASED ON THE 2019 CBC. THE DEMANDS (DESIGN FORCES) FOR USE WITH THIS OPM SHALL BE BASED ON THE 2019 CBC
2. THIS DOCUMENT MAY ONLY BE USED WITH THE EXPRESS WRITTEN CONSENT OF THE MANUFACTURER LISTED ABOVE FOR THE SPECIFIC PROJECT SITE AND INSTALLATION LOCATION. THIS DOCUMENT IS INVALID WITHOUT SUCH CONSENT.
3. THIS PREAPPROVAL CONFORMS TO THE 2019 CALIFORNIA BUILDING CODE WHERE S_{ds} IS NOT GREATER THAN 0.80, 1.00 & 2.30.
4. FORCES PER ASCE 7-16 SECTION 13.3.1, EQUATIONS 13.3-1, 13.3-2 & 13.3-3,
WHERE $S_{ds} = 0.80$, $a_p = 2.5$, $I_p = 1.5$, $R_p = 2.5$, $z/h \leq 1$ AT CONCRETE WALL, $\Omega_e = 2.0$
WHERE $S_{ds} = 1.00$, $a_p = 2.5$, $I_p = 1.5$, $R_p = 2.5$, $z/h \leq 1$ AT CONCRETE WALL, $\Omega_e = 2.0$
WHERE $S_{ds} = 2.30$, $a_p = 2.5$, $I_p = 1.5$, $R_p = 2.5$, $z/h \leq 1$ AT CONCRETE WALL, $\Omega_e = 2.0$
5. THIS PREAPPROVAL COVERS ONLY THE SUPPORTS AND ATTACHMENTS OF THE EQUIPMENT TO THE STRUCTURE.
6. ALL DESIGN FORCES SHOWN ON THE DRAWINGS ARE FACTORED LOADS THAT SHALL BE USED FOR STRENGTH DESIGN.
7. CONCRETE WALL VALID FOR DEMANDS SHOWN AT ANY ELEVATION. (i.e. $z/h \leq 1$)
8. **RESPONSIBILITIES OF THE STRUCTURAL ENGINEER OF RECORD OF THE BUILDING**
 - A. PROVIDE SUPPORTING STRUCTURE TO SUPPORT WEIGHTS AND FORCES SHOWN IN ADDITION TO ALL OTHER LOADS.
 - B. VERIFY THAT THE INSTALLATION IS IN CONFORMANCE WITH THE 2019 CBC AND WITH THE DETAILS, MATERIAL AND GAGE OF THE UNIT WHERE ATTACHMENTS ARE MADE AGREE WITH THE INFORMATION SHOWN ON THE PREAPPROVAL DOCUMENTS.
 - C. VERIFY THAT PROJECT SPECIFIC VALUES OF S_{ds} & z/h RESULT IN SEISMIC FORCES (E_h , E_v) THAT DO NOT EXCEED THE VALUES ON THE DETAILS.
 - D. VERIFY THAT THE CONCRETE SLAB TO WHICH THE EQUIPMENT IS ANCHORED MEETS THE REQUIREMENTS OF THE APPLICABLE ICC ESR REPORT AND THIS OPM.
 - E. VERIFY THAT THE ANCHORS ARE AN ADEQUATE DISTANCE FROM ANY SLAB EDGES OR OPENINGS (SEE TYPICAL DETAIL ON SHEET 2).
 - F. VERIFY THAT ALL NEW OR EXISTING ANCHORS ARE AN ADEQUATE DISTANCE FROM THE UNIT ATTACHMENTS AND CHECK FOR INTERACTION WHERE OTHER ANCHORS ARE WITHIN 18" OR $6h_{ef}$ FROM THIS UNIT'S ANCHORS.



PREMIER MOUNTS

AM65 & AM95 WALL MOUNTS

DES. J. ROBERSON

JOB NO. 11-2103

DATE 2/10/21

SHEET

2

OF 10 SHEETS

9. EXPANSION ANCHORS:

A. ATTACHMENT IS TO BE MADE WITH THE ANCHORS LISTED BELOW AND INSTALLED AS DESCRIBED IN THE CORRESPONDING ICC REPORT.

Anchor Diameter	Concrete Type	Min. f'c (psi)	Anchor Type	ICC Report No.	Min. Embed.	Min. Spacing	Min. Edge Dist.	Min. Conc. Thickness	Torque Test	Direct Tension
1/4"	Normal Weight	3000	Hilti Kwik HUS	ESR-3027	1.92"	3.5"	12"	6"	N/A	779 lb

B. THIS PREAPPROVAL ALLOWS FOR UP TO A MAXIMUM OF 2 ADJACENT CONCRETE SLAB EDGES, 12" AWAY MINIMUM (i.e. - CORNER). SEE ADJACENT DETAIL FOR ADDITIONAL MINIMUM ALLOWABLE CONCRETE EDGE DISTANCES.


C. TESTING AND SPECIAL INSPECTION OF EXPANSION ANCHORS SHALL BE PERFORMED BY AN APPROVED INDEPENDENT AGENCY EMPLOYED BY THE FACILITY OWNER PER CBC 1704A & 1910A.5 AND CAC 7-149. ALL REPORTS SHALL BE SENT TO THE INSPECTOR OF RECORD, OWNER AND THE ARCHITECT OR ENGINEER IN RESPONSIBLE CHARGE.

(i) AFTER AT LEAST 24 HOURS HAVE ELAPSED SINCE INSTALLATION, DIRECT PULL TENSION TEST AT LEAST 50% OF THE ANCHORS.

(ii) ACCEPTANCE CRITERIA:

- DIRECT TENSION TEST: THE ANCHOR SHOULD HAVE NO OBSERVABLE MOVEMENT AT THE TEST LOAD. A PRACTICAL WAY TO DETERMINE OBSERVABLE MOVEMENT IS THAT THE WASHER BECOMES LOOSE.

(iii) IF ANY ANCHOR FAILS, TEST ALL ANCHORS.

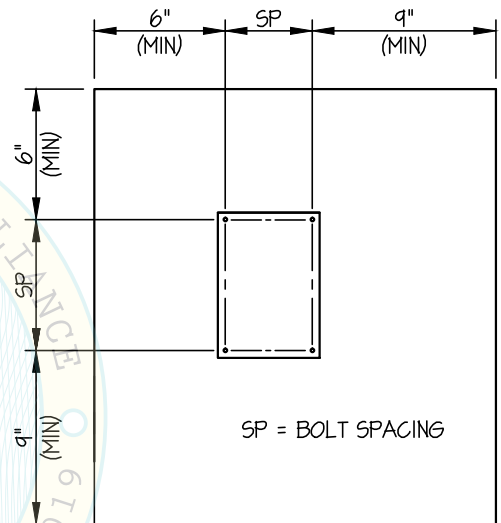

TYPICAL CONCRETE EDGE DETAIL



PREMIER MOUNTS

AM65 WALL MOUNT

DES. **J. ROBERSON**

JOB NO. **11-2103**

DATE **2/10/21**


SHEET

3

OF **10** SHEETS

SEISMIC SUPPORTS & ATTACHMENTS

WALL MOUNTED

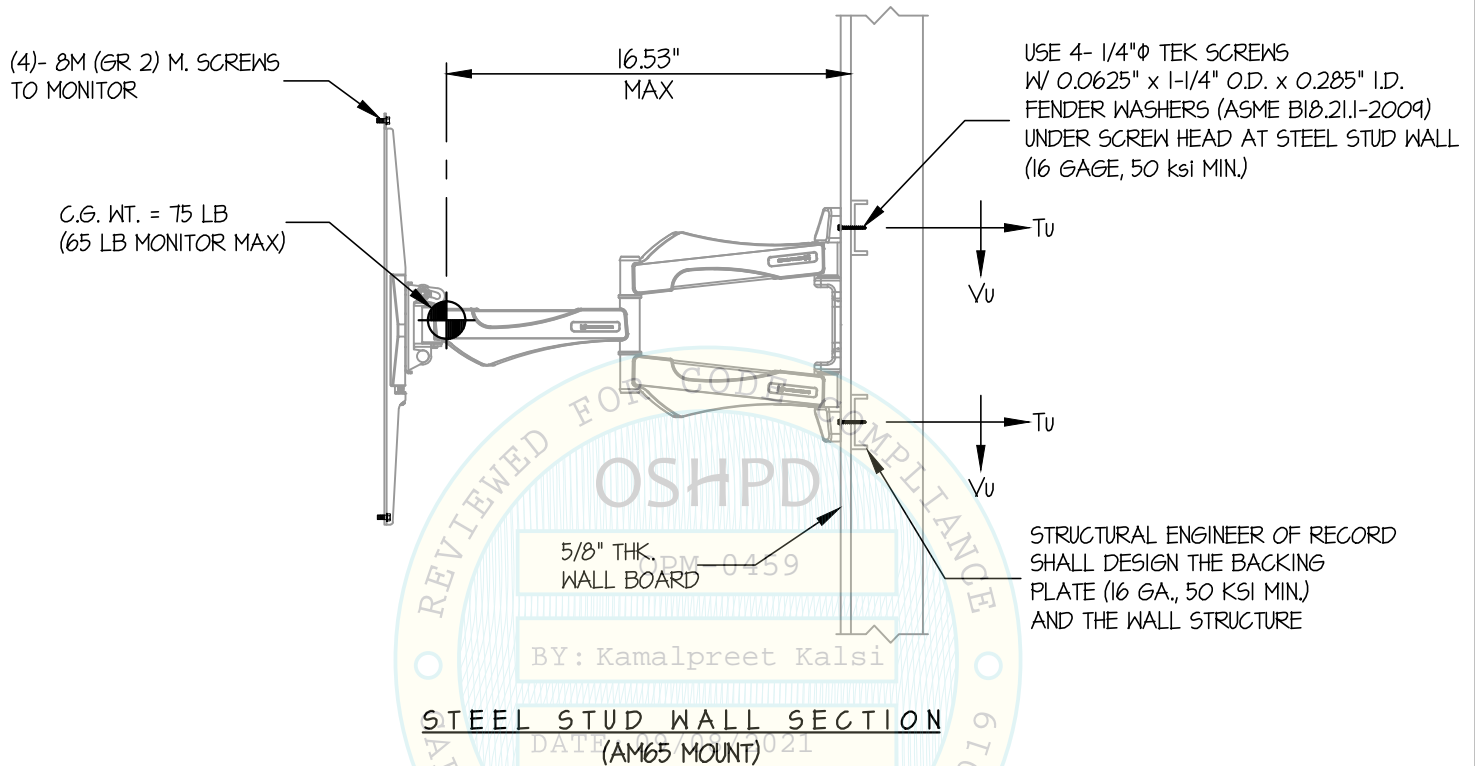


NOTES:

- FORCES ARE DETERMINED PER 2019 CALIFORNIA BUILDING CODE AND ASCE 7-16. STRENGTH DESIGN IS USED. ($a_p = 2.5, I_p = 1.5, R_p = 2.5, \Omega_o = 2.0, z/h \leq 1$)

ANCHOR	MAX Sds	Tu MAX	Vu MAX
1/4" ϕ TEK SCREW	0.80	335	60
5/16" ϕ WOOD SCREW	1.00	396	73
5/16" ϕ (GR 5) BOLTS	2.30	786	159
1/4" ϕ HILTI HUS-EZ	0.80	541	60

- CENTER OF GRAVITY (C.G.) AND WEIGHT ARE THE GOVERNING PARAMETERS FOR DESIGN. THIS PREAPPROVAL ENCOMPASSES ALL WEIGHTS UP TO THE MAXIMUM WEIGHT SHOWN.
- STRUCTURAL ENGINEER OF RECORD FOR THE BUILDING SHALL PROVIDE SUPPORT STRUCTURE DESIGNED TO SUPPORT WEIGHTS AND FORCES SHOWN IN COMBINATION WITH ALL OTHER LOADS THAT MAY BE PRESENT.

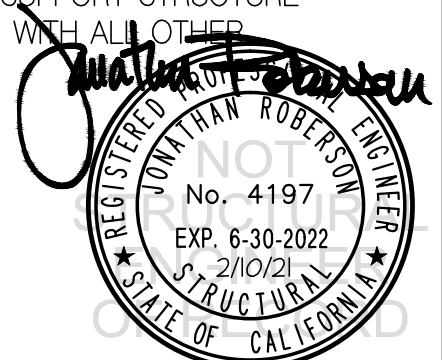


<h1>PREMIER MOUNTS</h1> <h2>AM65 WALL MOUNT</h2>	DES. J. ROBERSON	SHEET 4
	JOB NO. 11-2103	OF 10 SHEETS
	DATE 2/10/21	


SEISMIC SUPPORTS & ATTACHMENTS

MAX S_{D5} ≤ 0.80

WALL MOUNTED

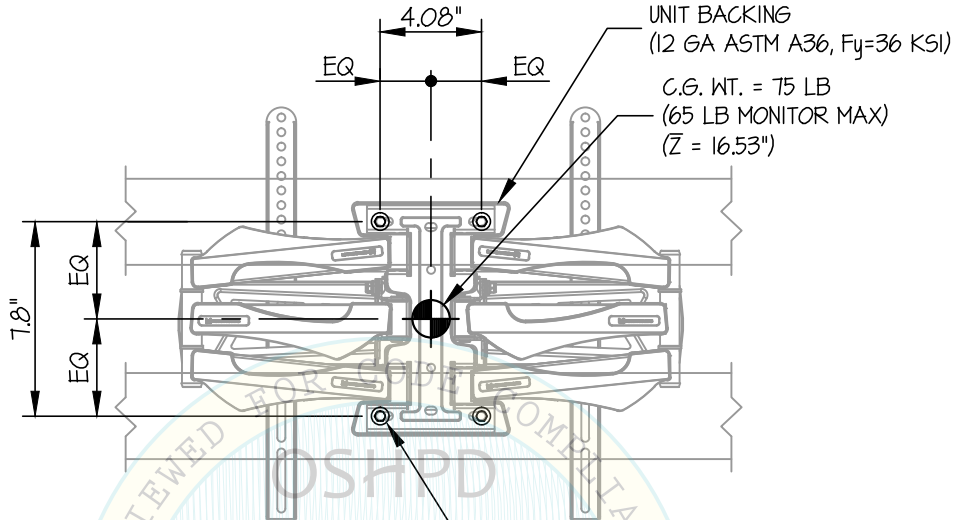

T_u = 335 LB/SCREW (MAX)
V_u = 60 LB/SCREW (MAX)

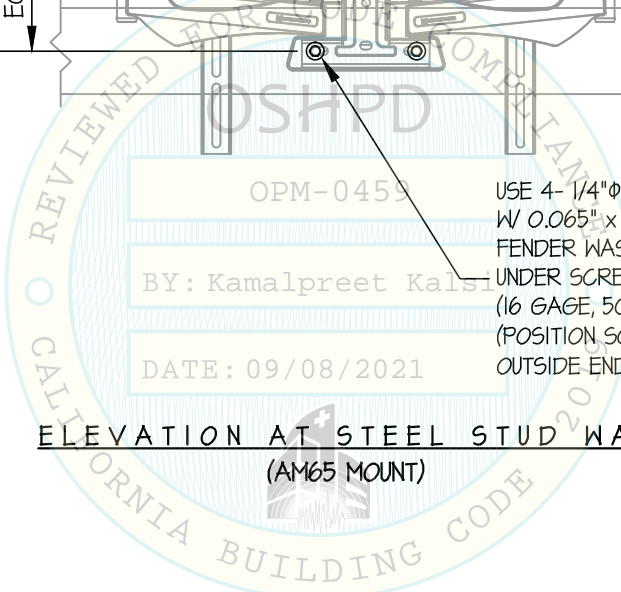

USE 4- 1/4" Φ TEK SCREWS
W/ 0.065" x 1-1/4" O.D. x 0.285" I.D.
FENDER WASHERS (ASME B18.21.1-2009)
UNDER SCREW HEAD AT STEEL STUD WALL
(16 GAGE, 50 ksi MIN.)
(POSITION SCREWS TO
OUTSIDE END OF SLOTS AS SHOWN)

ELEVATION AT STEEL STUD WALL
(AM65 MOUNT)

Jonathan Roberson
REGISTERED PROFESSIONAL ENGINEER
No. 4197
EXP. 6-30-2022
2/10/21
STRUCTURAL
STATE OF CALIFORNIA

PREMIER MOUNTS

AM65 WALL MOUNT

DES. J. ROBERSON

JOB NO. 11-2103

DATE 2/10/21

SHEET


5

OF 10 SHEETS

SEISMIC SUPPORTS & ATTACHMENTS

MAX $S_{Ds} \leq 1.00$

WALL MOUNTED

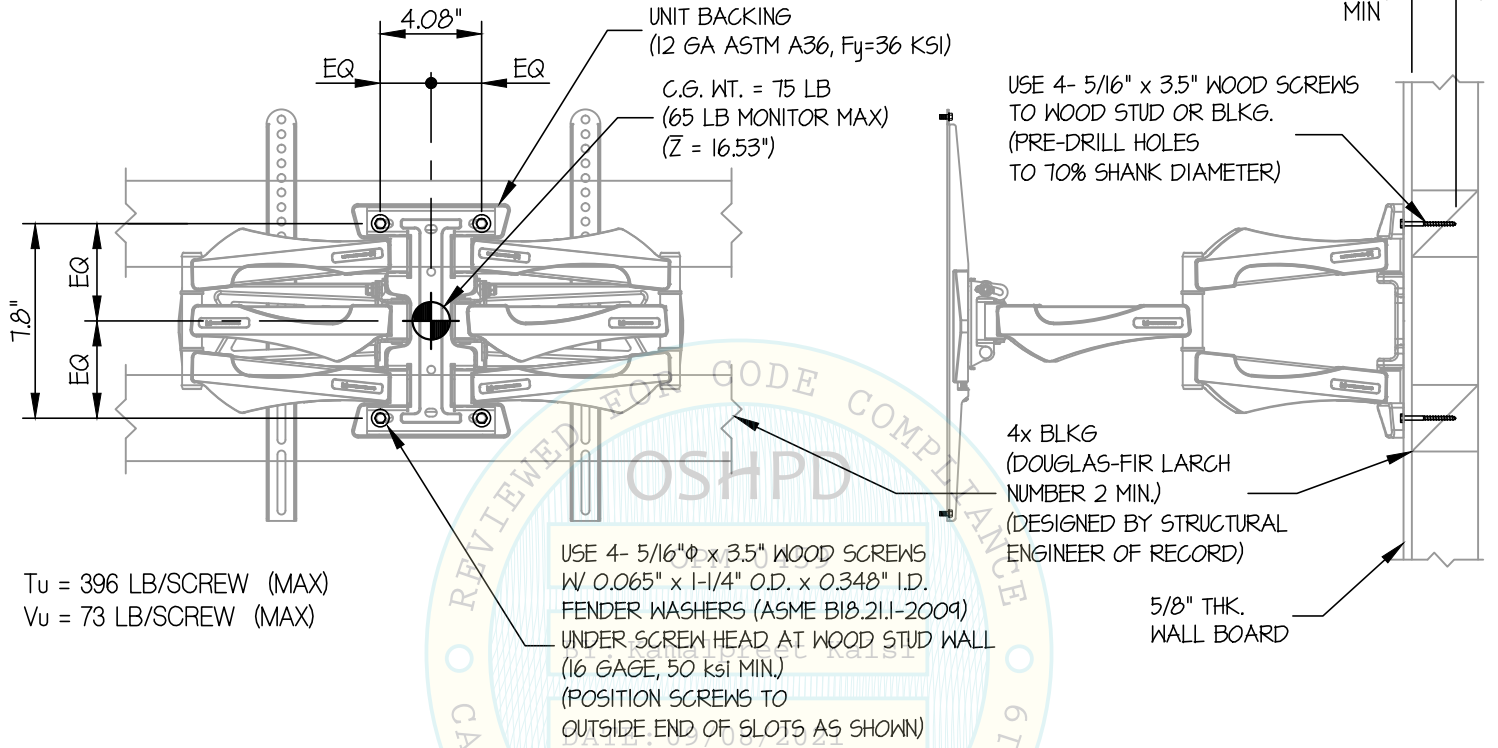

ELEVATION AT WOOD STUD WALL
(AM65 MOUNT)

WOOD STUD WALL SECTION
(AM65 MOUNT)

Jonathan Roberson

REGISTERED PROFESSIONAL ENGINEER
No. 4197
EXP. 6-30-2022
2/10/21
STRUCTURAL
STATE OF CALIFORNIA

PREMIER MOUNTS
AM65 WALL MOUNT


DES. **J. ROBERSON**
JOB NO. **11-2103**
DATE **2/10/21**

SHEET **6**
OF **10** SHEETS

SEISMIC SUPPORTS & ATTACHMENTS

MAX Sds ≤ 2.30

WALL MOUNTED

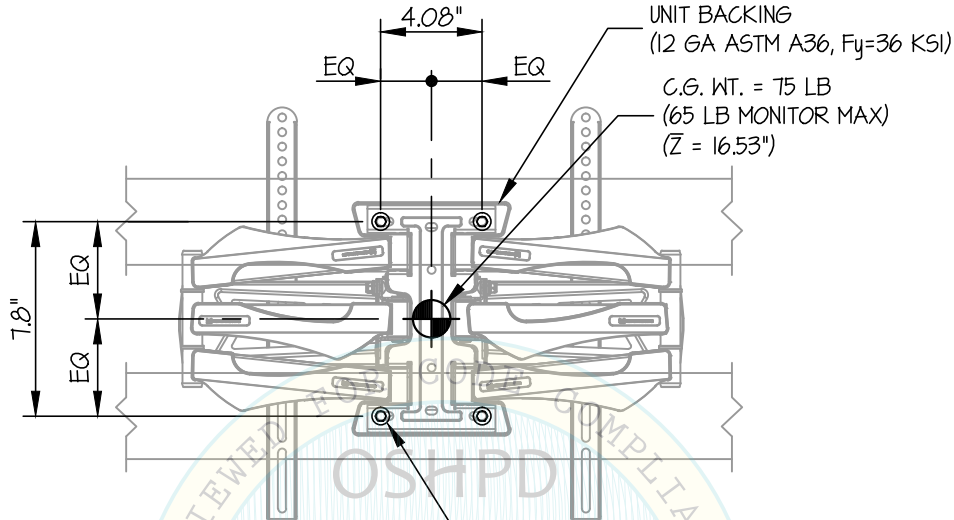


UNIT BACKING
(12 GA ASTM A36, Fy=36 KSI)
C.G. WT. = 75 LB
(65 LB MONITOR MAX)
(Z̄ = 16.53")

Tu = 786 LB/BOLT (MAX)
Vu = 159 LB/BOLT (MAX)

OPM-0459
BY: Kamalpreet Kalsi
DATE: 09/08/2021
USE 4- 5/16" φ (GR 5) BOLTS
W/ 0.0625" x 1-1/4" O.D. x 0.348" I.D.
FENDER WASHERS (ASME B18.21.1-2009)
UNDER BOLT HEAD AT STEEL STUD WALL
(16 GAGE, 50 ksi MIN.)
(POSITION BOLTS TO
OUTSIDE END OF SLOTS AS SHOWN)

ELEVATION AT STEEL STUD WALL
(AM65 MOUNT)

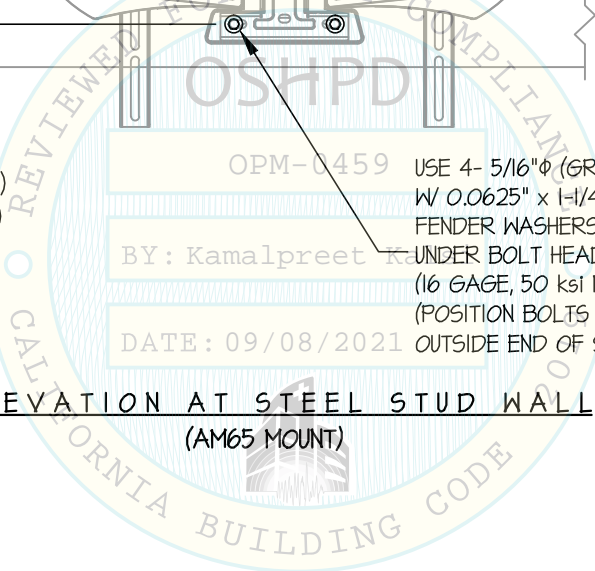

Jonathan Roberson
REGISTERED PROFESSIONAL ENGINEER
JONATHAN ROBERSON
No. 4197
EXP. 6-30-2022
2/10/21
STRUCTURAL
STATE OF CALIFORNIA

PREMIER MOUNTS

AM65 WALL MOUNT

DES. **J. ROBERSON**

JOB NO. **11-2103**

DATE **2/10/21**

SHEET


7

OF **10** SHEETS

SEISMIC SUPPORTS & ATTACHMENTS

MAX $S_{Ds} \leq 0.80$

WALL MOUNTED

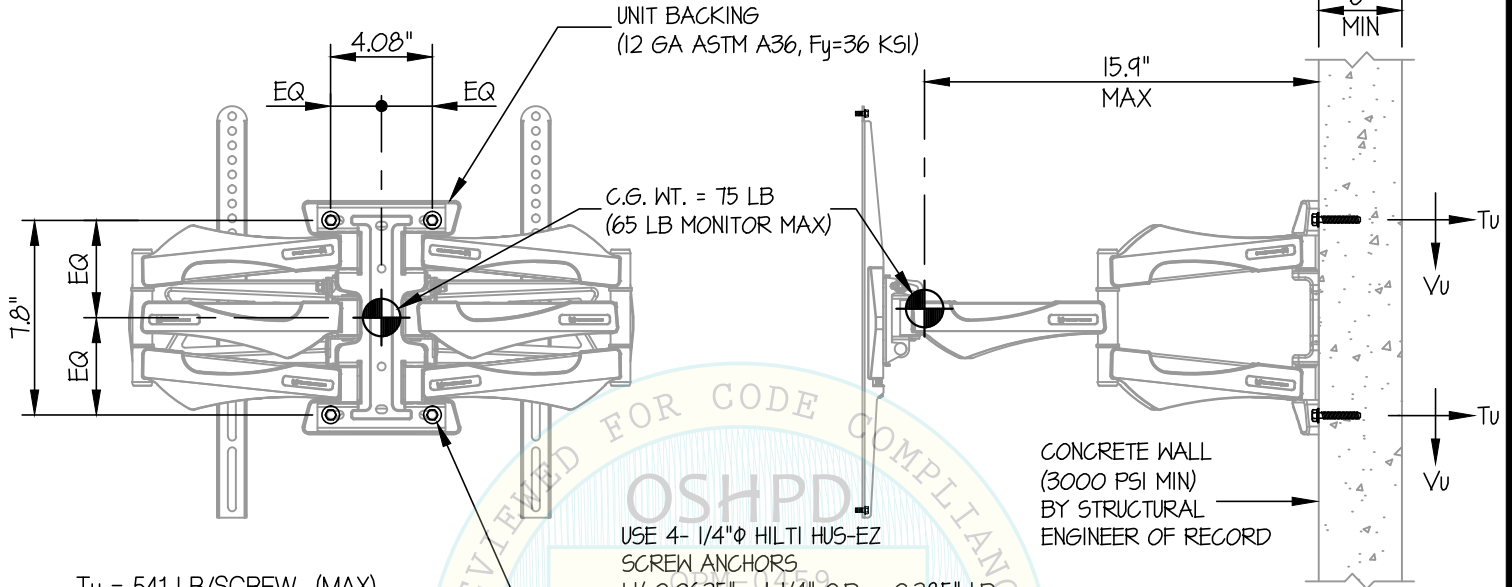


$T_u = 541 \text{ LB/SCREW (MAX)}$
 $V_u = 60 \text{ LB/SCREW (MAX)}$
(VALUES INCLUDE Ω)

USE 4- $1/4"$ ϕ HILTI HUS-EZ
SCREW ANCHORS
W/ 0.0625" x 1-1/4" O.D. x 0.285" I.D.
FENDER WASHERS (ASME B18.21.1-2009)
UNDER SCREW HEAD AT CONCRETE WALL
(MIN. EMBED. (h_{dev}) = 1.92")
TO CONCRETE WALL
(POSITION SCREWS TO
OUTSIDE END OF SLOTS AS SHOWN)

ELEVATION AT CONCRETE WALL
(AM65 MOUNT)

CONCRETE WALL SECTION
(AM65 MOUNT)

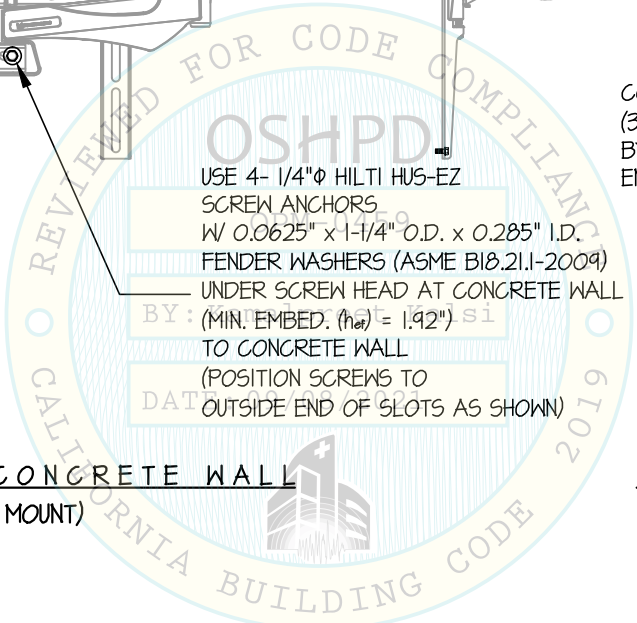

Jonathan Roberson
REGISTERED PROFESSIONAL ENGINEER
No. 4197
EXP. 6-30-2022
2/10/21
STRUCTURAL
STATE OF CALIFORNIA


PREMIER MOUNTS AM95 WALL MOUNT

DES. **J. ROBERSON**
JOB NO. **11-2103**
DATE **2/10/21**

SHEET
8
OF **10** SHEETS

SEISMIC SUPPORTS & ATTACHMENTS

WALL MOUNTED

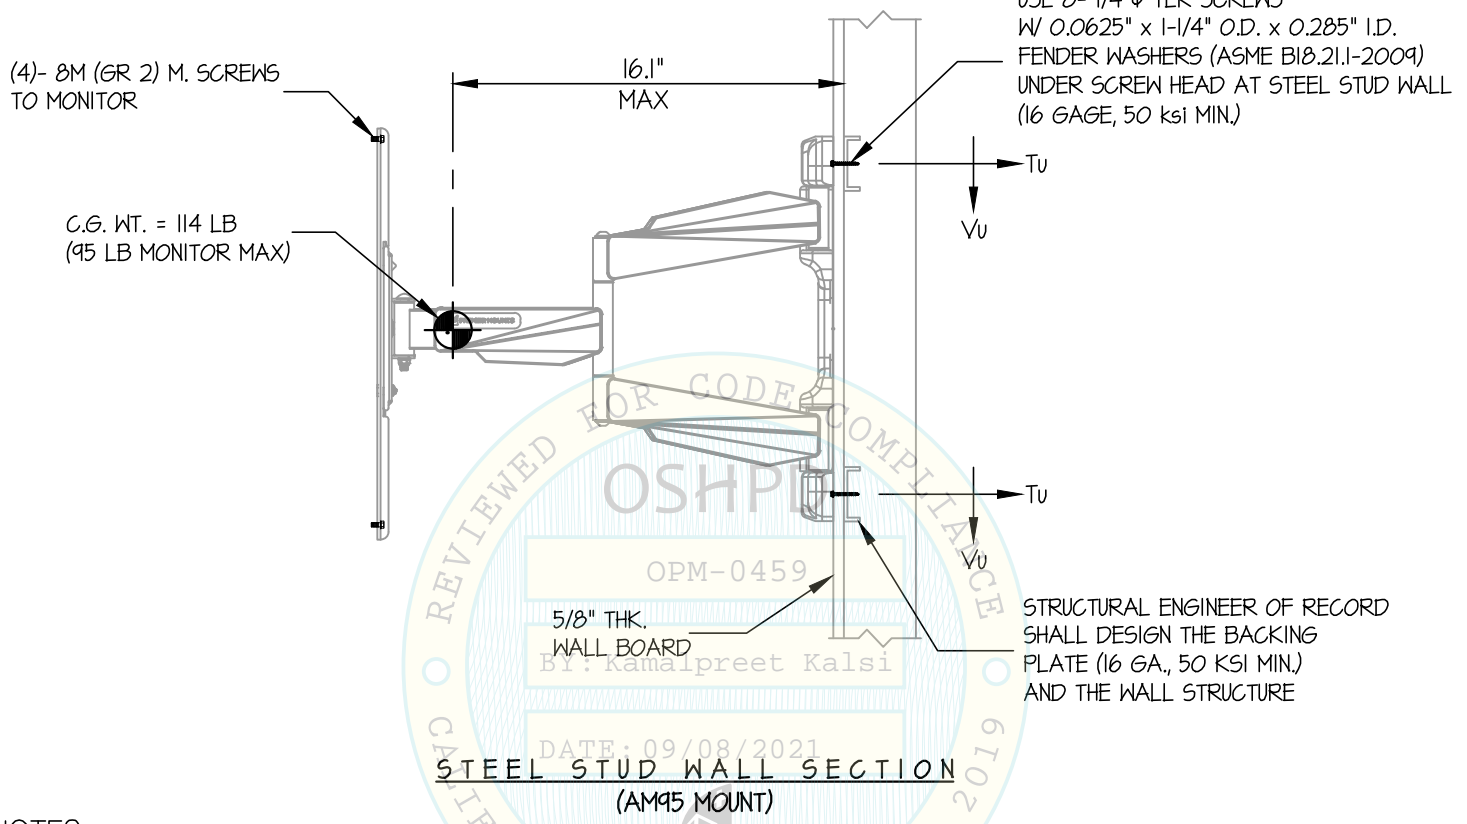

NOTES:

- FORCES ARE DETERMINED PER 2019 CALIFORNIA BUILDING CODE AND ASCE 7-16.**
STRENGTH DESIGN IS USED. ($S_Ds = 2.30$; $a_p = 2.5$; $l_p = 15$; $R_p = 2.5$; $\Omega_o = 2.0$, $z/h \leq 1$)
HORIZONTAL FORCE (E_h) = $4.14 W_p$
HORIZONTAL FORCE (E_{mh}) = $8.28 W_p$ (FOR CONCRETE ANCHORAGE)
VERTICAL FORCE (E_v) = $0.46 W_p$
- CENTER OF GRAVITY (C.G.) AND WEIGHT ARE THE GOVERNING PARAMETERS FOR DESIGN. THIS PREAPPROVAL ENCOMPASSES ALL WEIGHTS UP TO THE MAXIMUM WEIGHT SHOWN.
- STRUCTURAL ENGINEER OF RECORD FOR THE BUILDING SHALL PROVIDE SUPPORT STRUCTURE DESIGNED TO SUPPORT WEIGHTS AND FORCES SHOWN IN COMBINATION WITH ALL OTHER LOADS THAT MAY BE PRESENT.

Jonathan Roberson
REGISTERED PROFESSIONAL ENGINEER
JONATHAN ROBERSON
No. 4197
EXP. 6-30-2022
2/10/21
STRUCTURAL
STATE OF CALIFORNIA

PREMIER MOUNTS

AM95 WALL MOUNT

DES. J. ROBERSON

JOB NO. 11-2103


DATE 2/10/21

SHEET

9

OF 10 SHEETS

SEISMIC SUPPORTS & ATTACHMENTS

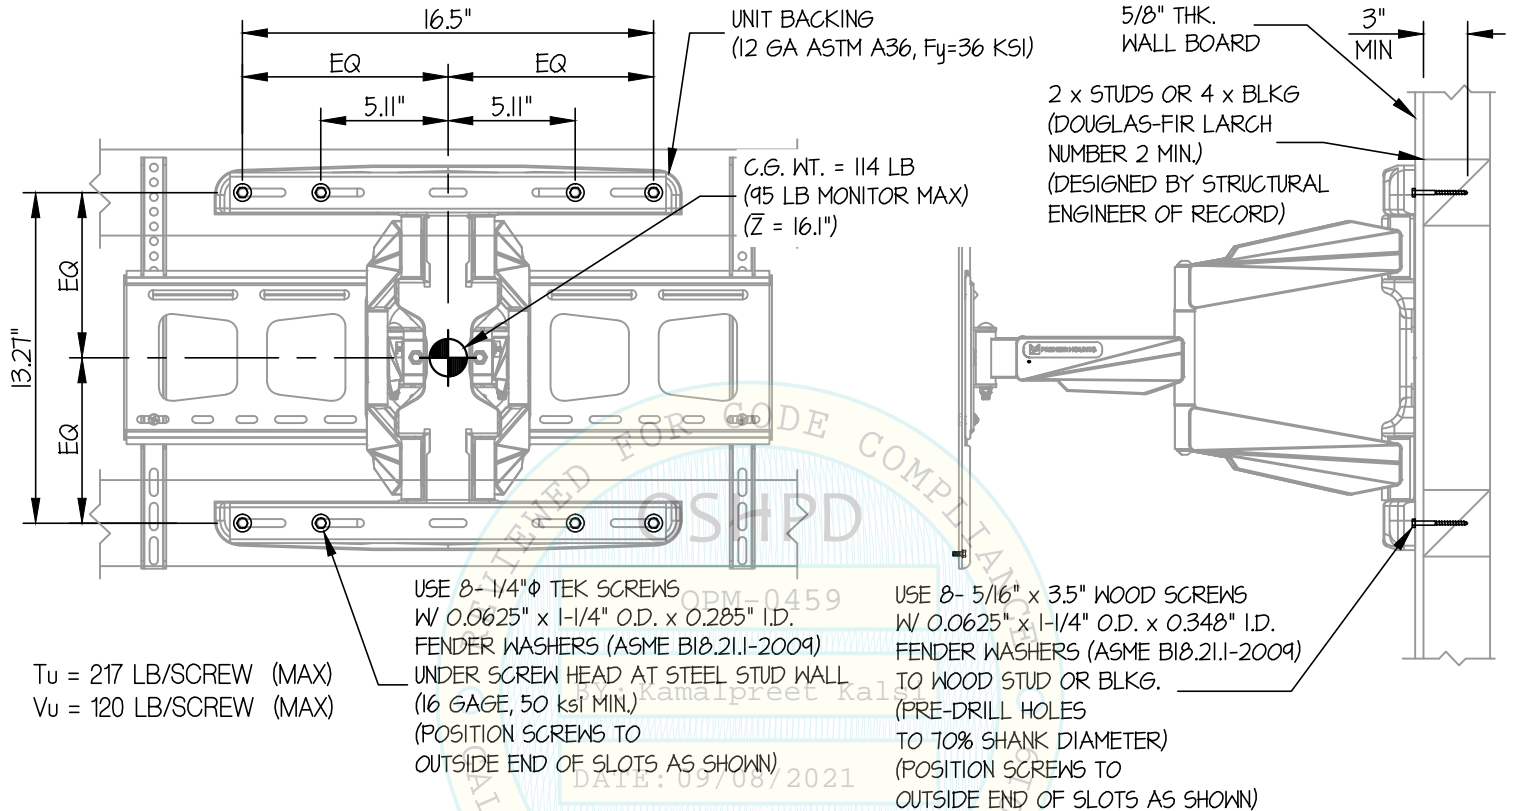

ELEVATION AT STEEL STUD WALL (AM95 MOUNT)

WOOD STUD WALL SECTION (AM95 MOUNT)

Jonathan Roberson

REGISTERED PROFESSIONAL ENGINEER
JONATHAN ROBERSON
No. 4197
EXP. 6-30-2022
2/10/21
STRUCTURAL
STATE OF CALIFORNIA

PREMIER MOUNTS

AM95 WALL MOUNT

DES. J. ROBERSON

JOB NO. 11-2103

DATE 2/10/21



SHEET

10

OF 10 SHEETS

SEISMIC SUPPORTS & ATTACHMENTS

WALL MOUNTED

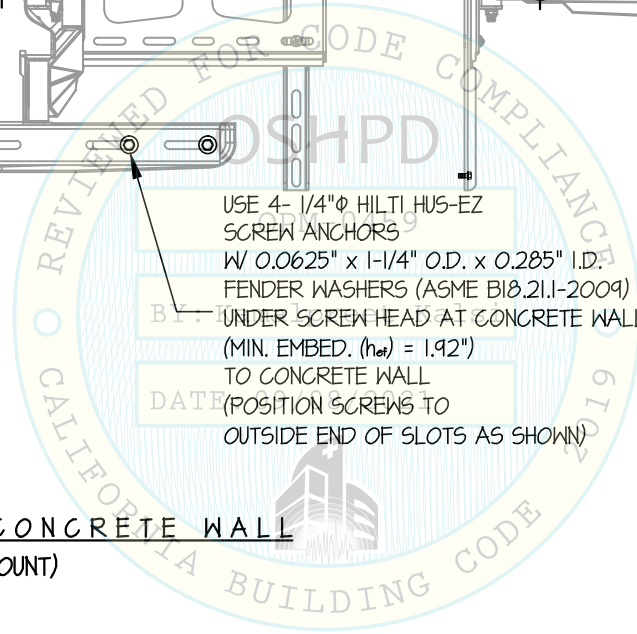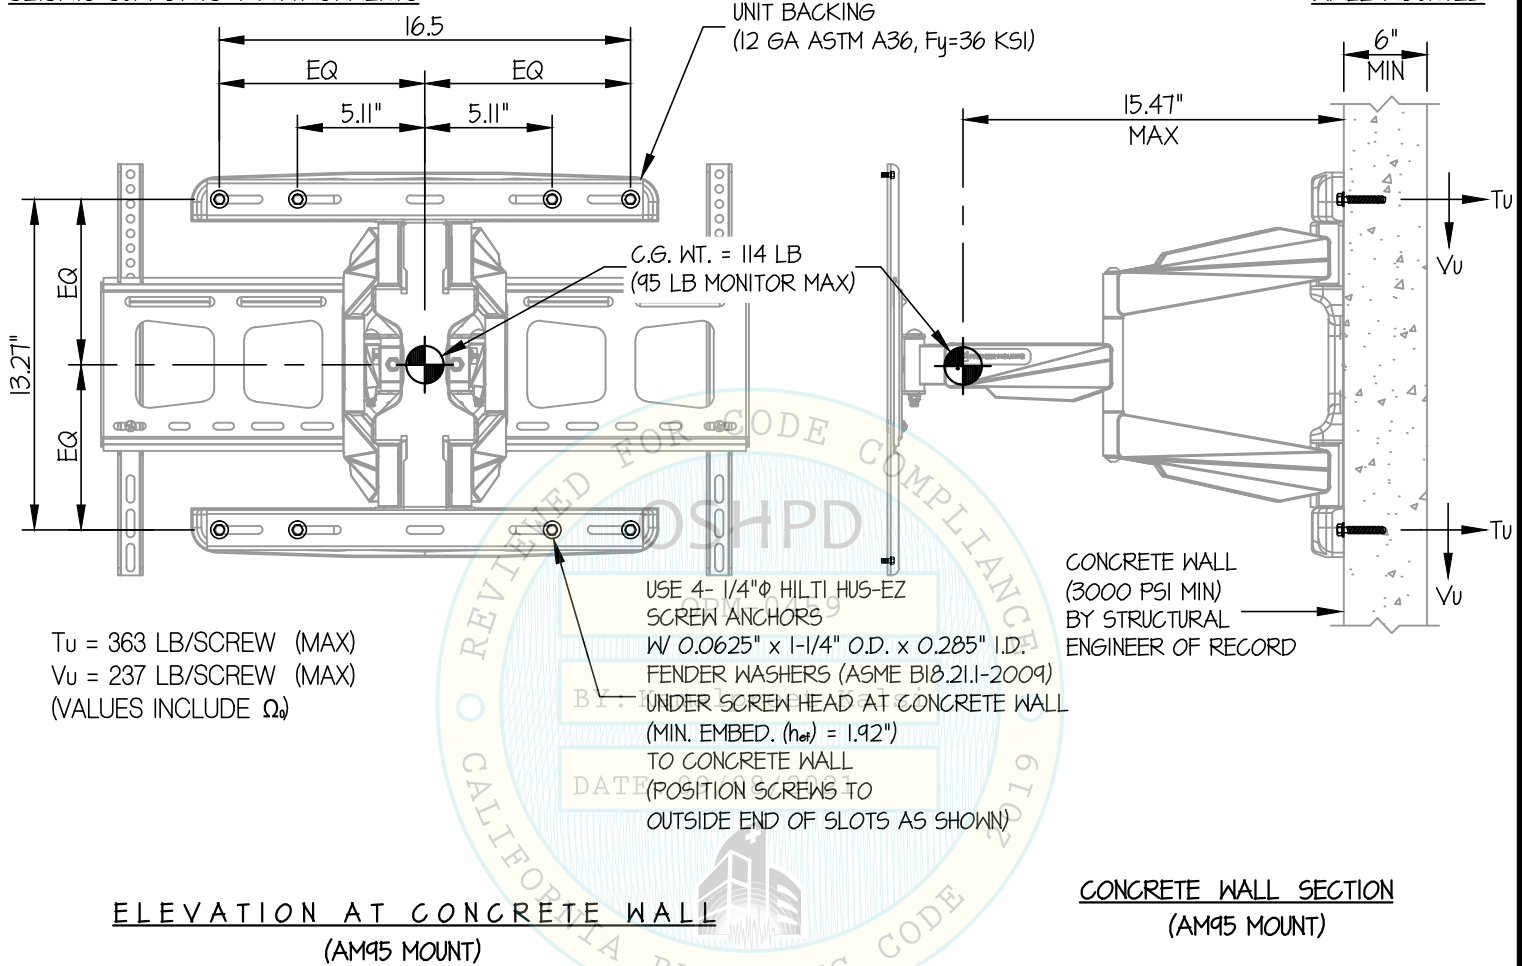

Jonathan Roberson
 REGISTERED PROFESSIONAL ENGINEER
 JONATHAN ROBERSON
 No. 4197
 EXP. 6-30-2022
 2/10/21
 STRUCTURAL
 STATE OF CALIFORNIA