



**OFFICE OF STATEWIDE HEALTH PLANNING AND DEVELOPMENT
FACILITIES DEVELOPMENT DIVISION**

**APPLICATION FOR OSHPD SPECIAL SEISMIC
CERTIFICATION PREAPPROVAL (OSP)**

OFFICE USE ONLY

APPLICATION #: OSP-0429

OSHPD Special Seismic Certification Preapproval (OSP)

Type: New Renewal

Manufacturer Information

Manufacturer: Eaton Corporation

Manufacturer's Technical Representative: Dante DeTillio

Mailing Address: W126N7250 Flint Drive, Menomonee Falls, WI 53051

Telephone: (630) 267-7773 Email: dantedetilio@eaton.com

Product Information

Product Name: Industrial Control Panels

Product Type: Variable Frequency Drives and Starters

Product Model Number: See attachments

General Description: Variable frequency drives in NEMA 1 and NEMA 3R carbon steel enclosures, containing disconnects, contactors, overloads, transformers, relays, heaters, and fuses.

Mounting Description: Rigid or Flexible, Wall Mounted

Tested Seismic Enhancements: None

Applicant Information


Applicant Company Name: The VMC Group

Contact Person: John Giuliano

Mailing Address: 113 Main Street, Bloomingdal, NJ 07403

Telephone: (973) 838-1780 Email: john.giuliano@thvmcgroup.com

Title: President

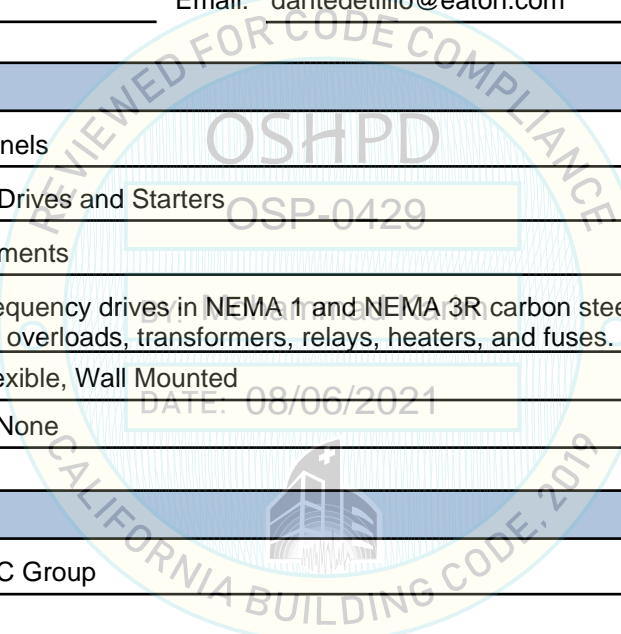



**OFFICE OF STATEWIDE HEALTH PLANNING AND DEVELOPMENT
FACILITIES DEVELOPMENT DIVISION**

California Licensed Structural Engineer Responsible for the Engineering and Test Report(s)


Company Name: THE VMC GROUP
Name: Kenneth Tarlow California License Number: S2851
Mailing Address: 980 9th Street, 16th Floor, Sacramento, CA 95814
Telephone: (832) 627-2214 Email: ken.tarlow@thevmcgroup.com

Certification Method

GR-63-Core ICC-ES AC156 IEEE 344 IEEE 693 NEBS 3
 Other (Please Specify): _____

Testing Laboratory

Company Name: DYNAMIC CERTIFICATION LABORATORY (DCL)
Contact Person: Kelly Laplace
Mailing Address: 1315 Greg St., Ste 109, Sparks NV 89431
Telephone: (775) 358-5085 Email: kelly@shaketest.com

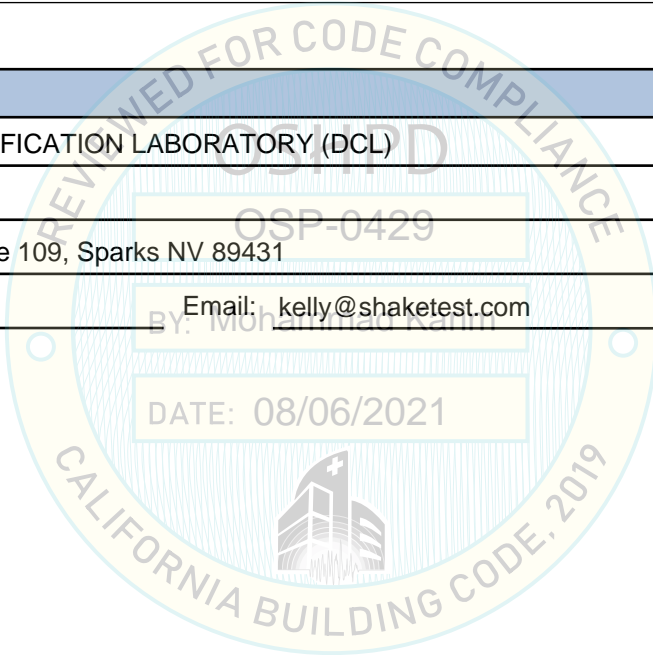



**OFFICE OF STATEWIDE HEALTH PLANNING AND DEVELOPMENT
FACILITIES DEVELOPMENT DIVISION**

Seismic Parameters

Design Basis of Equipment or Components (F_p/W_p) = 1.88 (Rigid), 5.63 (Flexible)

SDS (Design spectral response acceleration at short period, g) = 2.5

a_p (Amplification factor) = 2.5

R_p (Response modification factor) = 6.0 (Rigid), 2.0 (Flexible)

Ω_0 (System overstrength factor) = 2.0

I_p (Importance factor) = 1.5

z/h (Height ratio factor) = 1

Natural frequencies (Hz) = See attachments

Overall dimensions and weight = See attachments


OSHPD Approval (For Office Use Only) - Approval Expires on 12/31/2025

Date: 8/6/2021

Name: Mohammad Karim Title: Supervisor, Health Facilities

Special Seismic Certification Valid Up to: SDS (g) = 2.5 z/h = 1

Condition of Approval (if applicable): DATE: 08/06/2021

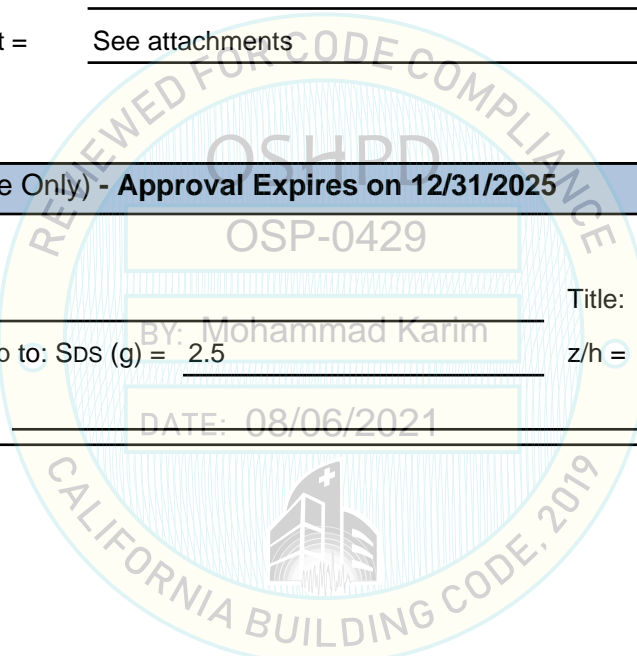

Special Seismic Certification Certified Components



Manufacturer: Eaton Corporation

Product Line: Variable Frequency Drives

Certified Product Construction: Galvanized carbon steel and painted carbon steel enclosures, NEMA 1 and 3R

Certified Options: 208-230/480V; drives, disconnects, contactors, overloads, transformers, relays, heaters and fuses

Mounting Description: Rigid or flexible wall mount

Seismic Level: Sds= 2.5g, z/h=1.0

Manufacturer	Panel Description	Model	VFD Frame	Design	Enclosure Material	NEMA Rating	Voltage (V)		Enclosure				Mounting	Unit
							208, 230, 460		Size					
							Min HP	Max HP	Height (in.)	Width (in.)	Depth (in.)	Weight (lb)		
Eaton	VFD without Bypass and with Fused and Non-Fused Disconnects	HMXE	4, 5	A1	Galvanized carbon steel or painted carbon steel	1	1	7.5	20.5	8.3	10.0	28	Rigid or flexible wall mount	UUT4-r,f
			5	A2			7.5	15	26.5	8.3	10.4	63		
			5,6	A3			15	30	32.5	9.0	10.2	115		
			6,7,8	A4			25	75	40.5	12.0	13.5	362		
			8	A5			100	100	43.0	12.0	15.1	366		
			8	A6			50	125	48.0	16.0	18.6	366		
	VFD with Bypass and with Fused and Non-Fused Disconnects	HMXE	4,5	B1	Painted carbon steel	3R	1	7.5	23.0	16.0	14.2	61	Rigid or flexible wall mount	UUT1-r,f
			5	B2			7.5	15	26.0	16.0	14.3	95		
			5,6	B3			15	30	27.5	19.0	14.2	160		
			6,7,8	B4			25	75	39.5	30.0	16.2	460		
			8	B5			100	100	44.0	33.0	16.3	461		
			8	B6			50	125	44.0	33.0	16.3	465		
	VFD without Bypass and with Fused and Non-Fused Disconnects	HMXE	4,5	C1	Painted carbon steel	3R	1	7.5	22.4	13.0	12.4	75	Rigid or flexible wall mount	Interpolated
			5	C2			7.5	15	28.4	13.0	12.4	87		
			5,6	C3			15	30	31.9	16.0	12.4	140		
			6,7,8	C4			25	75	43.4	15.5	14.4	388		
			8	C5			100	100	47.5	19.3	16.4	405		
			8	C6			50	125	54.6	20.8	19.4	405		
	VFD with Bypass and with Fused and Non-Fused Disconnects	HMXE	4,5	D1	Painted carbon steel	3R	1	7.5	19.5	16.0	15.4	102	Rigid or flexible wall mount	Interpolated
			5	D2			7.5	15	22.5	16.0	15.4	116		
			5,6	D3			15	30	28.0	19.0	15.4	180		
			6,7,8	D4			25	75	40.0	26.0	16.4	423		
			8	D5			100	100	44.0	30.0	20.4	455		
			8	D6			50	125	50.0	30.0	20.4	460		

**Special Seismic Certification
Certified Subcomponents**




Manufacturer: Eaton Corporation

Product Line: Variable Frequency Drives

Subcomponent: Drives

Drives							
Model Number	Manufacturer	Power		Enclosure Material	Unit		
		Current (A)	Voltage (V)				
HMX32AG4D821-N	Eaton	4.8	208/230	Painted carbon steel or galvanized carbon steel	UUT4-r,f		
HMX32AG8D021-N		8			Interpolated		
HMX32AG01121-N		11			Interpolated		
HMX32AG01821-N		18			Interpolated		
HMX32AG03121-N		31			Interpolated		
HMX32AG04821-N		48			Interpolated		
HMX32AG04822-N		48			Interpolated		
HMX32AG06221-N		62			Interpolated		
HMX32AG07521-N		75			Interpolated		
HMX32AG08821-N		88			Interpolated		
HMX32AG14021-N		140			Interpolated		
HMX32AG17021-N		170			Interpolated		
HMX34AG3D421-N		3.4			480	Painted carbon steel or galvanized carbon steel	Interpolated
HMX34AG4D821-N		4.8					Interpolated
HMX34AG5D621-N		5.6					Interpolated
HMX34AG9D621-N		9.6	Interpolated				
HMX34AG01221-N		12	UUT1-r,f				
HMX34AG01621-N		16	Interpolated				
HMX34AG02321-N		23	Interpolated				
HMX34AG03121-N		31	Interpolated				
HMX34AG03821-N		38	Interpolated				
HMX34AG04621-N		46	Interpolated				
HMX34AG06121-N		61	Interpolated				
HMX34AG07221-N		72	Interpolated				
HMX34AG08721-N		87	Interpolated				
HMX34AG10521-N		105	Interpolated				
HMX34AG14021-N		140	Interpolated				
HMX34AG17021-N		170	Interpolated				

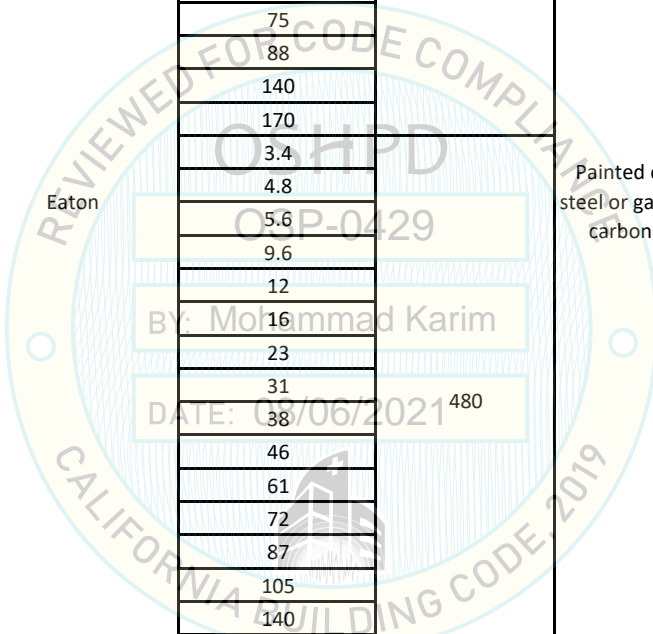

**Special Seismic Certification
Certified Subcomponents**




Manufacturer: Eaton Corporation

Product Line: Variable Frequency Drives

Subcomponent: Disconnects

Disconnects				
Model Number	Manufacturer	Description	Material	Unit
R5A3030U	Eaton	NON-FUSIBLE, 30A	Molded plastic, copper, plated carbon steel	UUT1-r,f, UUT4-r,f
R5B3060U	Eaton	NON-FUSIBLE, 60A	Molded plastic, copper, plated carbon steel	Interpolated
R9C3100U	Eaton	NON-FUSIBLE, 100A	Molded plastic, copper, plated carbon steel	Interpolated
R9D3100U	Eaton	NON-FUSIBLE, 100A	Molded plastic, copper, plated carbon steel	Interpolated
R9D3200U	Eaton	NON-FUSIBLE, 200A	Molded plastic, copper, plated carbon steel	UUT2-r,f
R9J3030FJ	Eaton	FUSIBLE, 30A	Molded plastic, copper, plated carbon steel	UUT2-r,f
R9J3060FJ	Eaton	FUSIBLE, 60A	Molded plastic, copper, plated carbon steel	Interpolated
R9K3060FJ	Eaton	FUSIBLE, 60A	Molded plastic, copper, plated carbon steel	Interpolated
R9K3100FJ	Eaton	FUSIBLE, 100A	Molded plastic, copper, plated carbon steel	Interpolated
R9L3200FJ	Eaton	FUSIBLE, 200A	Molded plastic, copper, plated carbon steel	UUT2-r,f

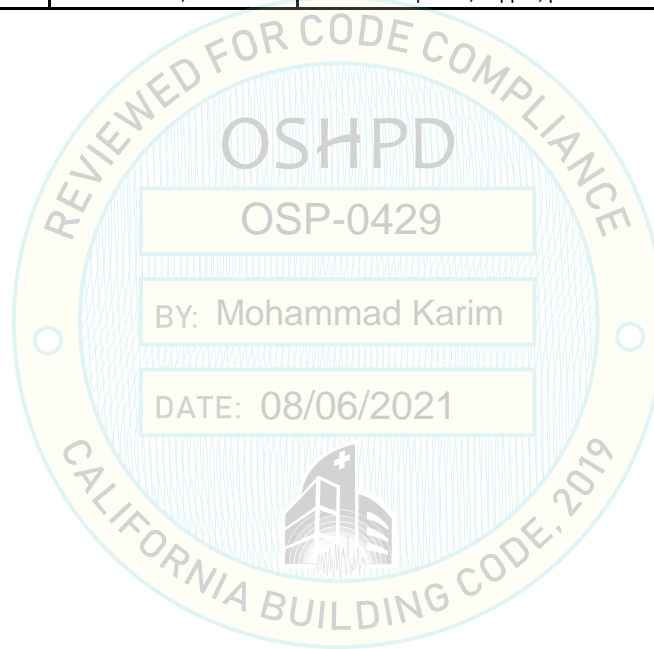

**Special Seismic Certification
Certified Subcomponents**



Manufacturer: Eaton Corporation

Product Line: Variable Frequency Drives

Subcomponent: Contactors

Contactors				
Model Number	Manufacturer	Current (A)	Material	Unit
XTCE007B01A	Eaton	7	Molded plastic, copper, plated carbon steel	UUT1-r,f
XTCE009B01A	Eaton	9	Molded plastic, copper, plated carbon steel	Interpolated
XTCE012B01A	Eaton	12	Molded plastic, copper, plated carbon steel	Interpolated
XTCE018C01A	Eaton	18	Molded plastic, copper, plated carbon steel	Interpolated
XTCE025C01A	Eaton	25	Molded plastic, copper, plated carbon steel	Interpolated
XTCE032C01A	Eaton	32	Molded plastic, copper, plated carbon steel	Interpolated
XTCE040DS1A	Eaton	40	Molded plastic, copper, plated carbon steel	Interpolated
XTCE050DS1A	Eaton	50	Molded plastic, copper, plated carbon steel	Interpolated
XTCE065DS1A	Eaton	65	Molded plastic, copper, plated carbon steel	Interpolated
XTCE080FS1A	Eaton	80	Molded plastic, copper, plated carbon steel	Interpolated
XTCE095FS1A	Eaton	95	Molded plastic, copper, plated carbon steel	Interpolated
XTCE115GS1A	Eaton	115	Molded plastic, copper, plated carbon steel	Interpolated
XTCE170GS1A	Eaton	170	Molded plastic, copper, plated carbon steel	UUT2-r,f



**Special Seismic Certification
Certified Subcomponents**




Manufacturer: Eaton Corporation

Product Line: Variable Frequency Drives

Subcomponent: Overloads

Overloads					
Model Number	Manufacturer	Description	Material	Weight (lb)	Unit
XTOB012BC1	Eaton	Electric Overload	Molded plastic, copper, plated carbon steel	0.3	UUT1-r,f
XTOB006BC1	Eaton		Molded plastic, copper, plated carbon steel	0.3	Interpolated
XTOB010BC1	Eaton		Molded plastic, copper, plated carbon steel	0.3	Interpolated
XTOB024CC1	Eaton		Molded plastic, copper, plated carbon steel	0.3	Interpolated
XTOB032CC1	Eaton		Molded plastic, copper, plated carbon steel	0.3	Interpolated
XTOB016CC1	Eaton		Molded plastic, copper, plated carbon steel	0.3	Interpolated
XTOB2P4BC1	Eaton		Molded plastic, copper, plated carbon steel	0.3	Interpolated
XTOB004BC1	Eaton		Molded plastic, copper, plated carbon steel	0.3	Interpolated
XTOB040DC1	Eaton		Molded plastic, copper, plated carbon steel	0.6	Interpolated
XTOB075DC1	Eaton		Molded plastic, copper, plated carbon steel	0.6	Interpolated
XTOB057DC1	Eaton		Molded plastic, copper, plated carbon steel	0.6	Interpolated
XTOB065DC1	Eaton		Molded plastic, copper, plated carbon steel	0.6	Interpolated
XTOB070GC1	Eaton		Molded plastic, copper, plated carbon steel	2.9	Interpolated
XTOB100GC1	Eaton		Molded plastic, copper, plated carbon steel	3.0	Interpolated
XTOB125GC1	Eaton		Molded plastic, copper, plated carbon steel	3.0	Interpolated
XTOB175GC1	Eaton		Molded plastic, copper, plated carbon steel	3.0	Interpolated
XTOB150GC1	Eaton		Molded plastic, copper, plated carbon steel	3.0	UUT2-r,f

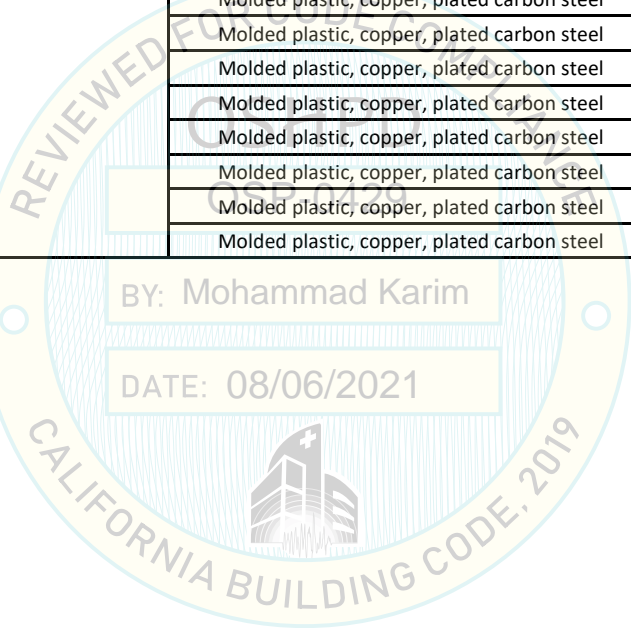

**Special Seismic Certification
Certified Subcomponents**




Manufacturer: MTE

Product Line: Variable Frequency Drives

Subcomponent: Transformers

Transformers				
Model Number	Manufacturer	Description	Material	Unit
C0075E5EFB	MTE	75W	Iron	UUT1-r,f
C0200E5EFB	MTE	200W	Iron	Interpolated
C0350E5EFB	MTE	350W	Iron	Interpolated
C0500E5EFB	MTE	500W	Iron	UUT2-r,f

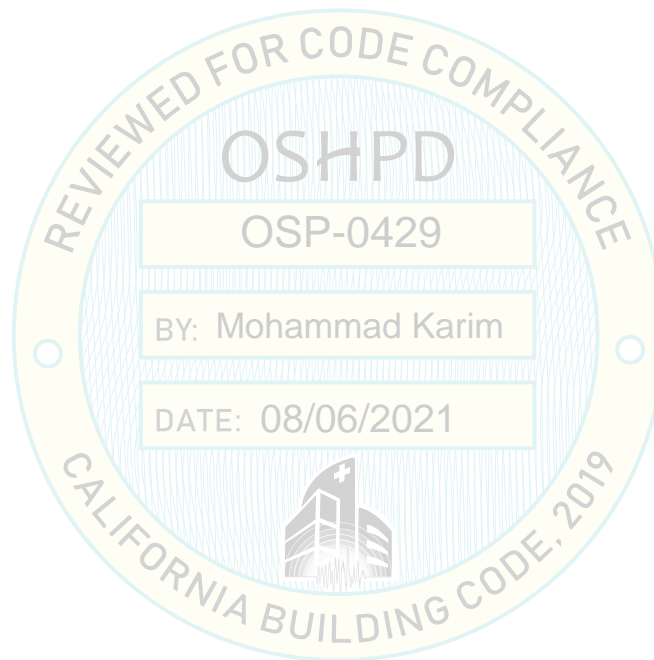

**Special Seismic Certification
Certified Subcomponents**




Manufacturer: Eaton Corporation

Product Line: Variable Frequency Drives

Subcomponent: Relays

Relays				
Model Number	Manufacturer	Description	Material	Unit
D2PR4A	Eaton	Run relay	Molded plastic, copper, plated carbon steel	UUT1-r,f, UUT2-r,f
D2PAP	Eaton	Relay socket	Molded plastic, copper, plated carbon steel	UUT1-r,f, UUT2-r,f

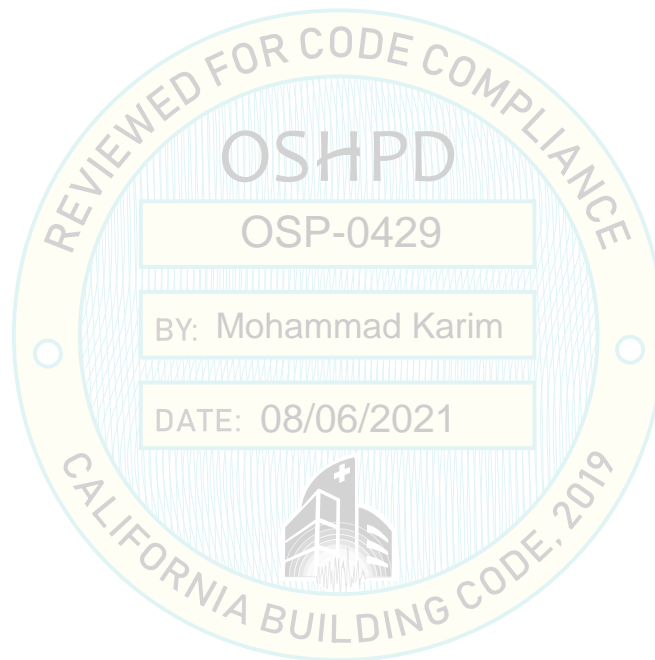

**Special Seismic Certification
Certified Subcomponents**




Manufacturer: Stego

Product Line: Variable Frequency Drives

Subcomponent: Heaters

Heaters				
Model Number	Manufacturer	Description	Material	Unit
02800.9-00	Stego	150W, 120V HEATER	Molded plastic, copper, plated carbon steel	UUT2-r,f
02811.9-00	Stego	250W, 120V HEATER	Molded plastic, copper, plated carbon steel	Interpolated
02810.9-00	Stego	400W, 120V HEATER	Molded plastic, copper, plated carbon steel	UUT2-r,f
01142.9-00	Stego	THERMOSTAT (+10F to +122F)	Molded plastic, copper, plated carbon steel	UUT1-r,f, UUT2-r,f

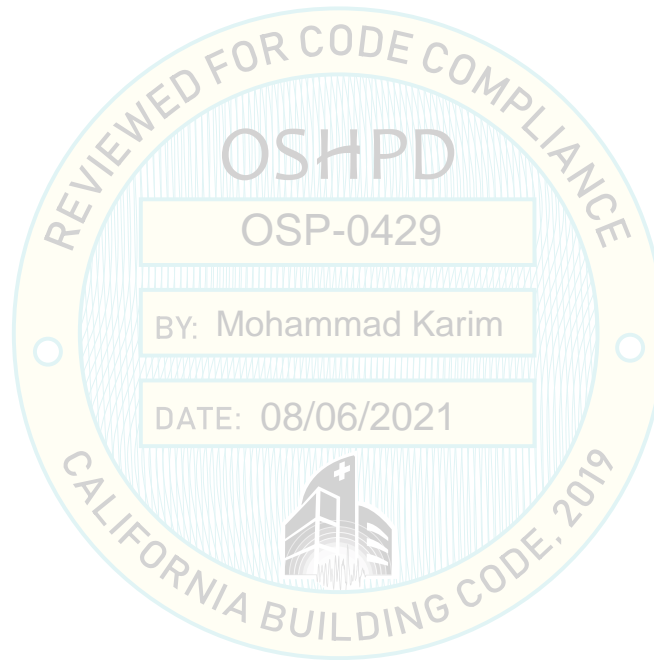

Special Seismic Certification Certified Subcomponents



Manufacturer: Bussmann

Product Line: Variable Frequency Drives

Subcomponent: Fuses

Fuses				
Model Number	Manufacturer	Description	Material	Unit
DFJ-6	Bussmann	J TYPE FUSE, 6A	Copper	UUT2-r,f
DFJ-8	Bussmann	J TYPE FUSE, 8A	Copper	Interpolated
DFJ-12	Bussmann	J TYPE FUSE, 12A	Copper	Interpolated
DFJ-20	Bussmann	J TYPE FUSE, 20A	Copper	Interpolated
DFJ-25	Bussmann	J TYPE FUSE, 25A	Copper	Interpolated
DFJ-30	Bussmann	J TYPE FUSE, 30A	Copper	Interpolated
DFJ-60	Bussmann	J TYPE FUSE, 60A	Copper	Interpolated
DFJ-100	Bussmann	J TYPE FUSE, 100A	Copper	Interpolated
DFJ-125	Bussmann	J TYPE FUSE, 125A	Copper	Interpolated
DFJ-150	Bussmann	J TYPE FUSE, 150A	Copper	Interpolated
DFJ-175	Bussmann	J TYPE FUSE, 175A	Copper	Interpolated
DFJ-200	Bussmann	J TYPE FUSE, 200A	Copper	UUT2-r,f
LPJ-6SP	Bussmann	J TYPE FUSE, 6A	Copper	UUT2-r,f
LPJ-8SP	Bussmann	J TYPE FUSE, 8A	Copper	Interpolated
LPJ-12SP	Bussmann	J TYPE FUSE, 12A	Copper	Interpolated
LPJ-20SP	Bussmann	J TYPE FUSE, 20A	Copper	Interpolated
LPJ-25SP	Bussmann	J TYPE FUSE, 25A	Copper	Interpolated
LPJ-30SP	Bussmann	J TYPE FUSE, 30A	Copper	Interpolated
LPJ-60SP	Bussmann	J TYPE FUSE, 60A	Copper	Interpolated
LPJ-100SP	Bussmann	J TYPE FUSE, 100A	Copper	Interpolated
LPJ-125SP	Bussmann	J TYPE FUSE, 125A	Copper	Interpolated
LPJ-150SP	Bussmann	J TYPE FUSE, 150A	Copper	Interpolated
LPJ-175SP	Bussmann	J TYPE FUSE, 175A	Copper	Interpolated
LPJ-200SP	Bussmann	J TYPE FUSE, 200A	Copper	UUT2-r,f
TCF6	Bussmann	CUBE FUSE, 6A	Copper	UUT1-r,f
TCF10	Bussmann	CUBE FUSE, 10A	Copper	UUT4-r,f
TCF20	Bussmann	CUBE FUSE, 20A	Copper	Interpolated
TCF25	Bussmann	CUBE FUSE, 25A	Copper	Interpolated
TCF30	Bussmann	CUBE FUSE, 30A	Copper	Interpolated
TCF60	Bussmann	CUBE FUSE, 60A	Copper	Interpolated
TCF100	Bussmann	CUBE FUSE, 100A	Copper	UUT4-r,f
FNQ-R-1	Bussmann	TIME DELAY CPT FUSE, 1A	Copper	UUT1-r,f
FNQ-R-2	Bussmann	TIME DELAY CPT FUSE, 2A	Copper	Interpolated
FNQ-R-4	Bussmann	TIME DELAY CPT FUSE, 4A	Copper	Interpolated
FNQ-R-5	Bussmann	TIME DELAY CPT FUSE, 5A	Copper	UUT2-r,f
FNM-1	Bussmann	TIME DELAY CPT FUSE, 1A	Copper	UUT1-r,f
FNM-2	Bussmann	TIME DELAY CPT FUSE, 2A	Copper	Interpolated
FNM-5	Bussmann	TIME DELAY CPT FUSE, 5A	Copper	Interpolated
FNM-6	Bussmann	TIME DELAY CPT FUSE, 6A	Copper	UUT2-r,f

Special Seismic Certification



Tested Components

Manufacturer: Eaton Corporation

Product Line: Variable Frequency Drives

Tested Product Construction: Galvanized carbon steel and painted carbon steel enclosures, NEMA 1 or 3R

Tested Options: 208-230/480V; drives, disconnects, contactors, overloads, transformers, relays, heaters and fuses

Tested Mounting Description: Rigid and flexible wall mount

Manufacturer	Panel Description	Type	Tested Drive	VFD Frame	Design	Enclosure Material	NEMA Rating	HP	Voltage	Height (in.)	Width (in.)	Depth (in.)	Measured Weight (lb)	Sds (g), z/h=1	Mounting	Unit
Eaton	VFD with Bypass and with Fused and Non-Fused Disconnects (NEMA 1)	HMXE	HMX34AG01221-N	4,5	B1	Galvanized carbon steel	1	7.5	480	23.0	16.0	14.2	61	2.5	Rigid wall mount	UUT 1-r
														2.5	Flexible wall mount	UUT1-f
	VFD without Bypass and with Fused and Non-Fused Disconnects (NEMA 1)	HMXE	HMX32AG4D821-N	4, 5	A1	Galvanized carbon steel	1	1	208	20.5	8.3	10.0	28	2.5	Rigid wall mount	UUT 4-r
														2.5	Flexible wall mount	UUT 4-f
	VFD with Bypass and with Fused and Non-Fused Disconnects (NEMA 3R)	HMXE	HMX32AG17021-N	8	D6	Painted carbon Steel	3R	50	208	50.0	30.0	20.4	460	2.5	Rigid wall mount	UUT 2-r
														2.5	Flexible wall mount	UUT 2-f

Horizon EATON version Catalog Numbering Scheme

Character No.	1	2	3	4	5	6	7	8	9	10	11	12
Description	Product	Product	Product	Product	Full Load Amp	Full Load Amp	Full Load Amp	Enclosure Rating/style	Voltage	Braking Application	Software Series	Disconnect Type

Character **H M X E 0 1 1 A 1 N - F**



Product
HMXE= HVAC drive economical

Amps / Hz

NEC 208, 230 Volts 3-Phase
4D8 = 4.8 Amp (1 Hp)
8D0 = 8.0 Amp (2 Hp)
011 = 11 Amp (3 Hp)
018 = 18 Amp (5 Hp)
025 = 25 Amp (7.5 Hp)
031 = 31 Amp (10 Hp)
048 = 48 Amp (15 Hp)
062 = 62 Amp (20 Hp)
075 = 75 Amp (25 Hp)
088 = 88 Amp (30 Hp)
115 = 115 Amp (40 Hp)
140 = 140 Amp (40 Hp)
150 = 150 Amp (50 Hp)
170 = 170 Amp (40 Hp)

Exception for 230V bypass:
016 = 16 Amp (5 Hp)
024 = 24 Amp (7.5 Hp)
070 = 70 Amp (25 Hp)
115 = 115 Amp (40 Hp)
150 = 150 Amp (50 Hp)

NEC 460 Volts 3-Phase (Max 480V)
3D4 = 3.4 Amp (1 Hp)
4D8 = 4.8 Amp (2 Hp)
5D6 = 5.6 Amp (3 Hp)
9D6 = 9.6 Amp (5 Hp)
012 = 12 Amp (7.5 Hp)
016 = 16 Amp (10 Hp)
023 = 23 Amp (15 Hp)
031 = 31 Amp (20 Hp)
038 = 38 Amp (25 Hp)
046 = 46 Amp (30 Hp)
061 = 61 Amp (40 Hp)
072 = 72 Amp (50 Hp)
087 = 87 Amp (60 Hp)
105 = 105 Amp (75 Hp)
140 = 140 Amp (100 Hp)
170 = 170 Amp (125 Hp)

Exception for 460V bypass:
2D4 = 2.4 Amp (1 Hp)
4D0 = 4.0 Amp (2 Hp)
9D0 = 9.0 Amp (5 Hp)
080 = 80 Amp (60 Hp)

200-240 Volts 3-Phase
2D8 = 2.8 Amp (0.5 Hp)
3D7 = 3.7 Amp (0.75 Hp)
4D8 = 4.8 Amp (1 Hp)
7D0 = 7.0 Amp (1.5 Hp)

NEC 380-480 Volts 3-Phase
1D3 = 1.3 Amp (0.5 Hp)
1D9 = 1.9 Amp (0.75 Hp)
2D4 = 2.4 Amp (1 Hp)
3D3 = 3.3 Amp (1.5 Hp)

Enclosure Style
 3 = NEMA Type 1 Bypass
 A = NEMA Type 1 Disconnect
 4 = NEMA Type 3R Bypass
 B = NEMA Type 3R Disconnect

Voltage
 1 = 208V
 2 = 230V
 4 = 480V

Braking Application
 N = No Brake Chopper

Disconnect Type
 F = Fused
 N = Non-Fused

Software Series
 A-Z

UNIT UNDER TEST - Summary Sheet

UUT1-r,f



Manufacturer: Eaton Corporation

Product Line: Variable Frequency Drives

Model Number: Eaton drive model HMX34AG01221-N

Product Construction Summary: Galvanized carbon steel enclosure, NEMA 1

Options / Subcomponent Summary: 480V , 30A non-fusible disconnect switch, 7A contactor, electric overload, 75W transformer, relay, thermostat and fuses

Unit Mounting Description:

UUT1-r,f were mounted to the DCL shake table interface frame with four 3/8-inch diameter Grade 5 bolts.

Rigid wall mount (UUT1-r): The DCL shake table interface frame was rigidly attached to the shake table.


Flexible wall mount (UUT1-f): The DCL shake table interface frame was flexibly attached to four vibration spring isolators with two 3/4"-dia Grade 5 bolts per isolator.

UUT Properties


UUT1-r,f	Operating Weight (lb)	Dimensions (in)			Lowest Natural Frequency (Hz)		
		Depth	Width	Height	Front-Back	Side-Side	Vertical
	61	16.0	15.6	23.0	N/A	N/A	N/A

Seismic Test Parameters

Building Code	Test Criteria	Sds (g)	z/h	Ip	Aflx-H (g)	Arig-H (g)	Aflx-V (g)	Arig-V (g)
CBC 2019	ICC-ES AC156	2.50	1.0	1.5	4.00	3.00	1.67	0.67

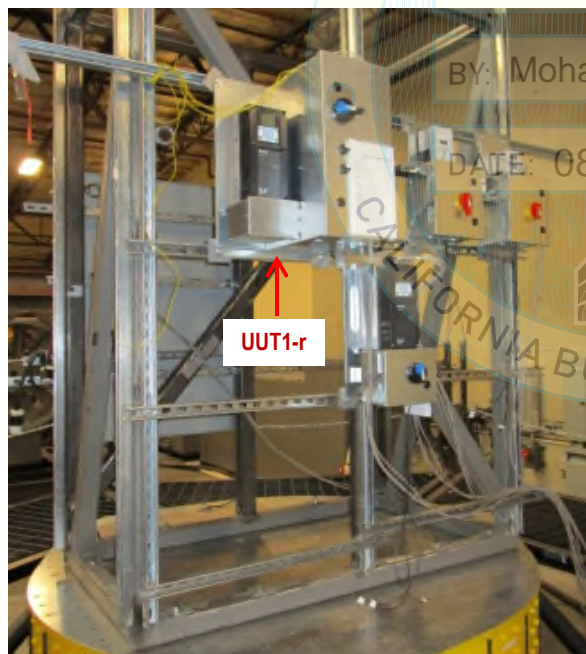

Rigid test setup (UUT1-r)

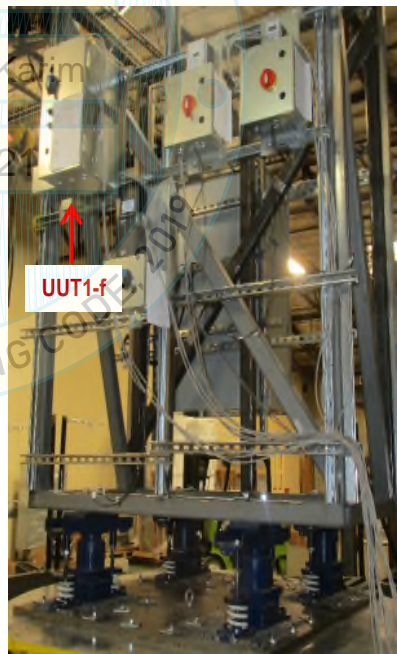

Flexible test setup (UUT1-f)

Note: The UUT was operational before and after shaking and was full of operating content during the tests. The structural integrity of the component and attachment system and force-resisting systems was maintained.

UNIT UNDER TEST - Summary Sheet

UUT2-r,f



Manufacturer: Eaton Corporation

Product Line: Variable Frequency Drives

Model Number: Eaton drive model HMX32AG17021-N

Product Construction Summary: Painted carbon steel enclosure, NEMA 1

Options / Subcomponent Summary: 208-230V , 200A non-fusible disconnect switch, 30A and 200A fusible disconnect switches, 170A contactor, electric overload, 500W transformer, relay, 150W and 400W heaters, and fuses

Unit Mounting Description:
 UUT2-r,f were mounted to the DCL shake table interface frame with four 3/8-inch diameter Grade 5 bolts.
Rigid wall mount (UUT2-r): The DCL shake table interface frame was rigidly attached to the shake table.
Flexible wall mount (UUT2-f): The DCL shake table interface frame was flexibly attached to four vibration spring isolators with two 3/4"-dia Grade 5 bolts per isolator.

UUT Properties

UUT2-r,f	Operating Weight (lb)	Dimensions (in)			Lowest Natural Frequency (Hz)		
		Depth	Width	Height	Front-Back	Side-Side	Vertical
	460	19.5	32.0	50.0	N/A	N/A	N/A

Seismic Test Parameters

Building Code	Test Criteria	Sds (g)	z/h	Ip	Aflx-H (g)	Arig-H (g)	Aflx-V (g)	Arig-V (g)
CBC 2019	ICC-ES AC156	2.50	1.0	1.5	4.00	3.00	1.67	0.67

OSP-0429



Rigid test setup (UUT2-r)



Flexible test setup (UUT2-f)

Note: The UUT was operational before and after shaking and was full of operating content during the tests. The structural integrity of the component and attachment system and force-resisting systems was maintained.

UNIT UNDER TEST - Summary Sheet

UUT4-r,f



Manufacturer: Eaton Corporation

Product Line: Variable Frequency Drives

Model Number: Eaton drive model HMX32AG4D821-N

Product Construction Summary: Galvanized carbon steel enclosure, NEMA 1

Options / Subcomponent Summary: 208V , 30A non-fusible disconnect switch and fuses

Unit Mounting Description:

UUT4-r,f were mounted to the DCL shake table interface frame with four 3/8-inch diameter Grade 5 bolts.

Rigid wall mount (UUT4-r): The DCL shake table interface frame was rigidly attached to the shake table.

Flexible wall mount (UUT4-f): The DCL shake table interface frame was flexibly attached to four vibration spring isolators with two 3/4"-dia Grade 5 bolts per isolator.

UUT Properties

UUT4-r,f	Operating Weight (lb)	Dimensions (in)			Lowest Natural Frequency (Hz)		
		Depth	Width	Height	Front-Back	Side-Side	Vertical
	28	8.6	10.4	20.5	N/A	N/A	N/A

Seismic Test Parameters

Building Code	Test Criteria	Sds (g)	z/h	Ip	Aflx-H (g)	Arig-H (g)	Aflx-V (g)	Arig-V (g)
CBC 2019	ICC-ES AC156	2.50	1.0	1.5	4.00	3.00	1.67	0.67



Rigid test setup (UUT4-r)



Flexible test setup (UUT4-f)

Note: The UUT was operational before and after shaking and was full of operating content during the tests. The structural integrity of the component and attachment system and force-resisting systems was maintained.