


# Saddleback Memorial Medical Center Facility No. 12755

7/10/2025



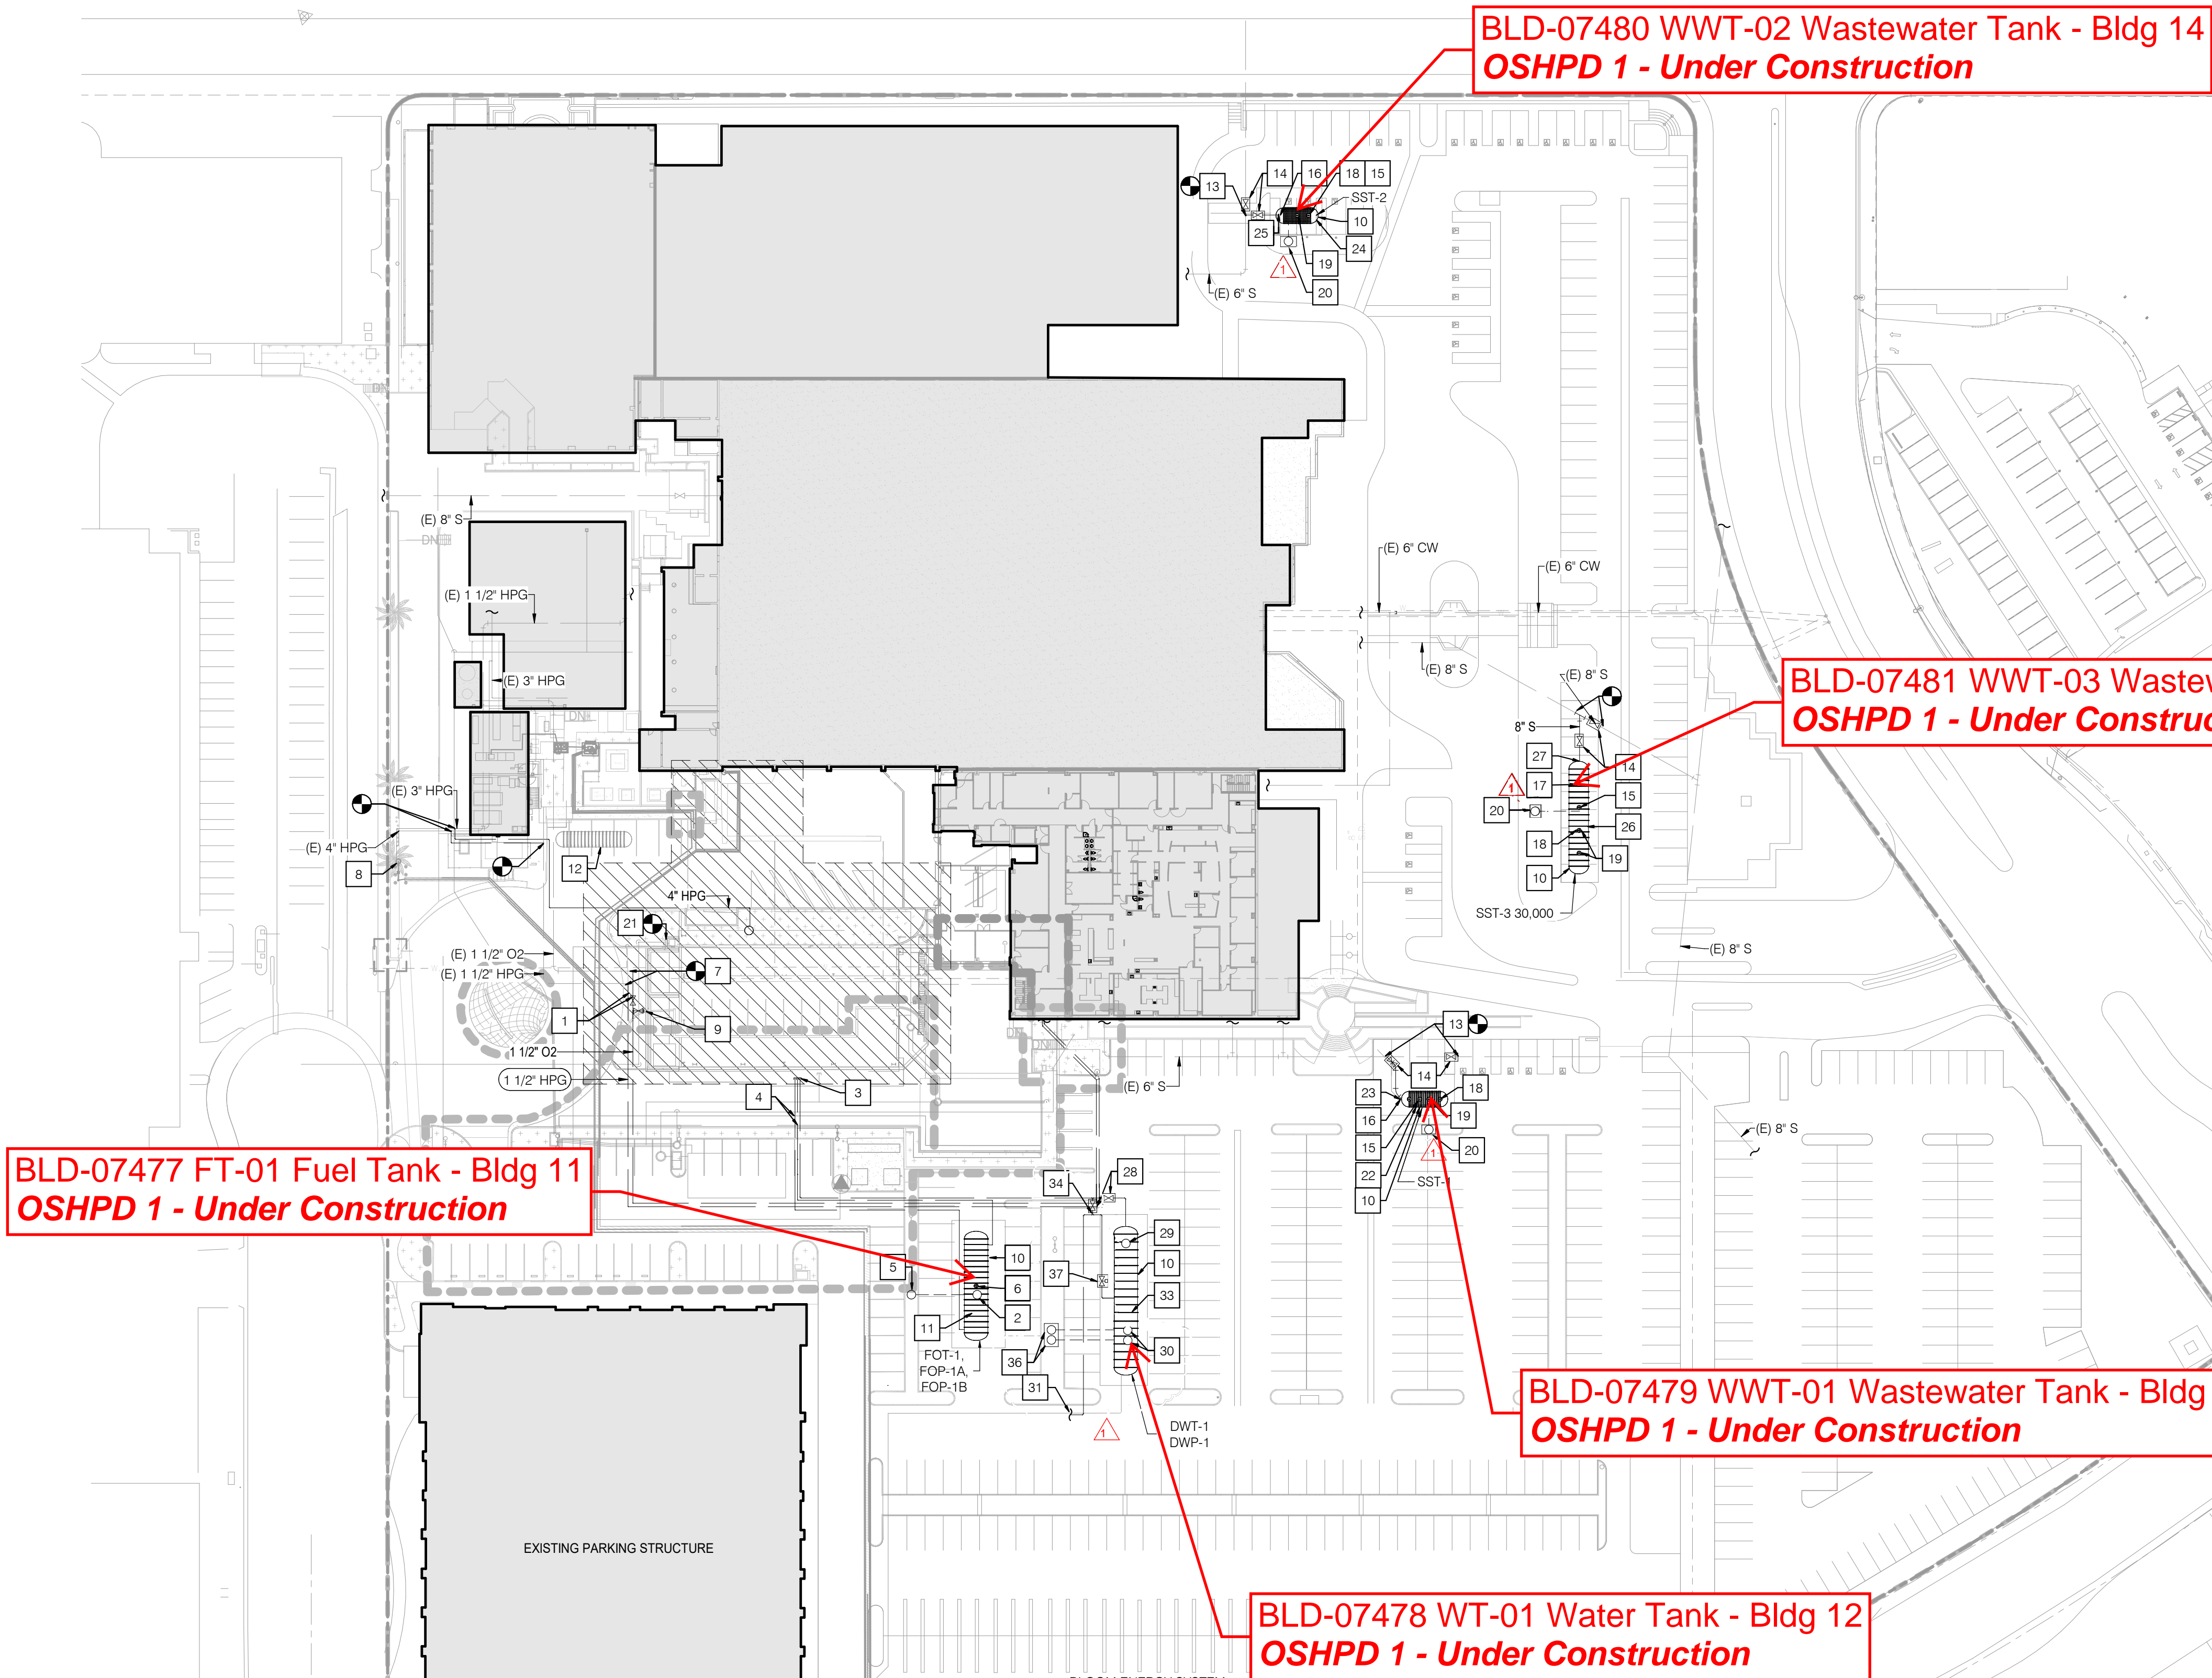

## KEYNOTES

- 1-1/2" MEDICAL OXYGEN AND 1-1/2" HIGH PRESSURED NATURAL GAS TO BE ROUTED AROUND PROPOSED CUP SITE LOCATION. COORDINATE FUTURE CONNECTION WITH SHUTOFF VALVE WITH FLOOR PLANS.
- 36" DIA. MANWAY AND COVER, 36" DIA. CONTAINMENT SUMP AND COVER AND 42" DIA. MANHOLE.
- PROVIDE STUBOUT FOR FUTURE CUP CONNECTION.
- 1-1/2" FOS AND 2" BELOW GRADE.
- 2" FOV RISE TO 12" ABOVE GRADE. PROVIDE WITH FLAME ARRESTORS AND FLAPPER VALVES.
- 2" FUEL OIL TANK FILL.
- P.O.C 1-1/2" O2 AND 1-1/2" HPG TO (E)1-1/2" O2 AND (E)1-1/2" HPG.
- (E)SOGAL GAS METER AND REGULATOR ASSEMBLY.
- PROVIDE STUBOUT WITH FLANGE FOR FUTURE CUP P.O.C.
- REFER TO 1/1P601 FOR TANK DIAGRAMS. REMAIN.
- FOT-1 BURIED DEPTH 15' 0".
- EXISTING UNDERGROUND FUEL STORAGE TANK TO REMAIN.

## SEWER NOTES:

- CONNECT 6" S TO (E) 6" S BELOW GRADE.
- MANUAL GATE VALVE WITH STEM EXTENSION. TERMINATE VALVE HANDLE IN YARD BOX AT GRADE.
- 4" COTG.
- 6" S DROP TO TANK.
- 8" S DROP TO TANK.
- 36" DIA. MANWAY AND COVER, 36" DIA. CONTAINMENT SUMP AND COVER AND 42" DIA. MANHOLE.
- 4" V DROP TO TANK.
- 4" V RISE ABOVE GRADE. PROVIDE GOOSENECK AND TERMINATE 12" ABOVE GRADE. PROVIDE ANTIVANDAL CAGE.
- TO CONNECT TO FUTURE CUP SEWAGE EJECTOR. INVERT ELEVATION IS 337.25 INCHES.
- SST-1 BURIED DEPTH 16.77'.
- SST-1 POINT OF CONNECTION INVERT HEIGHT 333.33.
- SST-2 BURIED DEPTH 16.69'.
- SST-2 POINT OF CONNECTION INVERT HEIGHT 342.6.
- SST-3 BURIED DEPTH 25.52'.
- SST-3 POINT OF CONNECTION INVERT HEIGHT 326.45.

## DOMESTIC WATER NOTES:

- MANUAL GATE VALVE WITH STEM EXTENSION. TERMINATE VALVE HANDLE IN YARD BOX AT GRADE.
- 36" DIA. MANWAY AND COVER, 36" DIA. CONTAINMENT SUMP AND COVER AND 42" DIA. MANHOLE.
- 4" V DROP TO TANK.
- REFER TO C601 FOR CONTINUATION.
- CAP EXISTING 6" CW.
- DWT-1 BURIED DEPTH 13' 0".
- 6" CW BYPASS.
- 6" CW POC TO WATER METERS. FOR CONTINUATION SEE C601.
- TWO 4" VENT PIPING FROM TANK. ROUTING IS DIAGRAMMATIC. PROVIDE DOWNWARD GOOSENECK AND TERMINATE 12" ABOVE GRADE. PROVIDE ANTIVANDAL CAGE.
- FILL VALVE. TERMINATE VALVE HANDLE IN YARD BOX.

## LEGEND

NOT IN SCOPE


## REVISIONS

	ASD 0	08/23/2024
1	BCK 0	09/13/2024
7	BCK 2	02/21/2025

AGENCY NO. H240874-30-00



DPOR SEAL / MILESTONE

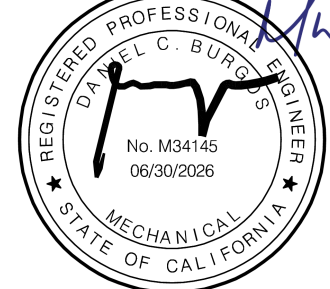

PROJECT NO.	B1612.01
DRAWN	JP
REVIEWED	CB
SCALE	As indicated

SITE PLAN