



**DEPARTMENT OF HEALTH CARE ACCESS AND INFORMATION
FACILITIES DEVELOPMENT DIVISION**

**APPLICATION FOR HCAI SPECIAL SEISMIC
CERTIFICATION PREAPPROVAL (OSP)**

OFFICE USE ONLY

APPLICATION #: OSP-0575

HCAI Special Seismic Certification Preapproval (OSP)

Type: New Renewal

Manufacturer Information

Manufacturer: ABB

Manufacturer's Technical Representative: Louis Hill

Mailing Address: PO Box 372, Milwaukee, WI 53201-0372

Telephone: (262) 785-3403

Email: louis.r.hill@us.abb.com

Product Information

Product Name: Industrial Control Panels

Product Type: Variable Frequency Drives and Starters

Product Model Number: ACS580, ACH580, ACQ580, AYK580, ACS880, ACS180, ACH180

General Description: Variable Frequency Drives that can control an AC motor with either VFD or Bypass.

Mounting Description: Rigid Base Mounting (Floor Mounted Enclosed Units), Combination Rigid base and wall mounted, Rigid and Isolated Wall Mounting (Wall-Mounted Enclosed Units and Drive Subcomponents)

Tested Seismic Enhancements: Seismic enhancements made to the test units and/or modifications required to address anomalies during the tests shall be incorporated into the production units.

Applicant Information

Applicant Company Name: The VMC Group

Contact Person: John Giuliano

Mailing Address: Main Street, Bloomingdale, NJ 07403

Telephone: (973) 838-1780

Email: john.giuliano@thvmcgroup.com

Title: President





**DEPARTMENT OF HEALTH CARE ACCESS AND INFORMATION
FACILITIES DEVELOPMENT DIVISION**

California Licensed Structural Engineer Responsible for the Engineering and Test Report(s)

Company Name: THE VMC GROUP

Name: Kenneth Tarlow California License Number: S2851

Mailing Address: 980 9th Street, 16th Floor, Sacramento, CA 95814

Telephone: (832) 627-2214 Email: ken.tarlow@thevmcgroup.com

Certification Method

GR-63-Core ICC-ES AC156 IEEE 344 IEEE 693 NEBS 3

Other (Please Specify): _____


Testing Laboratory

Company Name: DYNAMIC CERTIFICATION LABORATORY (DCL)

Contact Person: Kelly Laplace


Mailing Address: 1315 Greg St., Ste 109, Sparks NV 89431

Telephone: (775) 358-5085 Email: kelly@shaketest.com

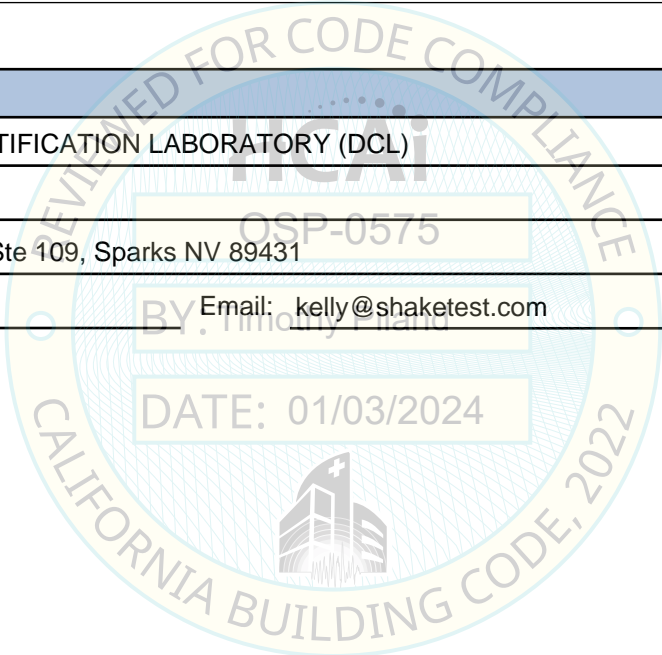

"A healthier California where all receive equitable, affordable, and quality health care"

STATE OF CALIFORNIA – HEALTH AND HUMAN SERVICES AGENCY

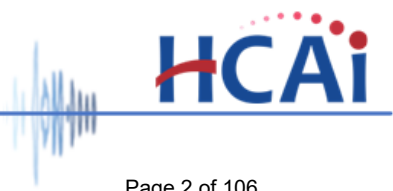



**DEPARTMENT OF HEALTH CARE ACCESS AND INFORMATION
FACILITIES DEVELOPMENT DIVISION**

Seismic Parameters

Design Basis of Equipment or Components (F_p/W_p) =	[Rigid base, base and wall, or wall mounted] 1.5 (z/h=1.0), 1.13 (z/h=0.0); [Isolated wall mounted] 4.5 (z/h=1.0), 1.88 (z/h=0.0)
SDS (Design spectral response acceleration at short period, g) =	2.0 (z/h=1.0) & 2.5 (z/h=0.0)
a_p (Amplification factor) =	2.5
R_p (Response modification factor) =	6.0 (Rigid); 2.0 (Isolated)
Ω_0 (System overstrength factor) =	2.0
I_p (Importance factor) =	1.5
z/h (Height ratio factor) =	1 and 0
Natural frequencies (Hz) =	See Attachment
Overall dimensions and weight =	See Attachment

HCAI Approval (For Office Use Only) - Approval Expires on 01/03/2030			
Date:	1/3/2024		
Name:	Timothy Piland	BY: Timothy Piland	Title: Senior Structural Engineer
Special Seismic Certification Valid Up to:	SDS (g) = See Above	z/h =	See Above
Condition of Approval (if applicable):	DATE: 01/03/2024		

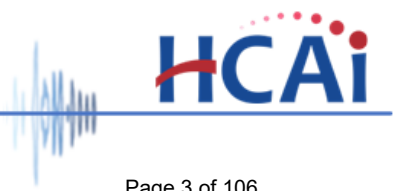
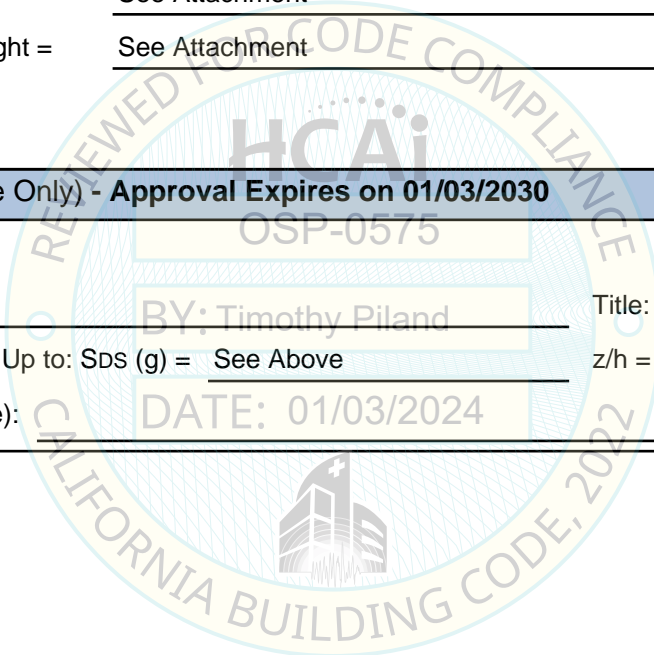


Table 1 - Certified Products - Panel Mounted Drives With Wall Mounted Enclosure

System Voltage [V]	Model	Construction	ABB Model Number	Base Drive Frame Size	Enclosure Details					Back Frame Material	Back Frame Material Thickness [mm]	Front Cover Material	Front Cover Material Thickness [mm]	Type 1, Type 12 Max Weight [lb]	UUT
					Frame Size	NEMA Rating	Height [in]	Width [in]	Depth [in]						
200-240	For ACx580: x = S, H, or Q	For zxR: z = B, P, or 0 x = C, D, or P R may be omitted	ACx580-zxR-04A6-2	R1	P1	1, 12	26.5	6.5	12.4	Carbon Steel	1.6	Plastic	7.0	18.1	Extrapolated
			ACx580-zxR-06A6-2	R1	P1	1, 12	26.5	6.5	12.4		1.6	Plastic	7.0	18.1	Extrapolated
			ACx580-zxR-07A5-2	R1	P1	1, 12	26.5	6.5	12.4		1.6	Plastic	7.0	18.1	Extrapolated
			ACx580-zxR-10A6-2	R1	P1	1, 12	26.5	6.5	12.4		1.6	Plastic	7.0	18.1	Extrapolated
			ACx580-zxR-017A-2	R1	P1	1, 12	26.5	6.5	12.4		1.6	Plastic	7.0	18.1	Extrapolated
440-480	For ACx580: x = S, H, or Q	For zxR: z = B, P, or 0 x = C, D, or P R may be omitted	ACx580-zxR-02A1-4	R1	P1	1, 12	26.5	6.5	12.4		1.6	Plastic	7.0	18.1	Extrapolated
			ACx580-zxR-03A0-4	R1	P1	1, 12	26.5	6.5	12.4		1.6	Plastic	7.0	18.1	Extrapolated
			ACx580-zxR-03A5-4	R1	P1	1, 12	26.5	6.5	12.4		1.6	Plastic	7.0	18.1	Extrapolated
			ACx580-zxR-04A8-4	R1	P1	1, 12	26.5	6.5	12.4		1.6	Plastic	7.0	18.1	Extrapolated
			ACx580-zxR-07A6-4	R1	P1	1, 12	26.5	6.5	12.4		1.6	Plastic	7.0	18.1	Extrapolated
200-240	For ACx580: x = S, H, or Q	For zxR: z = B, P, or 0 x = C, D, or P R may be omitted	ACx580-zxR-024A-2	R2	P2	1, 12	30.2	6.5	12.7		1.6	Plastic	7.0	22	Extrapolated
			ACx580-zxR-031A-2	R2	P2	1, 12	30.2	6.5	12.7		1.6	Plastic	7.0	22	Extrapolated
440-480	For ACx580: x = S, H, or Q	For zxR: z = B, P, or 0 x = C, D, or P R may be omitted	ACx580-zxR-014A-4	R2	P2	1, 12	30.2	6.5	12.7		1.6	Plastic	7.0	22	Extrapolated
			ACx580-zxR-023A-4	R2	P2	1, 12	30.2	6.5	12.7		1.6	Plastic	7.0	22	Extrapolated
575-600	For ACx580: x = S, H, or Q	For zxR: z = B, P, or 0 x = C, D, or P R may be omitted	ACx580-zxR-02A7-6	R2	P2	1, 12	30.2	6.5	12.7		1.6	Plastic	7.0	22	Extrapolated
			ACx580-zxR-03A9-6	R2	P2	1, 12	30.2	6.5	12.7		1.6	Plastic	7.0	22	Extrapolated
			ACx580-zxR-06A1-6	R2	P2	1, 12	30.2	6.5	12.7		1.6	Plastic	7.0	22	Extrapolated
			ACx580-zxR-09A0-6	R2	P2	1, 12	30.2	6.5	12.7		1.6	Plastic	7.0	22	Extrapolated
			ACx580-zxR-011A-6	R2	P2	1, 12	30.2	6.5	12.7		1.6	Plastic	7.0	22	Extrapolated
200-240	For ACx580: x = S, H, or Q	For zxR: z = B, P, or 0 x = C, D, or P R may be omitted	ACx580-zxR-046A-2	R3	P3	1, 12	36.5	8.4	13.2		1.6	Plastic	10.2	39	Extrapolated
			ACx580-zxR-059A-2	R3	P3	1, 12	36.5	8.4	13.2	1.6	Plastic	10.2	39	Extrapolated	
440-480	For ACx580: x = S, H, or Q	For zxR: z = B, P, or 0 x = C, D, or P R may be omitted	ACx580-zxR-027A-4	R3	P3	1, 12	36.5	8.4	13.2	1.6	Plastic	10.2	39	Extrapolated	
			ACx580-zxR-034A-4	R3	P3	1, 12	36.5	8.4	13.2	1.6	Plastic	10.2	39	Extrapolated	
			ACx580-zxR-044A-4	R3	P3	1, 12	36.5	8.4	13.2	1.6	Plastic	10.2	39	Extrapolated	
			ACH580-PCR-044A-4	R3	P3	1, 12	34.0	8.0	12.0	1.6	Plastic	10.2	39	UUT-07	
575-600	For ACx580: x = S, H, or Q	For zxR: z = B, P, or 0 x = C, D, or P R may be omitted	ACx580-zxR-022A-6	R3	P3	1, 12	36.5	8.4	13.2	1.6	Plastic	10.2	39	Interpolated	
			ACx580-zxR-027A-6	R3	P3	1, 12	36.5	8.4	13.2	1.6	Plastic	10.2	39	Interpolated	
			ACx580-zxR-032A-6	R3	P3	1, 12	36.5	8.4	13.2	1.6	Plastic	10.2	39	Interpolated	
200-240	For ACx580: x = S, H, or Q	For zxR: z = B, P, or 0 x = C, D, or P R may be omitted	ACx580-zxR-075A-2	R4	P4	1, 12	42.6	8.4	14.3	1.6	Carbon Steel	2.0	60	Interpolated	
440-480	For ACx580: x = S, H, or Q	For zxR: z = B, P, or 0 x = C, D, or P R may be omitted	ACx580-zxR-052A-4	R4	P4	1, 12	42.6	8.4	14.3	1.6	Carbon Steel	2.0	60	Interpolated	
			ACx580-zxR-077A-4	R4	P4	1, 12	42.6	8.4	14.3	1.6	Carbon Steel	2.0	60	Interpolated	
			ACx580-zxR-065A-4	R4	P4	1, 12	42.6	8.4	14.3	1.6	Carbon Steel	2.0	59	Interpolated	
			ACH580-PCR-065A-4	R4	P4	1, 12	39.0	8.0	13.0	1.6	Carbon Steel	2.0	59	UUT-08	
575-600	For ACx580: x = S, H, or Q	For zxR: z = B, P, or 0 x = C, D, or P R may be omitted	ACH580-zxR-041A-6	R5	P5	1	56.8	8.5	13.3	1.8	NA	NA	116	Interpolated ^[4]	
			ACH580-zxR-052A-6	R5	P5	1	56.8	8.5	13.3	1.8	NA	NA	116	Interpolated ^[4]	
			ACH580-zxR-062A-6	R5	P5	1	56.8	8.5	13.3	1.8	NA	NA	116	Interpolated ^[4]	
			ACH580-zxR-077A-6	R5	P5	1	56.8	8.5	13.3	1.8	NA	NA	116	Interpolated ^[4]	

- Notes:
1. ABB is the manufacturer for all units.
 2. All units are wall mounted.
 3. S, H, Q in models are identical product with different industry use.
 4. All units were tested in rigid and isolated mounting configurations to S_{DS}=2.0 at z/h=1.0, and S_{DS}=2.5 at z/h=0.0.
 5. P5 units are depopulated versions of V5 units and are interpolated by testing of UUT-21
 6. PDR/VDR/BDR models use disconnects which weigh less than tested PCR/VCR/BCR models with circuit breakers.

Table 1 - Certified Products - Panel Mounted Drives With Wall Mounted Enclosure (Cont.)

System Voltage [V]	Model	Construction	ABB Model Number	Base Drive Frame Size	Enclosure Details						Max Weight [lb]	UUT	
					Frame Size	NEMA Rating	Height [in]	Width [in]	Depth [in]	Thickness [mm]			
200-240	ACH580	Where x = C or D	ACH580-VxR-04A6-2	R1	V1	1	40.2	5.4	10.6	1.6	30	Extrapolated	
			ACH580-VxR-06A6-2	R1	V1	1	40.2	5.4	10.6	1.6	30	Extrapolated	
			ACH580-VxR-07A5-2	R1	V1	1	40.2	5.4	10.6	1.6	30	Extrapolated	
			ACH580-VxR-10A6-2	R1	V1	1	40.2	5.4	10.6	1.6	30	Extrapolated	
			ACH580-VxR-017A-2	R1	V1	1	40.2	5.4	10.6	1.6	30	Extrapolated	
440-480	ACH580	Where x = C or D	ACH580-VxR-02A1-4	R1	V1	1	40.2	5.4	10.6	1.6	30	Extrapolated	
			ACH580-VxR-03A0-4	R1	V1	1	40.2	5.4	10.6	1.6	30	Extrapolated	
			ACH580-VxR-03A5-4	R1	V1	1	40.2	5.4	10.6	1.6	30	Extrapolated	
			ACH580-VxR-04A8-4	R1	V1	1	40.2	5.4	10.6	1.6	30	Extrapolated	
			ACH580-VxR-07A6-4	R1	V1	1	40.2	5.4	10.6	1.6	30	Extrapolated	
			ACH580-VxR-012A-4	R1	V1	1	40.2	5.4	10.6	1.6	30	Extrapolated	
			ACH580-VCR-012A-4	R1	V1	1	40.0	5.0	9.0	1.6	30	UUT-05	
200-240	ACH580	Where x = C or D	ACH580-VxR-024A-2	R2	V2	1	44.1	5.4	10.8	1.6	50.8	Interpolated	
440-480	ACH580	Where x = C or D	ACH580-VxR-014A-4	R2	V2	1	44.1	5.4	10.8	1.6	50.8	Interpolated	
			ACH580-VxR-023A-4	R2	V2	1	44.1	5.4	10.8	1.6	50.8	Interpolated	
575-600	ACH580	Where x = C or D	ACH580-VxR-02A7-6	R2	V2	1	44.1	5.4	10.8	1.6	50.8	Interpolated	
			ACH580-VxR-03A9-6	R2	V2	1	44.1	5.4	10.8	1.6	50.8	Interpolated	
			ACH580-VxR-06A1-6	R2	V2	1	44.1	5.4	10.8	1.6	50.8	Interpolated	
			ACH580-VxR-09A0-6	R2	V2	1	44.1	5.4	10.8	1.6	50.8	Interpolated	
			ACH580-VxR-011A-6	R2	V2	1	44.1	5.4	10.8	1.6	50.8	Interpolated	
200-240	ACH580	Where x = C or D	ACH580-VxR-017A-6	R2	V2	1	44.1	5.4	10.8	1.6	50.8	Interpolated	
440-480	ACH580	Where x = C or D	ACH580-VxR-031A-2	R2	V3	1	47.7	8.5	10.9	1.6	59.6	Interpolated	
			ACH580-VxR-027A-4	R3	V3	1	47.7	8.5	10.9	1.6	59.6	Interpolated	
			ACH580-VxR-034A-4	R3	V3	1	47.7	8.5	10.9	1.6	59.6	Interpolated	
575-600	ACH580	Where x = C or D	ACH580-VxR-044A-4	R3	V3	1	47.7	8.5	10.9	1.6	59.6	Interpolated	
			ACH580-VxR-022A-6	R3	V3	1	47.7	8.5	10.9	1.6	59.6	Interpolated	
			ACH580-VxR-027A-6	R3	V3	1	47.7	8.5	10.9	1.6	59.6	Interpolated	
200-240	ACH580	Where x = C or D	ACH580-VxR-032A-6	R3	V3	1	47.7	8.5	10.9	1.6	59.6	Interpolated	
			ACH580-VxR-046A-2	R3	V4	1	56.8	8.5	12.0	1.6	86	Interpolated	
			ACH580-VxR-059A-2	R3	V4	1	56.8	8.5	12.0	1.6	86	Interpolated	
440-480	ACH580	Where x = C or D	ACH580-VxR-075A-2	R4	V4	1	56.8	8.5	12.0	1.6	86	Interpolated	
			ACH580-VxR-052A-4	R4	V4	1	56.8	8.5	12.0	1.6	86	Interpolated	
			ACH580-VxR-077A-4	R4	V4	1	56.8	8.5	12.0	1.6	86	Interpolated	
575-600	ACH580	Where x = C or D	ACH580-VxR-065A-4	R4	V4	1	56.8	8.5	12.0	1.6	86	Interpolated	
			ACH580-VCR-065A-4	R4	V4	1	56.0	8.0	10.0	1.6	86	UUT-06	
			For zXR: z = V, B, P, or O x = C, D, or P R may be omitted	ACx580-zXR-041A-6	R5	V5	1	56.8	8.5	13.3	1.8	116	Interpolated
			ACx580-zXR-052A-6	R5	V5	1	56.8	8.5	13.3	1.8	116	Interpolated	
575-600	ACH580	-	ACx580-zXR-062A-6	R5	V5	1	56.8	8.5	13.3	1.8	116	Interpolated	
			ACH580-VCR-077A-6	R5	V5	1	56.0	8.0	12.0	1.8	116	UUT-21	
208/240	ACS880	For PxR: x = C or D	ACS880-PxR-087A-2	R5	PxB3R-3	3R	39.4	30.0	15.9	1.52	235	Extrapolated	
			ACS880-PxR-115A-2	R5	PxB3R-3	3R	39.4	30.0	15.9	1.52	235	Extrapolated	
208/240	For ACx580: x = S, H, or Q	For PxR: x = C or D	ACx580-PxR-088A-2	R5	PxB3R-3	3R	39.4	30.0	15.9	1.52	235	Extrapolated	
440-480	For ACx580: x = S, H, or Q	For PxR: x = C or D	ACx580-PxR-114A-2	R5	PxB3R-3	3R	39.4	30.0	15.9	1.52	235	Extrapolated	
			ACx580-PxR-096A-4	R5	PxB3R-3	3R	39.4	30.0	15.9	1.52	235	Extrapolated	
208/240	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-088A-2	R5	Bx3R-3	3R	39.4	30.0	15.9	1.52	235	Extrapolated	
			ACx580-BxR-114A-2	R5	Bx3R-3	3R	39.4	30.0	15.9	1.52	235	Extrapolated	
440-480	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-096A-4	R5	Bx3R-3	3R	39.4	30.0	15.9	1.52	235	Extrapolated	
440-480	For ACx580: x = S, H, or Q	-	ACH580-BCR-096A-4	R5	BX1-4	1	62.0	19.5	19.0	1.52	243	UUT-16	
208/240	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-088A-2	R5	BX1-4	1	61.9	19.3	19.0	1.52	275	Interpolated	
			ACx580-BxR-114A-2	R5	BX1-4	1	61.9	19.3	19.0	1.52	275	Interpolated	
208/240	ACS880	For PxR: x = C or D	ACS880-PxR-087A-2	R5	PXB1-4	1	61.9	19.3	19.0	1.52	335	Interpolated	
			ACS880-PxR-115A-2	R5	PXB1-4	1	61.9	19.3	19.0	1.52	335	Interpolated	
			ACS880-PxR-145A-2	R6	PXB1-4	1	61.9	19.3	19.0	1.52	335	Interpolated	
			ACS880-PxR-170A-2	R7	PXB1-4	1	61.9	19.3	19.0	1.52	335	Interpolated	
			ACS880-PxR-206A-2	R7	PXB1-4	1	61.9	19.3	19.0	1.52	335	Interpolated	
208/240	For ACx580: x = S, H, or Q	For PxR: x = C or D	ACx580-PxR-088A-2	R5	PXB1-4	1	61.9	19.3	19.0	1.52	335	Interpolated	
			ACx580-PxR-114A-2	R5	PXB1-4	1	61.9	19.3	19.0	1.52	335	Interpolated	
			ACx580-PxR-143A-2	R6	PXB1-4	1	61.9	19.3	19.0	1.52	335	Interpolated	
			ACx580-PxR-169A-2	R7	PXB1-4	1	61.9	19.3	19.0	1.52	335	Interpolated	
			ACx580-PxR-211A-2	R7	PXB1-4	1	61.9	19.3	19.0	1.52	335	Interpolated	
440-480	ACS880	For PxR: x = C or D	ACS880-PxR-096A-4	R6	PXB1-4	1	61.9	19.3	19.0	1.52	335	Interpolated	
			ACS880-PxR-124A-4	R6	PXB1-4	1	61.9	19.3	19.0	1.52	335	Interpolated	
			ACS880-PxR-156A-4	R7	PXB1-4	1	61.9	19.3	19.0	1.52	335	Interpolated	
			ACS880-PxR-180A-4	R7	PXB1-4	1	61.9	19.3	19.0	1.52	335	Interpolated	
440-480	For ACx580: x = S, H, or Q	For PxR: x = C or D	ACx580-PxR-096A-4	R5	PXB1-4	1	61.9	19.3	19.0	1.52	335	Interpolated	
			ACx580-PxR-124A-4	R6	PXB1-4	1	61.9	19.3	19.0	1.52	335	Interpolated	
			ACx580-PxR-156A-4	R7	PXB1-4	1	61.9	19.3	19.0	1.52	335	Interpolated	
			ACx580-PxR-180A-4	R7	PXB1-4	1	61.9	19.3	19.0	1.52	335	Interpolated	
208/240	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-088A-2	R5	BX12-4	12	48.0	36.0	21.0	1.52	432	Interpolated	
			ACx580-BxR-114A-2	R5	BX12-4	12	48.0	36.0	21.0	1.52	432	Interpolated	
			ACx580-BxR-143A-2	R6	BX12-4	12	48.0	36.0	21.0	1.52	432	Interpolated	
			ACx580-BxR-169A-2	R7	BX12-4	12	48.0	36.0	21.0	1.52	432	Interpolated	
440-480	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-096A-4	R5	BX12-4	12	48.0	36.0	21.0	1.52	432	Interpolated	
			ACx580-BxR-124A-4	R6	BX12-4	12	48.0	36.0	21.0	1.52	432	Interpolated	
			ACx580-BxR-156A-4	R7	BX12-4	12	48.0	36.0	21.0	1.52	432	Interpolated	
			ACx580-BxR-180A-4	R7	BX12-4	12	48.0	36.0	21.0	1.52	432	Interpolated	

Notes: 1. ABB is the manufacturer for all units. 2. All units are wall mounted. 3. All units were tested in rigid and isolated mounting configurations to SDS=2.0 at z/h=1.0, and SDS=2.5 at z/h=0.0. 4. PDR/VDR/BDR models use disconnects which weigh less than tested PCR/VCR/BCR models with circuit breakers. 5. All Cabinets Carbon Steel. 3R Cabinets are Galvanized for weatherproofing. 6. S, H, Q in models are identical product with different industry use.

Table 1 - Certified Products - Panel Mounted Drives With Wall Mounted Enclosure (Cont.)

System Voltage [V]	Model	Construction	ABB Model Number	Base Drive Frame Size	Enclosure Details					Thickness [mm]	Max Weight [lb]	UUT
					Frame Size	NEMA Rating	Height [in]	Width [in]	Depth [in]			
208/240	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-143A-2	R6	BX1-5	1	73.4	34.8	20.4	1.9	443	Interpolated
			ACx580-BxR-169A-2	R7	BX1-5	1	73.4	34.8	20.4	1.9	443	Interpolated
			ACx580-BxR-211A-2	R7	BX1-5	1	73.4	34.8	20.4	1.9	443	Interpolated
			ACx580-BxR-273A-2	R8	BX1-5	1	73.4	34.8	20.4	1.9	443	Interpolated
440-480	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-124A-4	R6	BX1-5	1	73.4	34.8	20.4	1.9	443	Interpolated
			ACx580-BxR-156A-4	R7	BX1-5	1	73.4	34.8	20.4	1.9	443	Interpolated
			ACx580-BxR-180A-4	R7	BX1-5	1	73.4	34.8	20.4	1.9	443	Interpolated
208/240	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-088A-2	R5	Bx3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
			ACx580-BxR-114A-2	R5	Bx3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
			ACx580-BxR-143A-2	R6	Bx3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
			ACx580-BxR-169A-2	R7	Bx3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
440-480	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-096A-4	R5	Bx3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
			ACx580-BxR-124A-4	R6	Bx3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
			ACx580-BxR-156A-4	R7	Bx3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
			ACx580-BxR-180A-4	R7	Bx3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
208/240	ACS880	For PxR: x = C or D	ACS880-PxR-087A-2	R5	PXB12-5	12	48.0	36.0	21.0	1.52	443	Interpolated
			ACS880-PxR-115A-2	R5	PXB12-5	12	48.0	36.0	21.0	1.52	443	Interpolated
			ACS880-PxR-145A-2	R6	PXB12-5	12	48.0	36.0	21.0	1.52	443	Interpolated
			ACS880-PxR-170A-2	R7	PXB12-5	12	48.0	36.0	21.0	1.52	443	Interpolated
			ACS880-PxR-206A-2	R7	PXB12-5	12	48.0	36.0	21.0	1.52	443	Interpolated
208/240	For ACx580: x = S, H, or Q	For PxR: x = C or D	ACx580-PxR-088A-2	R5	PXB12-5	12	48.0	36.0	21.0	1.52	443	Interpolated
			ACx580-PxR-114A-2	R5	PXB12-5	12	48.0	36.0	21.0	1.52	443	Interpolated
			ACx580-PxR-143A-2	R6	PXB12-5	12	48.0	36.0	21.0	1.52	443	Interpolated
			ACx580-PxR-169A-2	R7	PXB12-5	12	48.0	36.0	21.0	1.52	443	Interpolated
			ACx580-PxR-211A-2	R7	PXB12-5	12	48.0	36.0	21.0	1.52	443	Interpolated
440-480	ACS880	For PxR: x = C or D	ACS880-PxR-096A-4	R6	PXB12-5	12	48.0	36.0	21.0	1.52	443	Interpolated
			ACS880-PxR-124A-4	R6	PXB12-5	12	48.0	36.0	21.0	1.52	443	Interpolated
			ACS880-PxR-156A-4	R7	PXB12-5	12	48.0	36.0	21.0	1.52	443	Interpolated
			ACS880-PxR-180A-4	R7	PXB12-5	12	48.0	36.0	21.0	1.52	443	Interpolated
			ACS880-PxR-240A-4	R8	PXB12-5	12	48.0	36.0	21.0	1.52	443	Interpolated
440-480	For ACx580: x = S, H, or Q	For PxR: x = C or D	ACx580-PxR-096A-4	R5	PXB12-5	12	48.0	36.0	21.0	1.52	443	Interpolated
			ACx580-PxR-124A-4	R6	PXB12-5	12	48.0	36.0	21.0	1.52	443	Interpolated
			ACx580-PxR-156A-4	R7	PXB12-5	12	48.0	36.0	21.0	1.52	443	Interpolated
			ACx580-PxR-180A-4	R7	PXB12-5	12	48.0	36.0	21.0	1.52	443	Interpolated
208/240	ACS880	For PxR: x = C or D	ACS880-PxR-145A-2	R6	PxB3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
			ACS880-PxR-170A-2	R7	PxB3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
			ACS880-PxR-206A-2	R7	PxB3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
			ACS880-PxR-274A-2	R8	PxB3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
208/240	For ACx580: x = S, H, or Q	For PxR: x = C or D	ACx580-PxR-143A-2	R6	PxB3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
			ACx580-PxR-169A-2	R7	PxB3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
			ACx580-PxR-211A-2	R7	PxB3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
			ACx580-PxR-273A-2	R8	PxB3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
440-480	ACS880	For PxR: x = C or D	ACS880-PxR-096A-4	R6	PxB3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
			ACS880-PxR-124A-4	R6	PxB3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
			ACS880-PxR-156A-4	R7	PxB3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
			ACS880-PxR-180A-4	R7	PxB3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
			ACS880-PxR-240A-4	R8	PxB3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
440-480	For ACx580: x = S, H, or Q	For PxR: x = C or D	ACx580-PxR-124A-4	R6	PxB3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
			ACx580-PxR-156A-4	R7	PxB3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
			ACx580-PxR-180A-4	R7	PxB3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
			ACx580-PxR-240A-4	R8	PxB3R-4	3R	51.0	36.0	20.4	1.52	443	Interpolated
208/240	ACS880	For PxR: x = C or D	ACS880-PxR-274A-2	R8	PXB1-5	1	62.5	35.0	20.5	1.9	443	Interpolated
208/240	For ACx580: x = S, H, or Q	-	ACH580-PCR-273A-2	R8	PXB1-5	1	62.5	35.0	20.5	1.9	443	UUT-18
440-480	ACS880	For PxR: x = C or D	ACS880-PxR-240A-4	R8	PXB1-5	1	62.5	35.0	20.5	1.9	443	Interpolated
			ACS880-PxR-260A-4	R8	PXB1-5	1	62.5	35.0	20.5	1.9	443	Interpolated
440-480	For ACx580: x = S, H, or Q	For PxR: x = C or D	ACx580-PxR-240A-4	R8	PXB1-5	1	62.5	35.0	20.5	1.9	443	Interpolated

- Notes:
1. ABB is the manufacturer for all units.
 2. All units are wall mounted.
 3. All units were tested in rigid and isolated mounting configurations to SDS=2.0 at z/h=1.0, and SDS=2.5 at z/h=0.0.
 4. PDR/VDR/BDR models use disconnects which weigh less than tested PCR/VCR/BCR models with circuit breakers.
 5. All Cabinets Carbon Steel. 3R Cabinets are Galvanized for weatherproofing
 6. S, H, Q in models are identical product with different industry use.

Table 1 - Certified Products - Panel Mounted Drives With Wall Mounted Enclosure (Cont.)

System Voltage [V]	Model	Construction	ABB Model Number	Base Drive Frame Size	Enclosure Details					Thickness [mm]	Max Weight [lb]	UUT
					Frame Size	NEMA Rating	Height [in]	Width [in]	Depth [in]			
440-480	For ACx580: x = H, or Q	For BxR: x = C or D	ACx580-3BxR-07A6-4	R3	Bx1-31	Type 1	49.5	17.0	18.0	2	138.2	UUT-22A,B
			ACx580-3BxR-012A-4	R3	Bx1-31	Type 1	50.0	16.3	17.8	2	150	Interpolated
			ACx580-3BxR-014A-4	R3	Bx1-31	Type 1	50.0	16.3	17.8	2	150	Interpolated
			ACx580-3BxR-023A-4	R3	Bx1-31	Type 1	50.0	16.3	17.8	2	150	Interpolated
			ACx580-3BxR-027A-4	R6	Bx1-32	Type 1	61.9	19.3	19.0	1.6	225	Interpolated
			ACx580-3BxR-034A-4	R6	Bx1-32	Type 1	61.9	19.3	19.0	1.6	225	Interpolated
			ACx580-3BxR-044A-4	R6	Bx1-32	Type 1	61.9	19.3	19.0	1.6	225	Interpolated
			ACx580-3BxR-052A-4	R6	Bx1-32	Type 1	61.9	19.3	19.0	1.6	225	Interpolated
			ACx580-3BxR-065A-4	R6	Bx1-32	Type 1	61.9	19.3	19.0	1.6	225	Interpolated
		ACx580-3BxR-077A-4	R6	Bx1-32	Type 1	62.0	19.5	19.3	1.6	272.8	UUT-23A,B	
		ACx580-3PxR-07A6-4	R3	PxB1-31	Type 1	37.8	9.0	18.0	2	68.4	UUT-25A,B	
		ACx580-3PxR-012A-4	R3	PxB1-31	Type 1	38.0	8.0	17.3	2	80	Interpolated	
		ACx580-3PxR-014A-4	R3	PxB1-31	Type 1	38.0	8.0	17.3	2	80	Interpolated	
		ACx580-3PxR-023A-4	R3	PxB1-31	Type 1	38.0	8.0	17.3	2	80	Interpolated	
		ACx580-3PxR-027A-4	R6	PxB1-32	Type 1	51.0	10.0	18.8	2	200	Interpolated	
		ACx580-3PxR-034A-4	R6	PxB1-32	Type 1	51.0	10.0	18.8	2	200	Interpolated	
		ACx580-3PxR-044A-4	R6	PxB1-32	Type 1	51.0	10.0	18.8	2	200	Interpolated	
		ACx580-3PxR-052A-4	R6	PxB1-32	Type 1	51.0	10.0	18.8	2	200	Interpolated	
		ACx580-3PxR-065A-4	R6	PxB1-32	Type 1	51.0	10.0	18.8	2	200	Interpolated	
		ACx580-3PxR-077A-4	R6	PxB1-32	Type 1	51.0	10.8	19.0	2	180.4	UUT-26A,B	
		ACx580-3PxR-096A-4	R8	PxB1-33	Type 1	61.9	19.3	21.0	2.3	400	Interpolated	
		ACx580-3PxR-124A-4	R8	PxB1-33	Type 1	61.9	19.3	21.0	2.3	400	Interpolated	
		ACx580-3PxR-156A-4	R8	PxB1-33	Type 1	61.9	19.3	21.0	2.3	400	Interpolated	
ACx580-3PxR-180A-4	R8	PxB1-33	Type 1	61.8	19.4	21.1	2.3	409	UUT-24A,B			

- Notes:
1. ABB is the manufacturer for all units.
 2. All units are wall mounted.
 3. All units were tested in rigid and isolated mounting configurations to SDS=2.0 at z/h=1.0, and SDS=2.5 at z/h=0.0.
 4. PDR/VDR/BDR models use disconnects which weigh less than tested PCR/VCR/BCR models with circuit breakers.
 5. All Cabinets Carbon Steel.
 6. S, H, Q in models are identical product with different industry use.

Table 1 - Certified Products - Panel Mounted Drives With Wall Mounted Enclosure (Cont.)

System Voltage [V]	Model	Construction	ABB Model Number	Base Drive Frame Size	Enclosure Frame Size	Available NEMA Enclosure Types	Type 1, Type 12 Enclosures					Type 3R Enclosures					UUT
							Height [in]	Width [in]	Depth [in]	Thickness [mm]	Max Weight [lb]	Height [in]	Width [in]	Depth [in]	Thickness [mm]	Max Weight [lb]	
200-240	For ACx580: x = S, H, or Q	For zxR: z = B, P, or 0 x = C, D, or P R may be omitted	ACx580-zxR-04A6-2	R1	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Extrapolated
			ACx580-zxR-06A6-2	R1	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Extrapolated
			ACx580-zxR-07A5-2	R1	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Extrapolated
			ACx580-zxR-10A6-2	R1	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Extrapolated
			ACx580-zxR-017A-2	R1	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Extrapolated
			ACx580-zxR-024A-2	R2	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Extrapolated
440-480	For ACx580: x = S, H, or Q	For zxR: z = B, P, or 0 x = C, D, or P R may be omitted	ACx580-zxR-02A1-4	R1	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Extrapolated
			ACx580-zxR-03A0-4	R1	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Extrapolated
			ACx580-zxR-03A5-4	R1	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Extrapolated
			ACx580-zxR-04A8-4	R1	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Extrapolated
			ACx580-zxR-07A6-4	R1	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Extrapolated
			ACx580-zxR-012A-4	R1	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Extrapolated
			ACx580-zxR-014A-4	R2	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Extrapolated
			ACx580-zxR-023A-4	R2	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Extrapolated
			ACH580-BCR-023A-4	R2	B1	1, 12, 3R	33.0	17.0	12.0	1.9	84.0	-	-	-	-	-	UUT-09
575-600	For ACx580: x = S, H, or Q	For zxR: z = B, P, or 0 x = C, D, or P R may be omitted	ACx580-zxR-02A7-6	R2	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Interpolated
			ACx580-zxR-03A9-6	R2	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Interpolated
			ACx580-zxR-06A1-6	R2	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Interpolated
			ACx580-zxR-09A0-6	R2	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Interpolated
			ACx580-zxR-011A-6	R2	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Interpolated
			ACx580-zxR-017A-6	R2	B1	1, 12, 3R	33.2	17.7	13.9	1.9	84	33.4	17.7	14	1.9	134	Interpolated
200-240	For ACx580: x = S, H, or Q	For zxR: z = B, P, or 0 x = C, D, or P R may be omitted	ACx580-zxR-031A-2	R2	B2	1, 12, 3R	40.6	20.7	15.3	1.9	139	40.7	20.7	15.4	1.9	193	Interpolated
			ACx580-zxR-046A-2	R3	B2	1, 12, 3R	40.6	20.7	15.3	1.9	139	40.7	20.7	15.4	1.9	193	Interpolated
			ACx580-zxR-059A-2	R3	B2	1, 12, 3R	40.6	20.7	15.3	1.9	139	40.7	20.7	15.4	1.9	193	Interpolated
			ACx580-zxR-075A-2	R4	B2	1, 12, 3R	40.6	20.7	15.3	1.9	139	40.7	20.7	15.4	1.9	193	Interpolated
440-480	For ACx580: x = S, H, or Q	For zxR: z = B, P, or 0 x = C, D, or P R may be omitted	ACx580-zxR-027A-4	R3	B2	1, 12, 3R	40.6	20.7	15.3	1.9	139	40.7	20.7	15.4	1.9	193	Interpolated
			ACx580-zxR-034A-4	R3	B2	1, 12, 3R	40.6	20.7	15.3	1.9	139	40.7	20.7	15.4	1.9	193	Interpolated
			ACx580-zxR-044A-4	R3	B2	1, 12, 3R	40.6	20.7	15.3	1.9	139	40.7	20.7	15.4	1.9	193	Interpolated
			ACx580-zxR-052A-4	R4	B2	1, 12, 3R	40.6	20.7	15.3	1.9	139	40.7	20.7	15.4	1.9	193	Interpolated
			ACx580-zxR-065A-4	R4	B2	1, 12, 3R	40.6	20.7	15.3	1.9	139	40.7	20.7	15.4	1.9	193	Interpolated
			ACH580-BCR-065A-4	R4	B2	1, 12, 3R	-	-	-	-	-	41.0	21.0	15.0	1.9	190	UUT-10
			ACx580-zxR-077A-4	R4	B2	1, 12, 3R	40.6	20.7	15.3	1.9	139	40.7	20.7	15.4	1.9	193	Interpolated
			ACx580-zxR-022A-6	R3	B2	1, 12, 3R	40.6	20.7	15.3	1.9	139	40.7	20.7	15.4	1.9	193	Interpolated
575-600			ACx580-zxR-027A-6	R3	B2	1, 12, 3R	40.6	20.7	15.3	1.9	139	40.7	20.7	15.4	1.9	193	Interpolated
			ACx580-zxR-032A-6	R3	B2	1, 12, 3R	40.6	20.7	15.3	1.9	139	40.7	20.7	15.4	1.9	193	Interpolated

- Notes:
1. ABB is the manufacturer for all units.
 2. All units are wall mounted.
 3. All units were tested in rigid and isolated mounting configurations to SDS=2.0 at z/h=1.0, and SDS=2.5 at z/h=0.0.
 4. PDR/VDR/BDR models use disconnects which weigh less than tested PCR/VCR/BCR models with circuit breakers.
 5. All Cabinets Carbon Steel. 3R Cabinets are Galvanized for weatherproofing
 6. S, H, Q in models are identical product with different industry use.

Table 1 - Certified Products - Panel Mounted Drives With Wall Mounted Enclosure (Cont.)

System Voltage [V]	Model	Construction	ABB Model Number	Base Drive Frame Size	Enclosure Frame Size	Available NEMA Enclosure Types	Type 1, Type 12 Enclosures					Type 3R Enclosures					UUT
							Height [in]	Width [in]	Depth [in]	Thickness [mm]	Max Weight [lb]	Height [in]	Width [in]	Depth [in]	Thickness [mm]	Max Weight [lb]	
200-240	For ACx580: x = S, H, or Q	For zxR: z = B, P, or 0 x = C, D, or P R may be omitted	ACx580-zxR-088A-2	R5	B3	1, 12	54.2	28.3	19.1	2.7	358	N/A	N/A	N/A	N/A	N/A	Interpolated
			ACx580-zxR-114A-2	R5	B3	1, 12	54.2	28.3	19.1	2.7	358	N/A	N/A	N/A	N/A	N/A	Interpolated
			ACx580-zxR-143A-2	R6	B3	1, 12	54.2	28.3	19.1	2.7	358	N/A	N/A	N/A	N/A	N/A	Interpolated
			ACx580-zxR-169A-2	R7	B3	1, 12	54.2	28.3	19.1	2.7	358	N/A	N/A	N/A	N/A	N/A	Interpolated
			ACx580-zxR-211A-2	R7	B3	1, 12	54.2	28.3	19.1	2.7	358	N/A	N/A	N/A	N/A	N/A	Interpolated
			ACx580-zxR-248A-2	R8	B3	1, 12	54.2	28.3	19.1	2.7	358	N/A	N/A	N/A	N/A	N/A	Interpolated
575-600	For ACx580: x = S, H, or Q	For zxR: z = B, P, or 0 x = C, D, or P R may be omitted	ACx580-zxR-041A-6	R5	B3	1, 12	54.2	28.3	19.1	2.7	358	N/A	N/A	N/A	N/A	N/A	Interpolated
			ACx580-zxR-052A-6	R5	B3	1, 12	54.2	28.3	19.1	2.7	358	N/A	N/A	N/A	N/A	N/A	Interpolated
			ACx580-zxR-062A-6	R5	B3	1, 12	54.2	28.3	19.1	2.7	358	N/A	N/A	N/A	N/A	N/A	Interpolated
			ACx580-zxR-077A-6	R5	B3	1, 12	54.2	28.3	19.1	2.7	358	N/A	N/A	N/A	N/A	N/A	Interpolated
			ACx580-zxR-099A-6	R7	B3	1, 12	54.2	28.3	19.1	2.7	358	N/A	N/A	N/A	N/A	N/A	Interpolated
			ACx580-zxR-125A-6	R7	B3	1, 12	54.2	28.3	19.1	2.7	358	N/A	N/A	N/A	N/A	N/A	Interpolated
440-480	For ACx580: x = S, H, or Q	For zxR: z = B, P, or 0 x = C, D, or P R may be omitted	ACx580-zxR-144A-6	R8	B3	1, 12	54.2	28.3	19.1	2.7	358	N/A	N/A	N/A	N/A	N/A	Interpolated
			ACx580-zxR-096A-4	R5	B3	1, 12	54.2	28.3	19.1	2.7	358	N/A	N/A	N/A	N/A	N/A	Interpolated
			ACx580-zxR-124A-4	R6	B3	1, 12	54.2	28.3	19.1	2.7	358	N/A	N/A	N/A	N/A	N/A	Interpolated
			ACx580-zxR-156A-4	R7	B3	1, 12	54.2	28.3	19.1	2.7	358	N/A	N/A	N/A	N/A	N/A	Interpolated
			ACx580-zxR-180A-4	R7	B3	1, 12	54.2	28.3	19.1	2.7	358	N/A	N/A	N/A	N/A	N/A	Interpolated
			ACx580-zxR-240A-4	R8	B3	1, 12	54.2	28.3	19.1	2.7	358	N/A	N/A	N/A	N/A	N/A	Interpolated
			ACH580-BCR-240A-4	R8	B3	1, 12	47.0	28.0	18.0	2.7	358	-	-	-	-	-	UUT-11

- Notes:
1. ABB is the manufacturer for all units.
 2. All units are wall mounted.
 3. All units were tested in rigid and isolated mounting configurations to SDS=2.0 at z/h=1.0, and SDS=2.5 at z/h=0.0.
 4. PDR/VDR/BDR models use disconnects which weigh less than tested PCR/VCR/BCR models with circuit breakers.
 5. All Cabinets Carbon Steel. 3R Cabinets are Galvanized for weatherproofing
 6. S, H, Q in models are identical product with different industry use.

Table 2a - Certified Products - Panel Mounted Drives With Rigid Floor Mounted Enclosure

System Voltage [V]	Model	Construction	ABB Model Number	Base Drive Frame Size	Enclosure Details							UUT
					Frame Size	NEMA Rating	Max Height [in]	Max Width [in]	Max Depth [in]	Thick-ness [mm]	Max Weight [lb]	
208/240	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-143A-2	R6	BX1-5	1	73.44	34.75	20.4	1.9	465	Extrapolated
			ACx580-BxR-169A-2	R7	BX1-5	1	73.44	34.75	20.4	1.9	465	Extrapolated
			ACx580-BxR-211A-2	R7	BX1-5	1	73.44	34.75	20.4	1.9	465	Extrapolated
			ACx580-BxR-273A-2	R8	BX1-5	1	73.44	34.75	20.4	1.9	465	Extrapolated
440-480	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-124A-4	R6	BX1-5	1	73.44	34.75	20.4	1.9	465	Extrapolated
			ACx580-BxR-156A-4	R7	BX1-5	1	73.44	34.75	20.4	1.9	465	Extrapolated
			ACx580-BxR-180A-4	R7	BX1-5	1	73.44	34.75	20.4	1.9	465	Extrapolated
208/240	For ACx580: x = S, H, or Q	For PxR: x = C or D	ACx580-PxR-273A-2	R8	PXB1-5	1	73.4	34.75	20.4	1.9	515	Extrapolated
208/240	ACS880	For PxR: x = C or D	ACS880-PxR-274A-2	R8	PXB1-5	1	73.4	34.75	20.4	1.9	515	Extrapolated
440-480	For ACx580: x = S, H, or Q	For PxR: x = C or D	ACx580-PxR-240A-4	R8	PXB1-5	1	73.4	34.75	20.4	1.9	515	Extrapolated
440-480	ACS880	For PxR: x = C or D	ACS880-PxR-240A-4	R8	PXB1-5	1	73.4	34.75	20.4	1.9	515	Extrapolated
			ACS880-PxR-260A-4	R8	PXB1-5	1	73.4	34.75	20.4	1.9	515	Extrapolated
208/240	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-211A-2	R7	BX12-5	12	72	36	20.9	1.52	677	Extrapolated
			ACx580-BxR-273A-2	R8	BX12-5	12	72	36	20.9	1.52	677	Extrapolated
440-480	ACH580	-	ACH580-BCR-240A-4	R8	BX1-6	1	78.0	32.0	25.0	1.52	720	UUT-17
208/240	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-211A-2	R7	BX1-6	1	78	32	27.3	1.52	728	Interpolated
			ACx580-BxR-273A-2	R8	BX1-6	1	78	32	27.3	1.52	728	Interpolated
440-480	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-240A-4	R8	BX1-6	1	78	32	27.3	1.52	728	Interpolated
208/240	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-211A-2	R7	BX12-6	12	78	32	27.3	1.52	728	Interpolated
			ACx580-BxR-273A-2	R8	BX12-6	12	78	32	27.3	1.52	728	Interpolated
440-480	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-240A-4	R8	BX12-6	12	78	32	27.3	1.52	728	Interpolated
440-480	For ACx580: x = S, H, or Q	For PxR: x = C or D	ACx580-PxR-302A-4	R9	PXB12-6	12	78	32	27.3	1.52	765	Interpolated
			ACx580-PxR-361A-4	R9	PXB12-6	12	78	32	27.3	1.52	765	Interpolated
			ACx580-PxR-414A-4	R9	PXB12-6	12	78	32	27.3	1.52	765	Interpolated
440-480	ACS880	For PxR: x = C or D	ACS880-PxR-302A-4	R9	PXB12-6	12	78	32	27.3	1.52	765	Interpolated
			ACS880-PxR-361A-4	R9	PXB12-6	12	78	32	27.3	1.52	765	Interpolated
			ACS880-PxR-414A-4	R9	PXB12-6	12	78	32	27.3	1.52	765	Interpolated
440-480	For ACx580: x = S, H, or Q	For PxR: x = C or D	ACx580-PxR-302A-4	R9	PXB1-6	1	78	32	27.3	1.52	765	Interpolated
			ACx580-PxR-361A-4	R9	PXB1-6	1	78	32	27.3	1.52	765	Interpolated
			ACx580-PxR-414A-4	R9	PXB1-6	1	78	32	27.3	1.52	765	Interpolated
440-480	ACS880	For PxR: x = C or D	ACS880-PxR-302A-4	R9	PXB1-6	1	78	32	27.3	1.52	765	Interpolated
			ACS880-PxR-361A-4	R9	PXB1-6	1	78	32	27.3	1.52	765	Interpolated
			ACS880-PxR-414A-4	R9	PXB1-6	1	78	32	27.3	1.52	765	Interpolated
440-480	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-211A-2	R7	Bx3R-5	3R	78	44	31.25	1.52	768	Interpolated
			ACx580-BxR-273A-2	R8	Bx3R-5	3R	78	44	31.25	1.52	768	Interpolated
			ACx580-BxR-240A-4	R8	Bx3R-5	3R	78	44	31.25	1.52	768	Interpolated
440-480	ACS880	For PxR: x = C or D	ACS880-PxR-302A-4	R9	PxB3R-5	3R	78	44	31.25	1.52	815	Interpolated
			ACS880-PxR-361A-4	R9	PxB3R-5	3R	78	44	31.25	1.52	815	Interpolated
			ACS880-PxR-414A-4	R9	PxB3R-5	3R	78	44	31.25	1.52	815	Interpolated
440-480	For ACx580: x = S, H, or Q	For PxR: x = C or D	ACx580-PxR-302A-4	R9	PxB3R-5	3R	78	44	31.25	1.52	815	Interpolated
			ACx580-PxR-361A-4	R9	PxB3R-5	3R	78	44	31.25	1.52	815	Interpolated
			ACx580-PxR-414A-4	R9	PxB3R-5	3R	78	44	31.25	1.52	815	Interpolated
440-480	ACH580	-	ACH580-PCR-414A-4	R9	PxB3R-5	3R	78	44.3	32	1.52	720	UUT-19
440-480V	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-302A-4	R9	BX12-7	12	84	48	27.3	2.75	1170	Interpolated
			ACx580-BxR-361A-4	R9	BX12-7	12	84	48	27.3	2.75	1170	Interpolated
			ACx580-BxR-414A-4	R9	BX12-7	12	84	48	27.3	2.75	1170	Interpolated
440-480V	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-302A-4	R9	BX1-7	1	84	48	27.3	2.75	1170	Interpolated
			ACx580-BxR-361A-4	R9	BX1-7	1	84	48	27.3	2.75	1170	Interpolated
			ACx580-BxR-414A-4	R9	BX1-7	1	84	48	27.3	2.75	1170	Interpolated
440-480V	For ACx580: x = S, H, or Q	For BxR: x = C or D	ACx580-BxR-302A-4	R9	Bx3R-6	3R	84	60	31.25	2.75	1170	Interpolated
			ACx580-BxR-361A-4	R9	Bx3R-6	3R	84	60	31.25	2.75	1170	Interpolated
440-480V	ACH580	For BxR:	ACH580-BCR-414A-4	R9	Bx3R-6	3R	84	55	28.5	2.75	1170	UUT-20

- Notes: 1. ABB is the manufacturer for all units. 2. All units are floor mounted. 3. S, H, Q in models are identical product with different industry use. 4. PDR/VDR/BDR models use disconnects which weigh less than tested PCR/VCR/BCR models with circuit breakers. 5. All Cabinets Carbon Steel. 3R Cabinets are Galvanized for weatherproofing. 6. All units were tested in rigid mounting configuration to SDS=2.0 at z/h=1.0, and SDS=2.5 at z/h=0.0.

Table 2b - Certified Products - Panel Mounted Drives With Combination Rigid Floor and Wall Mounted Enclosure

System Voltage [V]	Model	Construction	ABB Model Number	Base Drive Frame Size	Enclosure Details							UUT
					Frame Size	NEMA Rating	Max Height [in]	Max Width [in]	Max Depth [in]	Thick-ness [mm]	Max Weight [lb]	
440-480	For ACx580: x = H, or Q	For BxR: x = C or D	ACH580-3BxR-096A-4	R8	Bx1-33	Type 1	73.4	35	20.4	2	500	Interpolated
			ACH580-3BxR-124A-4	R8	Bx1-33	Type 1	73.4	35	20.4	2	500	Interpolated
			ACH580-3BxR-156A-4	R8	Bx1-33	Type 1	73.4	35	20.4	2	500	Interpolated
			ACH580-3BxR-180A-4	R8	Bx1-33	Type 1	73.5	34.8	20.5	2	550	UUT-27
		For 3BxR: x = C or D	ACx580-3BxR-240A-4	R11	PxB1/12-41	Type 1/12	90	55	25	1.5	1510	Interpolated
			ACx580-3BxR-302A-4	R11	PxB1/12-41	Type 1/12	90	55	25	1.5	1510	Interpolated
			ACx580-3BxR-361A-4	R11	PxB1/12-41	Type 1/12	90	55	25	1.5	1510	Interpolated
			ACx580-3BxR-414A-4	R11	PxB1/12-41	Type 1/12	90	55	25	1.5	1510	Interpolated
		For 3PxR: x = C or D	ACx580-3BxR-477A-4	R11	PxB1/12-41	Type 1/12	91	55	25.8	1.5	1440	UUT-28
			ACx580-3PxR-240A-4	R11	PxB1/12-41	Type 1/12	90	55	25	1.5	1510	Interpolated
			ACx580-3PxR-302A-4	R11	PxB1/12-41	Type 1/12	90	55	25	1.5	1510	Interpolated
			ACx580-3PxR-361A-4	R11	PxB1/12-41	Type 1/12	90	55	25	1.5	1510	Interpolated
			ACx580-3PxR-414A-4	R11	PxB1/12-41	Type 1/12	90	55	25	1.5	1510	Interpolated
			ACx580-3PxR-477A-4	R11	PxB1/12-41	Type 1/12	91	47	25.8	1.5	1290	UUT-29

- Notes: 1. ABB is the manufacturer for all units. 2. All units are combination floor and wall mounted. 3. S, H, Q in models are identical product with different industry use. 4. PDR/VDR/BDR models use disconnects which weigh less than tested PCR/VCR/BCR models with circuit breakers. 5. All Cabinets Carbon Steel. Type 1 cabinets are similar less robust design than Type 12 cabinets. 6. All units were tested in rigid mounting configuration to SDS=2.0 at z/h=1.0, and SDS=2.5 at z/h=0.0.

Table 3 - Certified Subcomponents - Drives - 580-01 & 880-01 - Wall Mounted

System Voltage [V]	Model ⁵	ABB Model Number	Ratings						Frame Size	Available Enclosure Types	Type 1		Type 12		UUT
			Normal Duty		Light Duty		Heavy Duty				Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	
			Current [A]	kW / HP	Current [A]	kW / HP	Current [A]	kW / HP							
200-240	For ACx580: x = S, H, or Q (IEC)	ACx580-01-04A7-2	4.7	0.75 kW	4.6	0.75 kW	3.5	0.75 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-06A7-2	6.7	1.10 kW	6.6	1.10 kW	4.6	0.75 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-07A6-2	7.6	1.50 kW	7.5	1.50 kW	6.6	1.10 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-012A-2	12.0	2.20 kW	11.8	2.20 kW	7.5	1.50 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-018A-2	16.9	4.00 kW	16.7	4.00 kW	10.6	2.20 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-02A7-4	2.6	0.75 kW	2.5	0.75 kW	1.8	0.55 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-03A4-4	3.3	1.10 kW	3.1	1.10 kW	2.6	0.75 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-04A1-4	4	1.50 kW	3.8	1.50 kW	3.3	1.10 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-05A7-4	5.6	2.20 kW	5.3	2.20 kW	4	1.50 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-07A3-4	7.2	3.00 kW	6.8	3.00 kW	5.6	2.20 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
380-480	For ACx580: x = S, H, or Q (IEC)	ACx580-01-09A5-4	9.4	4.00 kW	8.9	4.00 kW	7.2	3.00 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-12A7-4	12.6	5.50 kW	12	5.50 kW	9.4	4.00 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-04A6-2	4.6	1.00 HP	4.6	1.00 HP	3.5	0.80 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-06A6-2	6.6	1.50 HP	6.6	1.50 HP	4.6	1.00 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-07A5-2	7.5	2.00 HP	7.5	2.00 HP	6.6	1.50 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-10A6-2	10.6	3.00 HP	10.6	3.00 HP	7.5	2.00 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-017A-2	16.7	5.00 HP	16.7	5.00 HP	10.6	3.00 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-02A1-4	NA	NA	2.1	1.00 HP	1.6	0.75 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-03A0-4	NA	NA	3	1.50 HP	2.1	1.00 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-03A5-4	NA	NA	3.5	2.00 HP	3	1.50 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
440-480	For Axx580: xx = CS, CH, CQ, or YK (NEC)	Axx580-01-04A8-4	NA	NA	4.8	3.00 HP	3.4	2.00 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-06A0-4	NA	NA	6	3.00 HP	4	3.00 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-07A6-4	NA	NA	7.6	5.00 HP	4.8	3.00 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-012A-4	NA	NA	12	7.50 HP	7.6	5.00 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACH580-01-012A-4	NA	NA	12	7.50 HP	7.6	5.00 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	-	-	UUT-05 ⁶
		ACx580-01-025A-2	24.5	5.50 kW	24.2	5.50 kW	16.7	4.00 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated
		ACx580-01-032A-2	31.2	7.50 kW	30.8	7.50 kW	24.2	5.50 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated
		ACx580-01-018A-4	17	7.50 kW	16.2	7.50 kW	12.6	5.50 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated
		ACx580-01-026A-4	25	11.00 kW	23.8	11.00 kW	17	7.50 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated
		ACx580-01-02A7-6	NA	NA	2.7	1.50 kW	2.4	1.10 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated
200-240	For ACx580: x = S, H, or Q (IEC)	ACx580-01-03A9-6	NA	NA	3.9	2.20 kW	2.7	1.50 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated
		ACx580-01-06A1-6	NA	NA	6.1	4.00 kW	3.9	2.20 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated
		ACx580-01-09A0-6	NA	NA	9	5.50 kW	6.1	4.00 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated
		ACx580-01-11A0-6	NA	NA	11	7.50 kW	9	5.50 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated
		ACx580-01-017A-6	NA	NA	17	11.00 kW	11	7.50 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated
		Axx580-01-024A-2	24.2	7.50 HP	24.2	7.50 HP	16.7	5.00 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated
		Axx580-01-031A-2	31	10.00 HP	31	10.00 HP	24.2	7.50 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated
		Axx580-01-014A-4	NA	NA	14	10.00 HP	11	7.50 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated
		Axx580-01-023A-4	NA	NA	23	15.00 HP	15	10.00 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated
		ACH580-01-023A-4	NA	NA	23	15.00 HP	15	10.00 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	-	-	UUT-09 ⁶
440-480	For Axx580: xx = CS, CH, CQ, or YK (NEC)	Axx580-01-02A7-6	NA	NA	2.7	2.00 HP	2.4	1.50 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated
		Axx580-01-03A9-6	NA	NA	3.9	3.00 HP	2.7	2.00 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated
		Axx580-01-06A1-6	NA	NA	6.1	5.00 HP	3.9	3.00 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated
		Axx580-01-09A0-6	NA	NA	9	7.50 HP	6.1	5.00 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated
		Axx580-01-011A-6	NA	NA	11	10.00 HP	9	7.50 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated
		Axx580-01-017A-6	NA	NA	17	15.00 HP	11	10.00 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Interpolated

Notes: 1. ABB is the manufacturer for all units.
 2. For ACS880-01-xxxx-2, -5, -7 both NEC and IEC ratings apply. Table shows only NEC rating. ACS880-01-xxxx-3 is only available as IEC rating.
 3. All units were tested in rigid and isolated mounting configurations to SDS=2.0 at z/h=1.0, and SDS=2.5 at z/h=0.0.
 4. When an Optional Subcomponent is present, its Type Code is appended to the model number
 5. AYK580-01 units are identical to ACx580-01 units other than software and branding
 6. Listed drive model was tested as a subcomponent within listed UUT

Table 3 - Certified Subcomponents - Drives - 580-01 & 880-01 - Wall Mounted (Cont.)

System Voltage [V]	Model ⁵	ABB Model Number	Ratings						Frame Size	Available Enclosure Types	Type 1		Type 12		UUT	
			Normal Duty		Light Duty		Heavy Duty				Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]		
			Current [A]	kW / HP	Current [A]	kW / HP	Current [A]	kW / HP								
208-240	ACS880 See Note 2 below	ACS880-01-04A6-2	4.6	1.00 HP	4.4	1.00 HP	3.7	0.75 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Interpolated	
		ACS880-01-06A6-2	6.6	1.50 HP	6.3	1.50 HP	4.6	1.00 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Interpolated	
		ACS880-01-07A5-2	7.5	2.00 HP	7.1	2.00 HP	6.6	1.50 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Interpolated	
ACS880-01-10A6-2		10.6	3.00 HP	10.1	3.00 HP	7.5	2.00 kW	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Interpolated		
380-415		ACS880-01-02A4-3	2.4	0.75 kW	2.3	0.75 kW	1.8	0.55 kW	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Interpolated	
		ACS880-01-03A3-3	3.3	1.10 kW	3.1	1.10 kW	2.4	0.75 kW	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Interpolated	
		ACS880-01-04A0-3	4	1.50 kW	3.8	1.50 kW	3.3	1.10 kW	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Interpolated	
		ACS880-01-05A6-3	5.6	2.20 kW	5.3	2.20 kW	4	1.50 kW	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Interpolated	
		ACS880-01-07A2-3	8	3.00 kW	7.6	3.00 kW	5.6	2.20 kW	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Interpolated	
		ACS880-01-09A4-3	10	4.00 kW	9.5	4.00 kW	8	3.00 kW	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Interpolated	
380-500		ACS880-01-12A6-3	12.9	5.50 kW	12	5.50 kW	10	4.00 kW	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Interpolated	
		ACS880-01-02A1-5	NA	NA	2.1	1.00 HP	1.7	0.75 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Interpolated	
		ACS880-01-03A0-5	NA	NA	3	1.50 HP	2.1	1.00 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Interpolated	
		ACS880-01-03A4-5	NA	NA	3.4	2.00 HP	3	1.50 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Interpolated	
		ACS880-01-04A8-5	NA	NA	4.8	3.00 HP	3.4	2.00 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Interpolated	
		ACS880-01-05A2-5	NA	NA	5.2	3.00 HP	4.8	2.00 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Interpolated	
208-240		ACS880-01-07A6-5	NA	NA	7.6	5.00 HP	5.2	3.00 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Interpolated	
		ACS880-01-11A0-5	NA	NA	11	7.50 HP	7.6	5.00 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Interpolated	
		ACS880-01-16A8-2	16.8	5.00 HP	16	5.00 HP	10.6	3.00 HP	R2	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 9.82	19.0	17.72 x 6.38 x 12.40	21.0	Interpolated	
380-415		ACS880-01-24A3-2	24.3	7.50 HP	23.1	7.50 HP	16.8	5.00 HP	R2	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 9.82	19.0	17.72 x 6.38 x 12.40	21.0	Interpolated	
		ACS880-01-017A-3	17	7.50 kW	16	7.50 kW	12.6	5.50 kW	R2	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 9.82	19.0	17.72 x 6.38 x 12.40	21.0	Interpolated	
		ACS880-01-025A-3	25	11.00 kW	24	11.00 kW	17	7.50 kW	R2	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 9.82	19.0	17.72 x 6.38 x 12.40	21.0	Interpolated	
380-500		ACS880-01-014A-5	NA	NA	14	10.00 HP	11	7.50 HP	R2	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 9.82	19.0	17.72 x 6.38 x 12.40	21.0	Interpolated	
		ACS880-01-021A-5	NA	NA	21	15.00 HP	14	10.00 HP	R2	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 9.82	19.0	17.72 x 6.38 x 12.40	21.0	Interpolated	
208-240		ACS880-01-031A-2	31	10.00 HP	29.3	10.00 HP	24.3	7.50 HP	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Interpolated	
380-415		ACS880-01-032A-3	32	15.00 kW	30	15.00 kW	25	11.00 kW	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Interpolated	
		ACS880-01-038A-3	38	18.50 kW	36	18.50 kW	32	15.00 kW	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Interpolated	
380-500		ACS880-01-027A-5	NA	NA	27	20.00 HP	21	15.00 HP	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Interpolated	
		ACS880-01-034A-5	NA	NA	34	25.00 HP	27	20.00 HP	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Interpolated	
		ACS880-01-034A-5	NA	NA	34	25.00 HP	27	20.00 HP	R3	UL Open, 1, 12; IP 20,21,55	13.0" x 7.0 x 10.0	24.0	-	-	UUT-14	
525-690	ACS880-01-07A4-7	NA	NA	7	5.00 HP	5.6	3.00 HP	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Interpolated		
	ACS880-01-09A9-7	NA	NA	9.4	7.50 HP	7.4	5.00 HP	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Interpolated		
	ACS880-01-14A3-7	NA	NA	13.6	10.00 HP	9.9	7.50 HP	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Interpolated		
	ACS880-01-019A-7	NA	NA	18	15.00 HP	14.3	10.00 HP	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Interpolated		
	ACS880-01-023A-7	NA	NA	22	20.00 HP	19	15.00 HP	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Interpolated		
	ACS880-01-027A-7	NA	NA	27	25.00 HP	23	20.00 HP	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Interpolated		
200-240	For Axx580: xx = CS, CH, CQ, or YK (NEC)	Axx580-01-046A-2	46.2	15.00 HP	46.2	15.00 HP	30.8	10.00 HP	R3	UL Open, 1, 12	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Interpolated	
		Axx580-01-059A-2	59.4	20.00 HP	59.4	20.00 HP	46.2	15.00 HP	R3	UL Open, 1, 12	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Interpolated	
Axx580-01-027A-4		NA	NA	27	20.00 HP	21	15.00 HP	R3	UL Open, 1, 12	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Interpolated		
Axx580-01-034A-4		NA	NA	34	25.00 HP	27	20.00 HP	R3	UL Open, 1, 12	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Interpolated		
Axx580-01-044A-4		NA	NA	44	30.00 HP	34	25.00 HP	R3	UL Open, 1, 12	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Interpolated		
ACH580-01-044A-4		NA	NA	44	30.00 HP	34	25.00 HP	R3	UL Open, 1, 12	19.0 x 8.0 x 9.0	26.1	-	-	UUT-01		
ACH580-01-044A-4		NA	NA	44	30.00 HP	34	25.00 HP	R3	UL Open, 1, 12	19.29 x 7.99 x 9.02	26.1	-	-	UUT-07 ⁶		
575-600		For Axx580: xx = CS, CH, CQ, or YK (NEC)	Axx580-01-022A-6	NA	NA	22	20.00 HP	17	15.00 HP	R3	UL Open, 1, 12	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Interpolated
		Axx580-01-027A-6	NA	NA	27	25.00 HP	22	20.00 HP	R3	UL Open, 1, 12	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Interpolated	
		Axx580-01-032A-6	NA	NA	32	30.00 HP	27	25.00 HP	R3	UL Open, 1, 12	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Interpolated	

Notes: 1. ABB is the manufacturer for all units.
 2. For ACS880-01-xxxx-2, -5, -7 both NEC and IEC ratings apply. Table shows only NEC rating. ACS880-01-xxxx-3 is only available as IEC rating.
 3. All units were tested in rigid and isolated mounting configurations to SDS=2.0 at z/h=1.0, and SDS=2.5 at z/h=0.0.
 4. Type Code appended to model number when an Optional Subcomponent is used

5. AYK580-01 units are identical to ACx580-01 units other than software and branding
 6. Listed drive model was tested as a subcomponent within listed UUT
 7. Height measurements is for drive component without enclosure

Table 3 - Certified Subcomponents - Drives - 580-01 & 880-01 - Wall Mounted (Cont.)

System Voltage [V]	Model ⁵	ABB Model Number	Ratings						Frame Size	Available Enclosure Types	Type 1		Type 12		UUT
			Normal Duty		Light Duty		Heavy Duty				Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	
			Current	kW / HP	Current	kW / HP	Current	kW / HP							
200-240	For ACx580: x = S, H, or Q (IEC)	ACx580-01-047A-2	46.7	11.00 kW	46.2	11.00 kW	30.8	7.50 kW	R3	IP 20, 21, 55	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Interpolated
		ACx580-01-060A-2	60.0	15.00 kW	59.4	15.00 kW	46.2	11.00 kW	R3	IP 20, 21, 55	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Interpolated
		ACx580-01-033A-4	32	15.00 kW	30.4	15.00 kW	24.6	11.00 kW	R3	IP 20, 21, 55	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Interpolated
		ACx580-01-039A-4	38	18.50 kW	36.1	18.50 kW	31.6	15.00 kW	R3	IP 20, 21, 55	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Interpolated
		ACx580-01-046A-4	45	22.00 kW	42.8	22.00 kW	37.7	18.50 kW	R3	IP 20, 21, 55	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Interpolated
		ACx580-01-022A-6	NA	NA	22	15.00 kW	17	11.00 kW	R3	IP 20, 21, 55	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Interpolated
380-480	For ACx580: x = S, H, or Q (IEC)	ACx580-01-027A-6	NA	NA	27	18.50 kW	22	15.00 kW	R3	IP 20, 21, 55	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Interpolated
		ACx580-01-032A-6	NA	NA	32	22.00 kW	27	19.00 kW	R3	IP 20, 21, 55	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Interpolated
		ACS880-01-046A-2	46	15.00 HP	44	15.00 HP	38	10.00 HP	R4	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	41.1	28.93 x 9.30 x 13.54	42.2	Interpolated
208-240	ACS880 See Note 2 below	ACS880-01-061A-2	61	20.00 HP	58	20.00 HP	45	15.00 HP	R4	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	41.1	28.93 x 9.30 x 13.54	42.2	Interpolated
		ACS880-01-045A-3	45	22.00 kW	43	22.00 kW	38	18.50 kW	R4	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	41.1	28.93 x 9.30 x 13.54	42.2	Interpolated
		ACS880-01-061A-3	61	30.00 kW	58	30.00 kW	45	22.00 kW	R4	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	41.1	28.93 x 9.30 x 13.54	42.2	Interpolated
380-415	ACS880 See Note 2 below	ACS880-01-040A-5	NA	NA	40	30.00 HP	34	25.00 HP	R4	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	41.1	28.93 x 9.30 x 13.54	42.2	Interpolated
		ACS880-01-052A-5	NA	NA	52	40.00 HP	40	30.00 HP	R4	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	41.1	28.93 x 9.30 x 13.54	42.2	Interpolated
380-500	ACS880 See Note 2 below	ACS880-01-052A-5	NA	NA	52	40.00 HP	40	30.00 HP	R4	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	41.1	28.93 x 9.30 x 13.54	42.2	Interpolated
		ACS880-01-052A-5	NA	NA	52	40.00 HP	40	30.00 HP	R4	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	41.1	28.93 x 9.30 x 13.54	42.2	Interpolated
200-240	For ACx580: x = S, H, or Q (IEC)	ACx580-01-076A-2	76	18.50 kW	74.8	18.50 kW	59.4	15.00 kW	R4	IP 20, 21, 55	25.04 x 7.99 x 10.13	41.9	27.03 x 8.59 x 10.43	44.1	Interpolated
		ACx580-01-062A-4	62	30.00 kW	58	30.00 kW	45	22.00 kW	R4	IP 20, 21, 55	25.04 x 7.99 x 10.13	41.9	27.03 x 8.59 x 10.43	44.1	Interpolated
380-480	For ACx580: x = S, H, or Q (IEC)	ACx580-01-073A-4	73	37.00 kW	68	37.00 kW	61	30.00 kW	R4	IP 20, 21, 55	25.04 x 7.99 x 10.13	41.9	27.03 x 8.59 x 10.43	44.1	Interpolated
		ACx580-01-073A-4	73	37.00 kW	68	37.00 kW	61	30.00 kW	R4	IP 20, 21, 55	25.04 x 7.99 x 10.13	41.9	27.03 x 8.59 x 10.43	44.1	Interpolated
200-240	For Axx580: xx = CS, CH, CQ, or YK (NEC)	ACx580-01-075A-2	NA	NA	74.8	25.00 HP	59.4	20.00 HP	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Interpolated
		ACx580-01-090A-2	NA	NA	90	30.00 HP	75	25.00 HP	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Interpolated
		ACx580-01-076A-2	NA	NA	75	18.5 kW	59	15.00 kW	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Interpolated
		ACx580-01-091A-2	NA	NA	88	22.0 Kw	75	18.5 kW	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Interpolated
		Axx580-01-075A-2	74.8	25.00 HP	74.8	25.00 HP	59.4	20.00 HP	R4	UL Open, 1, 12	25.04 x 7.99 x 10.13	41.9	27.03 x 8.59 x 10.43	44.1	Interpolated
		Axx580-01-052A-4	NA	NA	52	40.00 HP	40	30.00 HP	R4	UL Open, 1, 12	25.04 x 7.99 x 10.13	41.9	27.03 x 8.59 x 10.43	44.1	Interpolated
440-480	For Axx580: xx = CS, CH, CQ, or YK (NEC)	Axx580-01-065A-4	NA	NA	65	50.00 HP	52	40.00 HP	R4	UL Open, 1, 12	25.04 x 7.99 x 10.13	41.9	-	-	UUT-06 ⁶
		ACH580-01-065A-4	NA	NA	65	50.00 HP	52	40.00 HP	R4	UL Open, 1, 12	25.04 x 7.99 x 10.13	41.9	-	-	UUT-08 ⁶
		ACH580-01-065A-4	NA	NA	65	50.00 HP	52	40.00 HP	R4	UL Open, 1, 12	25.04 x 7.99 x 10.13	41.9	-	-	UUT-10 ⁶
		Axx580-01-052A-4	NA	NA	52	40.00 HP	40	30.00 HP	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Extrapolated
		Axx580-01-065A-4	NA	NA	65	50.00 HP	52	40.00 HP	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Extrapolated
		Axx580-01-077A-4	NA	NA	77	60.00 HP	65	50.00 HP	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Extrapolated
		ACx580-01-062A-4	NA	NA	58	30.00 kW	45	22.00 kW	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Extrapolated
		ACx580-01-073A-4	NA	NA	68	37.00 kW	61	30.00 kW	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Extrapolated
		ACx580-01-089A-4	NA	NA	83	45.00 kW	72	37.00 kW	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Extrapolated
		Axx580-01-077A-4	NA	NA	77	60.00 HP	65	50.00 HP	R4	UL Open, 1, 12	25.04 x 7.99 x 10.13	41.9	27.03 x 8.59 x 10.43	44.1	Interpolated
208-240	ACS880 See Note 2 below	ACS880-01-075A-2	75	25.00 HP	71	25.00 HP	61	20.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Interpolated
		ACS880-01-087A-2	87	30.00 HP	83	30.00 HP	72	25.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Interpolated
		ACS880-01-072A-3	72	37.00 kW	68	37.00 kW	61	30.00 kW	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Interpolated
		ACS880-01-087A-3	87	45.00 kW	83	45.00 kW	72	37.00 kW	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Interpolated
		ACS880-01-065A-5	NA	NA	65	50.00 HP	52	40.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Interpolated
		ACS880-01-077A-5	NA	NA	77	60.00 HP	65	50.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Interpolated
		ACS880-01-07A3-7	NA	NA	9	7.50 HP	6.1	5.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Interpolated
		ACS880-01-09A8-7	NA	NA	11	10.00 HP	9	7.50 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Interpolated
		ACS880-01-14A2-7	NA	NA	17	15.00 HP	11	10.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Interpolated
		ACS880-01-018A-7	NA	NA	22	20.00 HP	17	15.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Interpolated
		ACS880-01-022A-7	NA	NA	27	25.00 HP	22	20.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Interpolated
		ACS880-01-026A-7	NA	NA	32	30.00 HP	27	25.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Interpolated
		ACS880-01-035A-7	NA	NA	41	40.00 HP	32	30.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Interpolated
		ACS880-01-042A-7	NA	NA	52	50.00 HP	41	40.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Interpolated
		ACS880-01-049A-7	NA	NA	52	50.00 HP	41	40.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Interpolated
		200-240	For ACx580: x = S, H, or Q (IEC)	ACx580-01-089A-2	89	22.00 kW	88	22.00 kW	74.8	18.50 kW	R5	IP 20, 21, 55	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60
ACx580-01-115A-2	115			30.00 kW	114	30.00 kW	88	22.00 kW	R5	IP 20, 21, 55	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
380-480	For ACx580: x = S, H, or Q (IEC)	ACx580-01-088A-4	88	45.00 kW	83	45.00 kW	72	37.00 kW	R5	IP 20, 21, 55	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
		ACx580-01-106A-4	106	55.00 kW	100	55.00 kW	87	45.00 kW	R5	IP 20, 21, 55	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
575-600	For ACx580: x = S, H, or Q (IEC)	ACx580-01-041A-6	NA	NA	41	30.00 kW	32	22.00 kW	R5	IP 20, 21, 55	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
		ACx580-01-052A-6	NA	NA	52	37.00 kW	41	30.00 kW	R5	IP 20, 21, 55	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
		ACx580-01-062A-6	NA	NA	62	45.00 kW	52	37.00 kW	R5	IP 20, 21, 55	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
		ACx580-01-077A-6	NA	NA	77	55.00 kW	62	45.00 kW	R5	IP 20, 21, 55	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
		ACH580-01-077A-6	NA	NA	62	60.00 HP	52	50.00 HP	R5	UL Open, 1, 12	28.83 x 7.99 x 11.61	62.4	-	-	UUT-21 ⁶

Table 3 - Certified Subcomponents - Drives - 580-01 & 880-01 - Wall Mounted (Cont.)

System Voltage [V]	Model ⁵	ABB Model Number	Ratings						Frame Size	Available Enclosure Types	Type 1		Type 12		UUT
			Normal Duty		Light Duty		Heavy Duty				Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	
			Current [A]	kW / HP	Current [A]	kW / HP	Current [A]	kW / HP							
200-240	For Axx580: xx = CS, CH, CQ, or YK (NEC)	Axx580-01-088A-2	88	30.00 HP	88	30.00 HP	74.8	25.00 HP	R5	UL Open, 1, 12	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
440-480		Axx580-01-114A-2	114	40.00 HP	114	40.00 HP	88	30.00 HP	R5	UL Open, 1, 12	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
		Axx580-01-078A-4	NA	NA	77	60.00 HP	65	50.00 HP	R5	UL Open, 1, 12	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
575-600		Axx580-01-096A-4	NA	NA	96	75.00 HP	77	60.00 HP	R5	UL Open, 1, 12	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
		Axx580-01-041A-6	NA	NA	41	40.00 HP	32	30.00 HP	R5	UL Open, 1, 12	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
		Axx580-01-052A-6	NA	NA	52	50.00 HP	41	40.00 HP	R5	UL Open, 1, 12	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
	Axx580-01-062A-6	NA	NA	62	60.00 HP	52	50.00 HP	R5	UL Open, 1, 12	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated	
208-240	ACS880 See Note 2 below	ACS880-01-115A-2	115	40.00 HP	109	40.00 HP	87	30.00 HP	R6	UL Open, 1, 12; IP 20,21,55	28.62 x 9.92 x 14.1	93.1	34.81 x 11.46 x 16.59	95.0	Interpolated
380-415		ACS880-01-145A-2	145	50.00 HP	138	50.00 HP	105	40.00 HP	R6	UL Open, 1, 12; IP 20,21,55	28.62 x 9.92 x 14.1	93.1	34.81 x 11.46 x 16.59	95.0	Interpolated
		ACS880-01-105A-3	105	55.00 kW	100	55.00 kW	87	45.00 kW	R6	UL Open, 1, 12; IP 20,21,55	28.62 x 9.92 x 14.1	93.1	34.81 x 11.46 x 16.59	95.0	Interpolated
380-500		ACS880-01-145A-3	145	75.00 kW	138	75.00 kW	105	55.00 kW	R6	UL Open, 1, 12; IP 20,21,55	28.62 x 9.92 x 14.1	93.1	34.81 x 11.46 x 16.59	95.0	Interpolated
		ACS880-01-096A-5	NA	NA	96	75.00 HP	77	60.00 HP	R6	UL Open, 1, 12; IP 20,21,55	28.62 x 9.92 x 14.1	93.1	34.81 x 11.46 x 16.59	95.0	Interpolated
525-690		ACS880-01-124A-5	NA	NA	124	100.00 HP	96	75.00 HP	R6	UL Open, 1, 12; IP 20,21,55	28.62 x 9.92 x 14.1	93.1	34.81 x 11.46 x 16.59	95.0	Interpolated
		ACS880-01-061A-7	NA	NA	62	60.00 HP	52	50.00 HP	R6	UL Open, 1, 12; IP 20,21,55	28.62 x 9.92 x 14.1	93.1	34.81 x 11.46 x 16.59	95.0	Interpolated
		ACS880-01-084A-7	NA	NA	77	75.00 HP	62	60.00 HP	R6	UL Open, 1, 12; IP 20,21,55	28.62 x 9.92 x 14.1	93.1	34.81 x 11.46 x 16.59	95.0	Interpolated
200-240	For Axx580: xx = CS, CH, CQ, or YK (NEC)	Axx580-01-143A-2	143	50.00 HP	143	50.00 HP	114	40.00 HP	R6	UL Open, 1, 12	28.62 x 9.92 x 14.53	93.5	34.81 x 11.46 x 16.40	95.0	Interpolated
440-480	Axx580-01-124A-4	NA	NA	124	100.00 HP	96	75.00 HP	R6	UL Open, 1, 12	28.62 x 9.92 x 14.53	93.5	34.81 x 11.46 x 16.40	95.0	Interpolated	
200-240	For ACx580: x = S, H, or Q (IEC)	ACx580-01-144A-2	144	37.00 kW	143	37.00 kW	114	30.00 kW	R6	IP 20, 21, 55	28.62 x 9.92 x 14.53	93.5	34.81 x 11.46 x 16.40	95.0	Interpolated
380-480	ACx580-01-145A-4	145	75.00 kW	138	75.00 kW	105	55.00 kW	R6	IP 20, 21, 55	28.62 x 9.92 x 14.53	93.5	34.81 x 11.46 x 16.40	95.0	Interpolated	
208-240	ACS880 See Note 2 below	ACS880-01-170A-2	170	60.00 HP	162	60	145	50.00 HP	R7	UL Open, 1, 12; IP 20,21,55	34.66 x 11.18 x 14.4	117.0	40.87 x 12.67 x 16.65	119.1	Interpolated
380-415		ACS880-01-206A-2	206	75.00 HP	196	75	169	60.00 HP	R7	UL Open, 1, 12; IP 20,21,55	34.66 x 11.18 x 14.4	117.0	40.87 x 12.67 x 16.65	119.1	Interpolated
		ACS880-01-169A-3	169	90.00 kW	161	90.00 kW	145	75.00 kW	R7	UL Open, 1, 12; IP 20,21,55	34.66 x 11.18 x 14.4	117.0	40.87 x 12.67 x 16.65	119.1	Interpolated
380-500		ACS880-01-206A-3	206	110.00 kW	196	110.00 kW	169	90.00 kW	R7	UL Open, 1, 12; IP 20,21,55	34.66 x 11.18 x 14.4	117.0	40.87 x 12.67 x 16.65	119.1	Interpolated
		ACS880-01-156A-5	NA	NA	156	125.00 HP	124	100.00 HP	R7	UL Open, 1, 12; IP 20,21,55	34.66 x 11.18 x 14.4	117.0	40.87 x 12.67 x 16.65	119.1	Interpolated
525-690		ACS880-01-180A-5	NA	NA	180	150.00 HP	156	125.00 HP	R7	UL Open, 1, 12; IP 20,21,55	34.66 x 11.18 x 14.4	117.0	40.87 x 12.67 x 16.65	119.1	Interpolated
		ACS880-01-098A-7	NA	NA	99	100.00 HP	77	75.00 HP	R7	UL Open, 1, 12; IP 20,21,55	34.66 x 11.18 x 14.4	117.0	40.87 x 12.67 x 16.65	119.1	Interpolated
		ACS880-01-119A-7	NA	NA	125	125.00 HP	99	100.00 HP	R7	UL Open, 1, 12; IP 20,21,55	34.66 x 11.18 x 14.4	117.0	40.87 x 12.67 x 16.65	119.1	Interpolated
200-240	For ACx580: x = S, H, or Q (IEC)	ACx580-01-171A-2	171	45.00 kW	169	45.00 kW	143	37.00 kW	R7	IP 20, 21, 55	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
380-480		ACx580-01-213A-2	213	55.00 kW	211	55.00 kW	169	45.00 kW	R7	IP 20, 21, 55	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
		ACx580-01-169A-4	169	90.00 kW	161	90.00 kW	145	75.00 kW	R7	IP 20, 21, 55	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
575-600		ACx580-01-206A-4	206	110.00 kW	196	110.00 kW	169	90.00 kW	R7	IP 20, 21, 55	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
		ACx580-01-099A-6	NA	NA	99	75.00 kW	77	55.00 kW	R7	IP 20, 21, 55	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
		ACx580-01-125A-6	NA	NA	125	90.00 kW	99	75.00 kW	R7	IP 20, 21, 55	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
200-240	For Axx580: xx = CS, CH, CQ, or YK (NEC)	Axx580-01-169A-2	169	60.00 HP	169	60.00 HP	143	50.00 HP	R7	UL Open, 1, 12	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
440-480		Axx580-01-211A-2	211	75.00 HP	211	75.00 HP	169	60.00 HP	R7	UL Open, 1, 12	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
		Axx580-01-156A-4	NA	NA	156	125.00 HP	124	100.00 HP	R7	UL Open, 1, 12	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
575-600		Axx580-01-180A-4	NA	NA	180	150.00 HP	156	125.00 HP	R7	UL Open, 1, 12	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
		Axx580-01-099A-6	NA	NA	99	100.00 HP	77	75.00 HP	R7	UL Open, 1, 12	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
208-240	ACS880 See Note 2 below	ACS880-01-274A-2	274	100.00 HP	260	100.00 HP	213	75.00 HP	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 15.21	150.0	44.23 x 13.8 x 17.8	163.2	Interpolated
380-415		ACS880-01-246A-3	246	132.00 kW	234	132.00 kW	206	110.00 kW	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 15.21	150.0	44.23 x 13.8 x 17.8	163.2	Interpolated
		ACS880-01-293A-3	293	160.00 kW	278	160.00 kW	246	132.00 kW	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 15.21	150.0	44.23 x 13.8 x 17.8	163.2	Interpolated
380-500		ACS880-01-240A-5	NA	NA	240	200.00 HP	180	150.00 HP	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 15.21	150.0	44.23 x 13.8 x 17.8	163.2	Interpolated
		ACS880-01-260A-5	NA	NA	260	200.00 HP	240	150.00 HP	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 15.21	150.0	44.23 x 13.8 x 17.8	163.2	Interpolated
525-690		ACS880-01-142A-7	NA	NA	144	150.00 HP	125	125.00 HP	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 15.21	150.0	44.23 x 13.8 x 17.8	163.2	Interpolated
		ACS880-01-174A-7	NA	NA	180	200.00 HP	144	150.00 HP	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 15.21	150.0	44.23 x 13.8 x 17.8	163.2	Interpolated

Notes: 1. ABB is the manufacturer for all units.

2. For ACS880-01-xxxx-2,-5,-7 NEC and IEC ratings apply. Table shows only NEC rating. ACS880-01-xxxx-3 is only available as an IEC rating.

3. All units were tested in rigid and isolated mounting configs to SDS=2.0 at z/h=1.0, and SDS=2.5 at z/h=0.0.

4. When an Optional Subcomponent is present, its Type Code is appended to the model number

5. AYK580-01 units are identical to ACx580-01 units other than software and branding

Table 3 - Certified Subcomponents - Drives - 580-01 & 880-01 - Wall Mounted (Cont.)

System Voltage [V]	Model ⁵	ABB Model Number	Ratings						Frame Size	Available Enclosure Types	Type 1		Type 12		UUT
			Normal Duty		Light Duty		Heavy Duty				Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	
			Current [A]	kW / HP	Current [A]	kW / HP	Current [A]	kW / HP							
200-240	For ACx580: x = S, H, or Q (IEC)	ACx580-01-276A-2	276	75.00 kW	273	75.00 kW	211	55.00 kW	R8	IP 20, 21, 55	38.00 x 11.81 x 15.47	152.2	44.23 x 13.80 x 17.77	170.0	Interpolated
380-480		ACx580-01-246A-4	246	132.00 kW	234	132.00 kW	206	110.00 kW	R8	IP 20, 21, 55	38.00 x 11.81 x 15.47	152.2	44.23 x 13.80 x 17.77	170.0	Interpolated
		ACx580-01-293A-4	293	160.00 kW	278	160.00 kW	246	132.00 kW	R8	IP 20, 21, 55	38.00 x 11.81 x 15.47	152.2	44.23 x 13.80 x 17.77	170.0	Interpolated
575-600		ACx580-01-144A-6	NA	NA	144	110.00 kW	125	90.00 kW	R8	IP 20, 21, 55	38.00 x 11.81 x 15.47	152.2	44.23 x 13.80 x 17.77	170.0	Interpolated
200-240	For Axx580: xx = CS, CH, CQ, or YK (NEC)	Axx580-01-273A-2	273	100.00 HP	273	100.00 HP	211	75.00 HP	R8	UL Open, 1, 12	38.00 x 11.81 x 15.47	152.2	44.23 x 13.80 x 17.77	170.0	Interpolated
440-480		Axx580-01-240A-4	NA	NA	240	200.00 HP	180	150.00 HP	R8	UL Open, 1, 12	38.00 x 11.81 x 15.47	152.2	44.23 x 13.80 x 17.77	170.0	Interpolated
		ACH580-01-240A-4	NA	NA	240	200.00 HP	180	150.00 HP	R8	UL Open, 1, 12	-	-	44.23 x 13.80 x 17.77	170.0	UUT-11 ⁶
575-600		Axx580-01-260A-4	NA	NA	260	200.00 HP	240	150.00 HP	R8	UL Open, 1, 12	38.00 x 11.81 x 15.47	152.2	44.23 x 13.80 x 17.77	170.0	Interpolated
380-480	For ACx580: x = S, H, or Q (IEC)	ACx580-01-363A-4	363	200.00 kW	345	200.00 kW	293	160.00 kW	R9	IP 20, 21, 55	37.60 x 14.96 x 16.46	214.0	46.75 x 16.95 x 18.60	224.9	Interpolated
		ACx580-01-430A-4	430	250.00 kW	400	200.00 kW	363	200.00 kW	R9	IP 20, 21, 55	37.60 x 14.96 x 16.46	214.0	46.75 x 16.95 x 18.60	224.9	Interpolated
575-600		ACx580-01-192A-6	NA	NA	192	150.00 kW	144	110.00 kW	R9	IP 20, 21, 55	37.60 x 14.96 x 16.46	214.0	46.75 x 16.95 x 18.60	224.9	Interpolated
		ACx580-01-242A-6	NA	NA	242	180.00 kW	192	150.00 kW	R9	IP 20, 21, 55	37.60 x 14.96 x 16.46	214.0	46.75 x 16.95 x 18.60	224.9	Interpolated
		ACx580-01-271A-6	NA	NA	257	180.00 kW	210	150.00 kW	R9	IP 20, 21, 55	37.60 x 14.96 x 16.46	214.0	46.75 x 16.95 x 18.60	224.9	Interpolated
200-240	For Axx580: xx = CS, CH, CQ, or YK (NEC)	Axx580-01-192A-6	NA	NA	192	200.00 HP	144	150.00 HP	R9	UL Open, 1, 12	37.60 x 14.96 x 16.46	214.0	46.75 x 16.95 x 18.60	224.9	Interpolated
		Axx580-01-242A-6	NA	NA	242	250.00 HP	192	200.00 HP	R9	UL Open, 1, 12	37.60 x 14.96 x 16.46	214.0	46.75 x 16.95 x 18.60	224.9	Interpolated
		Axx580-01-271A-6	NA	NA	271	250.00 HP	210	200.00 HP	R9	UL Open, 1, 12	37.60 x 14.96 x 16.46	214.0	46.75 x 16.95 x 18.60	224.9	Interpolated
		ACx580-01-343A-2	NA	NA	343	125.00 HP	273	100.00 HP	R9	UL Open, 1, 12	37.60 x 14.96 x 16.46	214.0	46.75 x 16.95 x 18.60	224.9	Interpolated
440-480	For Axx580: xx = CS, CH, CQ, or YK (NEC)	ACx580-01-396A-2	NA	NA	396	150.00 HP	340	125.00 HP	R9	UL Open, 1, 12	37.60 x 14.96 x 16.46	214.0	46.75 x 16.95 x 18.60	224.9	Interpolated
		Axx580-01-302A-4	NA	NA	302	250.00 HP	260	200.00 HP	R9	UL Open, 1, 12	37.60 x 14.96 x 16.46	214.0	46.75 x 16.95 x 18.60	224.9	Interpolated
		Axx580-01-361A-4	NA	NA	361	300.00 HP	302	250.00 HP	R9	UL Open, 1, 12	37.60 x 14.96 x 16.46	214.0	46.75 x 16.95 x 18.60	224.9	Interpolated
		Axx580-01-414A-4	NA	NA	414	350.00 HP	361	300.00 HP	R9	UL Open, 1, 12	37.60 x 14.96 x 16.46	214.0	46.75 x 16.95 x 18.60	224.9	Interpolated
	ACH580-01-414A-4	NA	NA	414	350.00 HP	361	300.00 HP	R9	UL Open, 1, 12	-	-	39.0 ⁽⁷⁾ x 15.0 x 19.0	216.0	UUT-02	
380-415	ACS880 See Note 2 below	ACS880-01-363A-3	363	200.00 kW	345	200.00 kW	293	160.00 kW	R9	UL Open, 1, 12; IP 20,21,55	37.60 x 14.96 x 16.27	209.5	46.75 x 16.95 x 18.78	224.9	Interpolated
		ACS880-01-430A-3	430	250.00 kW	400	250.00 kW	363	200.00 kW	R9	UL Open, 1, 12; IP 20,21,55	37.60 x 14.96 x 16.27	209.5	46.75 x 16.95 x 18.78	224.9	Interpolated
525-690		ACS880-01-210A-7	NA	NA	242	250.00 HP	192	200.00 HP	R9	UL Open, 1, 12; IP 20,21,55	37.60 x 14.96 x 16.27	209.5	46.75 x 16.95 x 18.78	224.9	Interpolated
		ACS880-01-271A-7	NA	NA	271	250.00 HP	242	250.00 HP	R9	UL Open, 1, 12; IP 20,21,55	37.60 x 14.96 x 16.27	209.5	46.75 x 16.95 x 18.78	224.9	Interpolated
		ACS880-01-302A-5	NA	NA	302	250.00 HP	360	200.00 HP	R9	UL Open, 1, 12; IP 20,21,55	37.60 x 14.96 x 16.27	209.5	46.75 x 16.95 x 18.78	224.9	Interpolated
		ACS880-01-361A-5	NA	NA	361	300.00 HP	302	250.00 HP	R9	UL Open, 1, 12; IP 20,21,55	37.60 x 14.96 x 16.27	209.5	46.75 x 16.95 x 18.78	224.9	Interpolated
		ACS880-01-414A-5	NA	NA	414	350.00 kW	361	300.00 HP	R9	UL Open, 1, 12; IP 20,21,55	37.60 x 14.96 x 16.27	209.5	46.75 x 16.95 x 18.78	224.9	Interpolated
		ACS880-01-414A-5	NA	NA	414	350.00 kW	361	300.00 HP	R9	UL Open, 1, 12; IP 20,21,55	-	-	37.0 ⁽⁷⁾ x 15.0 x 19.0	225	UUT-15

- Notes:
1. ABB is the manufacturer for all units.
 2. For ACS880-01-xxxx-2, -5, -7 both NEC and IEC ratings apply. Table shows only NEC rating. ACS880-01-xxxx-3 is only available as IEC rating.
 3. All units were tested in rigid and isolated mounting configurations to SDS=2.0 at z/h=1.0, and SDS=2.5 at z/h=0.0.
 4. Type Code appended to model number when an Optional Subcomponent is used
 5. AYK580-01 units are identical to ACx580-01 units other than software and branding
 6. Listed drive model was tested as a subcomponent within listed UUT
 7. UUT height measurement does not include drip hood

Table 4 - Certified Subcomponents - Drives - 580-01 & 880-01 - Wall Mount Around Perimeter Using Flange Kit

System Voltage [V]	Model ⁶	ABB Model Number	Normal Duty Ratings		Light Duty Ratings		Heavy Duty Ratings		Frame Size	Available Enclosure Types	Type 1		Type 12		UUT
			Current [A]	kW / HP	Current [A]	kW / HP	Current [A]	kW / HP			Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	
200-240	For ACx580: x = S, H, or Q (IEC)	ACx580-01-04A7-2	4.7	0.75 kW	4.6	0.75 kW	3.5	0.75 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-06A7-2	6.7	1.10 kW	6.6	1.10 kW	4.6	0.75 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-07A6-2	7.6	1.50 kW	7.5	1.50 kW	6.6	1.10 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-012A-2	12.0	2.20 kW	11.8	2.20 kW	7.5	1.50 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-018A-2	16.9	4.00 kW	16.7	4.00 kW	10.6	2.20 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-02A7-4	2.6	0.75 kW	2.5	0.75 kW	1.8	0.55 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-03A4-4	3.3	1.10 kW	3.1	1.10 kW	2.6	0.75 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-04A1-4	4	1.50 kW	3.8	1.50 kW	3.3	1.10 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-05A7-4	5.6	2.20 kW	5.3	2.20 kW	4	1.50 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-07A3-4	7.2	3.00 kW	6.8	3.00 kW	5.6	2.20 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
380-480	For ACx580: x = S, H, or Q (IEC)	ACx580-01-09A5-4	9.4	4.00 kW	8.9	4.00 kW	7.2	3.00 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-12A7-4	12.6	5.50 kW	12	5.50 kW	9.4	4.00 kW	R1	IP 20, 21, 55	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-04A6-2	4.6	1.00 HP	4.6	1.00 HP	3.5	0.80 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-06A6-2	6.6	1.50 HP	6.6	1.50 HP	4.6	1.00 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-07A5-2	7.5	2.00 HP	7.5	2.00 HP	6.6	1.50 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-10A6-2	10.6	3.00 HP	10.6	3.00 HP	7.5	2.00 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-017A-2	16.7	5.00 HP	16.7	5.00 HP	10.6	3.00 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-02A1-4	NA	NA	2.1	1.00 HP	1.6	0.75 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-03A0-4	NA	NA	3	1.50 HP	2.1	1.00 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-03A5-4	NA	NA	3.5	2.00 HP	3	1.50 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
440-480	For Axx580: xx = CS, CH, CQ, or YK (NEC)	Axx580-01-04A8-4	NA	NA	4.8	3.00 HP	3.4	2.00 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-06A0-4	NA	NA	6	3.00 HP	4	3.00 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-07A6-4	NA	NA	7.6	5.00 HP	4.8	3.00 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		Axx580-01-012A-4	NA	NA	12	7.50 HP	7.6	5.00 HP	R1	UL Open, 1, 12	14.69 x 4.92 x 8.78	10.2	17.78 x 5.04 x 9.17	10.6	Extrapolated
		ACx580-01-025A-2	24.5	5.50 kW	24.2	5.50 kW	16.7	4.00 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated
		ACx580-01-032A-2	31.2	7.50 kW	30.8	7.50 kW	24.2	5.50 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated
		ACx580-01-018A-4	17	7.50 kW	16.2	7.50 kW	12.6	5.50 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated
		ACx580-01-026A-4	25	11.00 kW	23.8	11.00 kW	17	7.50 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated
		ACx580-01-02A7-6	NA	NA	2.7	1.50 kW	2.4	1.10 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated
		ACx580-01-03A9-6	NA	NA	3.9	2.20 kW	2.7	1.50 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated
200-240	For ACx580: x = S, H, or Q (IEC)	ACx580-01-06A1-6	NA	NA	6.1	4.00 kW	3.9	2.20 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated
		ACx580-01-09A0-6	NA	NA	9	5.50 kW	6.1	4.00 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated
		ACx580-01-11A0-6	NA	NA	11	7.50 kW	9	5.50 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated
		ACx580-01-017A-6	NA	NA	17	11.00 kW	11	7.50 kW	R2	IP 20, 21, 55	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated
		Axx580-01-024A-2	24.2	7.50 HP	24.2	7.50 HP	16.7	5.00 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated
		Axx580-01-031A-2	31	10.00 HP	31	10.00 HP	24.2	7.50 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated
		Axx580-01-014A-4	NA	NA	14	10.00 HP	11	7.50 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated
		Axx580-01-023A-4	NA	NA	23	15.00 HP	15	10.00 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated
		Axx580-01-02A7-6	NA	NA	2.7	2.00 HP	2.4	1.50 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated
		Axx580-01-03A9-6	NA	NA	3.9	3.00 HP	2.7	2.00 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated
440-480	For Axx580: xx = CS, CH, CQ, or YK (NEC)	Axx580-01-06A1-6	NA	NA	6.1	5.00 HP	3.9	3.00 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated
		Axx580-01-09A0-6	NA	NA	9	7.50 HP	6.1	5.00 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated
		Axx580-01-011A-6	NA	NA	11	10.00 HP	9	7.50 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated
		Axx580-01-017A-6	NA	NA	17	15.00 HP	11	10.00 HP	R2	UL Open, 1, 12	18.62 x 4.94 x 9.00	14.6	21.49 x 5.06 x 9.41	15.0	Extrapolated

- Notes:
1. ABB is the manufacturer for all units.
 2. For ACS880-01-xxxx-2, -5, -7 both NEC and IEC ratings apply. Table shows only NEC rating. ACS880-01-xxxx-3 is only available as an IEC rating.
 3. Flange Kit options are available for all units, Type Code +C135
 4. All units were tested in rigid and isolated mounting configurations to S_{DS}=2.0 at z/h=1.0, and S_{DS}=2.5 at z/h=0.0.
 5. When an Optional Subcomponent is present, its Type Code is appended to the model number
 6. AYK580-01 units are identical to ACx580-01 units other than software and branding

Table 4 - Certified Subcomponents - Drives - 580-01 & 880-01 - Wall Mount Around Perimeter Using Flange Kit (Cont.)

System Voltage [V]	Model ⁶	ABB Model Number	Normal Duty Ratings		Light Duty Ratings		Heavy Duty Ratings		Frame Size	Available Enclosure Types	Type 1		Type 12		UUT
			Current [A]	kW / HP	Current [A]	kW / HP	Current [A]	kW / HP			Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	
208-240	ACS880 See Note 2 below	ACS880-01-04A6-2	4.6	1.00 HP	4.4	1.00 HP	3.7	0.75 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Extrapolated
		ACS880-01-06A6-2	6.6	1.50 HP	6.3	1.50 HP	4.6	1.00 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Extrapolated
		ACS880-01-07A5-2	7.5	2.00 HP	7.1	2.00 HP	6.6	1.50 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Extrapolated
		ACS880-01-10A6-2	10.6	3.00 HP	10.1	3.00 HP	7.5	2.00 kW	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Extrapolated
380-415		ACS880-01-02A4-3	2.4	0.75 kW	2.3	0.75 kW	1.8	0.55 kW	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Extrapolated
		ACS880-01-03A3-3	3.3	1.10 kW	3.1	1.10 kW	2.4	0.75 kW	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Extrapolated
		ACS880-01-04A0-3	4	1.50 kW	3.8	1.50 kW	3.3	1.10 kW	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Extrapolated
		ACS880-01-05A6-3	5.6	2.20 kW	5.3	2.20 kW	4	1.50 kW	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Extrapolated
		ACS880-01-07A2-3	8	3.00 kW	7.6	3.00 kW	5.6	2.20 kW	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Extrapolated
		ACS880-01-09A4-3	10	4.00 kW	9.5	4.00 kW	8	3.00 kW	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Extrapolated
380-500		ACS880-01-12A6-3	12.9	5.50 kW	12	5.50 kW	10	4.00 kW	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Extrapolated
		ACS880-01-02A1-5	NA	NA	2.1	1.00 HP	1.7	0.75 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Extrapolated
		ACS880-01-03A0-5	NA	NA	3	1.50 HP	2.1	1.00 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Extrapolated
		ACS880-01-03A4-5	NA	NA	3.4	2.00 HP	3	1.50 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Extrapolated
		ACS880-01-04A8-5	NA	NA	4.8	3.00 HP	3.4	2.00 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Extrapolated
		ACS880-01-05A2-5	NA	NA	5.2	3.00 HP	4.8	2.00 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Extrapolated
208-240		ACS880-01-07A6-5	NA	NA	7.6	5.00 HP	5.2	3.00 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Extrapolated
		ACS880-01-11A0-5	NA	NA	11	7.50 HP	7.6	5.00 HP	R1	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 8.91	15.5	17.72 x 6.38 x 11.50	18.0	Extrapolated
380-415		ACS880-01-16A8-2	16.8	5.00 HP	16	5.00 HP	10.6	3.00 HP	R2	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 9.82	19.0	17.72 x 6.38 x 12.40	21.0	Extrapolated
		ACS880-01-24A3-2	24.3	7.50 HP	23.1	7.50 HP	16.8	5.00 HP	R2	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 9.82	19.0	17.72 x 6.38 x 12.40	21.0	Extrapolated
380-500		ACS880-01-017A-3	17	7.50 kW	16	7.50 kW	12.6	5.50 kW	R2	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 9.82	19.0	17.72 x 6.38 x 12.40	21.0	Extrapolated
		ACS880-01-025A-3	25	11.00 kW	24	11.00 kW	17	7.50 kW	R2	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 9.82	19.0	17.72 x 6.38 x 12.40	21.0	Extrapolated
208-240		ACS880-01-014A-5	NA	NA	14	10.00 HP	11	7.50 HP	R2	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 9.82	19.0	17.72 x 6.38 x 12.40	21.0	Extrapolated
		ACS880-01-021A-5	NA	NA	21	15.00 HP	14	10.00 HP	R2	UL Open, 1, 12; IP 20,21,55	16.11 x 6.10 x 9.82	19.0	17.72 x 6.38 x 12.40	21.0	Extrapolated
380-415		ACS880-01-031A-2	31	10.00 HP	29.3	10.00 HP	24.3	7.50 HP	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Extrapolated
		ACS880-01-032A-3	32	15.00 kW	30	15.00 kW	25	11.00 kW	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Extrapolated
380-500		ACS880-01-038A-3	38	18.50 kW	36	18.50 kW	32	15.00 kW	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Extrapolated
		ACS880-01-027A-5	NA	NA	27	20.00 HP	21	15.00 HP	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Extrapolated
525-690		ACS880-01-034A-5	NA	NA	34	25.00 HP	27	20.00 HP	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Extrapolated
		ACS880-01-07A4-7	NA	NA	7	5.00 HP	5.6	3.00 HP	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Extrapolated
		ACS880-01-09A9-7	NA	NA	9.4	7.50 HP	7.4	5.00 HP	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Extrapolated
		ACS880-01-14A3-7	NA	NA	13.6	10.00 HP	9.9	7.50 HP	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Extrapolated
		ACS880-01-019A-7	NA	NA	18	15.00 HP	14.3	10.00 HP	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Extrapolated
		ACS880-01-023A-7	NA	NA	22	20.00 HP	19	15.00 HP	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Extrapolated
200-240		ACS880-01-027A-7	NA	NA	27	25.00 HP	23	20.00 HP	R3	UL Open, 1, 12; IP 20,21,55	18.71 x 6.8 x 10.28	24.0	20.7 x 7.09 x 12.87	26.5	Extrapolated
		Axx580-01-046A-2	46.2	15.00 HP	46.2	15.00 HP	30.8	10.00 HP	R3	UL Open, 1, 12	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Extrapolated
440-480		Axx580-01-059A-2	59.4	20.00 HP	59.4	20.00 HP	46.2	15.00 HP	R3	UL Open, 1, 12	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Extrapolated
		Axx580-01-027A-4	NA	NA	27	20.00 HP	21	15.00 HP	R3	UL Open, 1, 12	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Extrapolated
		Axx580-01-034A-4	NA	NA	34	25.00 HP	27	20.00 HP	R3	UL Open, 1, 12	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Extrapolated
		Axx580-01-044A-4	NA	NA	44	30.00 HP	34	25.00 HP	R3	UL Open, 1, 12	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Extrapolated
575-600	Axx580-01-022A-6	NA	NA	22	20.00 HP	17	15.00 HP	R3	UL Open, 1, 12	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Extrapolated	
	Axx580-01-027A-6	NA	NA	27	25.00 HP	22	20.00 HP	R3	UL Open, 1, 12	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Extrapolated	
	Axx580-01-032A-6	NA	NA	32	30.00 HP	27	25.00 HP	R3	UL Open, 1, 12	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Extrapolated	

- Notes:
1. ABB is the manufacturer for all units.
 2. For ACS880-01-xxxx-2, -5, -7 both NEC and IEC ratings apply. Table shows only NEC rating. ACS880-01-xxxx-3 is only available as an IEC rating.
 3. Flange Kit options are available for all units, Type Code +C135
 4. All units were tested in rigid and isolated mounting configurations to S_{DS}=2.0 at z/h=1.0, and S_{DS}=2.5 at z/h=0.0.
 5. When an Optional Subcomponent is present, its Type Code is appended to the model number
 6. AYK580-01 units are identical to ACx580-01 units other than software and branding

Table 4 - Certified Subcomponents - Drives - 580-01 & 880-01 - Wall Mount Around Perimeter Using Flange Kit (Cont.)

System Voltage [V]	Model ⁶	ABB Model Number	Normal Duty Ratings		Light Duty Ratings		Heavy Duty Ratings		Frame Size	Available Enclosure Types	Type 1		Type 12		UUT	
			Current [A]	kW / HP	Current [A]	kW / HP	Current [A]	kW / HP			Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]		
200-240	For ACx580: x = S, H, or Q (IEC)	ACx580-01-047A-2	46.7	11.00 kW	46.2	11.00 kW	30.8	7.50 kW	R3	IP 20, 21, 55	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Extrapolated	
		ACx580-01-060A-2	60.0	15.00 kW	59.4	15.00 kW	46.2	11.00 kW	R3	IP 20, 21, 55	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Extrapolated	
380-480		ACx580-01-033A-4	32	15.00 kW	30.4	15.00 kW	24.6	11.00 kW	R3	IP 20, 21, 55	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Extrapolated	
		ACx580-01-039A-4	38	18.50 kW	36.1	18.50 kW	31.6	15.00 kW	R3	IP 20, 21, 55	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Extrapolated	
		ACx580-01-046A-4	45	22.00 kW	42.8	22.00 kW	37.7	18.50 kW	R3	IP 20, 21, 55	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Extrapolated	
		ACx580-01-022A-6	NA	NA	22	15.00 kW	17	11.00 kW	R3	IP 20, 21, 55	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Extrapolated	
575-600		ACx580-01-027A-6	NA	NA	27	18.50 kW	22	15.00 kW	R3	IP 20, 21, 55	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Extrapolated	
		ACx580-01-032A-6	NA	NA	32	22.00 kW	27	19.00 kW	R3	IP 20, 21, 55	19.29 x 7.99 x 9.02	26.1	20.93 x 8.16 x 9.33	28.7	Extrapolated	
208-240	ACS880 See Note 2 below	ACS880-01-046A-2	46	15.00 HP	44	15.00 HP	38	10.00 HP	R4	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	41.1	28.93 x 9.30 x 13.54	42.2	Extrapolated	
		ACS880-01-061A-2	61	20.00 HP	58	20.00 HP	45	15.00 HP	R4	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	41.1	28.93 x 9.30 x 13.54	42.2	Extrapolated	
380-415		ACS880-01-045A-3	45	22.00 kW	43	22.00 kW	38	18.50 kW	R4	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	41.1	28.93 x 9.30 x 13.54	42.2	Extrapolated	
		ACS880-01-061A-3	61	30.00 kW	58	30.00 kW	45	22.00 kW	R4	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	41.1	28.93 x 9.30 x 13.54	42.2	Extrapolated	
380-500		ACS880-01-040A-5	NA	NA	40	30.00 HP	34	25.00 HP	R4	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	41.1	28.93 x 9.30 x 13.54	42.2	Extrapolated	
		ACS880-01-052A-5	NA	NA	52	40.00 HP	40	30.00 HP	R4	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	41.1	28.93 x 9.30 x 13.54	42.2	Extrapolated	
200-240	For ACx580: x = S, H, or Q (IEC)	ACx580-01-075A-2	NA	NA	74.8	25.00 HP	59.4	20.00 HP	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Extrapolated	
		ACx580-01-090A-2	NA	NA	90	30.00 HP	75	25.00 HP	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Extrapolated	
		ACx580-01-076A-2	NA	NA	75	18.5 kW	59	15.00 kW	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Extrapolated	
		ACx580-01-091A-2	NA	NA	88	22.0 Kw	75	18.5 kW	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Extrapolated	
380-480		ACx580-01-076A-2	76	18.50 kW	74.8	18.50 kW	59.4	15.00 kW	R4	IP 20, 21, 55	25.04 x 7.99 x 10.13	41.9	27.03 x 8.59 x 10.43	44.1	Extrapolated	
		ACx580-01-062A-4	62	30.00 kW	58	30.00 kW	45	22.00 kW	R4	IP 20, 21, 55	25.04 x 7.99 x 10.13	41.9	27.03 x 8.59 x 10.43	44.1	Extrapolated	
	ACx580-01-073A-4	73	37.00 kW	68	37.00 kW	61	30.00 kW	R4	IP 20, 21, 55	25.04 x 7.99 x 10.13	41.9	27.03 x 8.59 x 10.43	44.1	Extrapolated		
200-240	For Axx580: xx = CS, CH, CQ, or YK (NEC)	Axx580-01-075A-2	74.8	25.00 HP	74.8	25.00 HP	59.4	20.00 HP	R4	UL Open, 1, 12	25.04 x 7.99 x 10.13	41.9	27.03 x 8.59 x 10.43	44.1	Extrapolated	
		Axx580-01-052A-4	NA	NA	52	40.00 HP	40	30.00 HP	R4	UL Open, 1, 12	25.04 x 7.99 x 10.13	41.9	27.03 x 8.59 x 10.43	44.1	Extrapolated	
		Axx580-01-065A-4	NA	NA	65	50.00 HP	52	40.00 HP	R4	UL Open, 1, 12	25.04 x 7.99 x 10.13	41.9	27.03 x 8.59 x 10.43	44.1	Extrapolated	
		Axx580-01-077A-4	NA	NA	77	60.00 HP	65	50.00 HP	R4	UL Open, 1, 12	25.04 x 7.99 x 10.13	41.9	27.03 x 8.59 x 10.43	44.1	Extrapolated	
440-480		Axx580-01-052A-4	NA	NA	52	40.00 HP	40	30.00 HP	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Extrapolated	
		Axx580-01-065A-4	NA	NA	65	50.00 HP	52	40.00 HP	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Extrapolated	
		Axx580-01-077A-4	NA	NA	77	60.00 HP	65	50.00 HP	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Extrapolated	
		ACx580-01-062A-4	NA	NA	58	30.00 kW	45	22.00 kW	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Extrapolated	
		ACx580-01-073A-4	NA	NA	68	37.00 kW	61	30.00 kW	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Extrapolated	
	ACx580-01-089A-4	NA	NA	83	45.00 kW	72	37.00 kW	R4 v2	UL Open, 1, 12; IP 20,21,55	22.85 x 7.99 x 10.8	44.1	28.93 x 9.30 x 13.54	46.3	Extrapolated		
208-240	ACS880 See Note 2 below	ACS880-01-075A-2	75	25.00 HP	71	25.00 HP	61	20.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Extrapolated	
		ACS880-01-087A-2	87	30.00 HP	83	30.00 HP	72	25.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Extrapolated	
380-415		ACS880-01-072A-3	72	37.00 kW	68	37.00 kW	61	30.00 kW	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Extrapolated	
		ACS880-01-087A-3	87	45.00 kW	83	45.00 kW	72	37.00 kW	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Extrapolated	
380-500		ACS880-01-065A-5	NA	NA	65	50.00 HP	52	40.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Extrapolated	
		ACS880-01-077A-5	NA	NA	77	60.00 HP	65	50.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Extrapolated	
		ACS880-01-07A3-7	NA	NA	9	7.50 HP	6.1	5.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Extrapolated	
		ACS880-01-09A8-7	NA	NA	11	10.00 HP	9	7.50 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Extrapolated	
		ACS880-01-14A2-7	NA	NA	17	15.00 HP	11	10.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Extrapolated	
525-690		ACS880-01-018A-7	NA	NA	22	20.00 HP	17	15.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Extrapolated	
		ACS880-01-022A-7	NA	NA	27	25.00 HP	22	20.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Extrapolated	
		ACS880-01-026A-7	NA	NA	32	30.00 HP	27	25.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Extrapolated	
		ACS880-01-035A-7	NA	NA	41	40.00 HP	32	30.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Extrapolated	
		ACS880-01-042A-7	NA	NA	52	50.00 HP	41	40.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Extrapolated	
		ACS880-01-049A-7	NA	NA	52	50.00 HP	41	40.00 HP	R5	UL Open, 1, 12; IP 20,21,55	28.82 x 7.99 x 10.79	50.3	34.89 x 9.30 x 13.54	52.0	Extrapolated	
200-240		For ACx580: x = S, H, or Q (IEC)	ACx580-01-089A-2	89	22.00 kW	88	22.00 kW	74.8	18.50 kW	R5	IP 20, 21, 55	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
			ACx580-01-115A-2	115	30.00 kW	114	30.00 kW	88	22.00 kW	R5	IP 20, 21, 55	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
380-480	ACx580-01-088A-4		88	45.00 kW	83	45.00 kW	72	37.00 kW	R5	IP 20, 21, 55	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated	
	ACx580-01-106A-4		106	55.00 kW	100	55.00 kW	87	45.00 kW	R5	IP 20, 21, 55	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated	
	ACx580-01-041A-6		NA	NA	41	30.00 kW	32	22.00 kW	R5	IP 20, 21, 55	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated	
575-600	ACx580-01-052A-6		NA	NA	52	37.00 kW	41	30.00 kW	R5	IP 20, 21, 55	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated	
	ACx580-01-062A-6	NA	NA	62	45.00 kW	52	37.00 kW	R5	IP 20, 21, 55	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated		
	ACx580-01-077A-6	NA	NA	77	55.00 kW	62	45.00 kW	R5	IP 20, 21, 55	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated		

Notes: 1. ABB is the manufacturer for all units. 2. For ACS880-01-xxxx-2, -5, -7 both NEC and IEC ratings apply. Table shows only NEC rating. ACS880-01-xxxx-3 is only available as an IEC rating. 3. Flange Kit options are available for all units, Type Code +C135. 4. All units tested in rigid & isolated mounting configurations to S_{DS}=2.0,z/h=1.0, & S_{DS}=2.5,z/h=0.0. 5. When an Optional Subcomponent is present, its Type Code is appended to the model number. 6. AYK580-01 units are identical to ACx580-01 units other than software and branding. Page 18 of 106

Table 4 - Certified Subcomponents - Drives - 580-01 & 880-01 - Wall Mount Around Perimeter Using Flange Kit (Cont.)

System Voltage [V]	Model ⁶	ABB Model Number	Normal Duty Ratings		Light Duty Ratings		Heavy Duty Ratings		Frame Size	Available Enclosure Types	Type 1		Type 12		UUT
			Current [A]	kW / HP	Current [A]	kW / HP	Current [A]	kW / HP			Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	
200-240	For Axx580: xx = CS, CH, CQ, or YK (NEC)	Axx580-01-088A-2	88	30.00 HP	88	30.00 HP	74.8	25.00 HP	R5	UL Open, 1, 12	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
		Axx580-01-114A-2	114	40.00 HP	114	40.00 HP	88	30.00 HP	R5	UL Open, 1, 12	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
440-480		Axx580-01-078A-4	NA	NA	77	60.00 HP	65	50.00 HP	R5	UL Open, 1, 12	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
		Axx580-01-096A-4	NA	NA	96	75.00 HP	77	60.00 HP	R5	UL Open, 1, 12	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
		ACH580-01-096A-4	NA	NA	96	75.00 HP	77	60.00 HP	R5	UL Open, 1, 12	25.0 x 8.0 x 12.0	59.0	-	-	UUT-12
575-600		Axx580-01-041A-6	NA	NA	41	40.00 HP	32	30.00 HP	R5	UL Open, 1, 12	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
		Axx580-01-052A-6	NA	NA	52	50.00 HP	41	40.00 HP	R5	UL Open, 1, 12	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
		Axx580-01-062A-6	NA	NA	62	60.00 HP	52	50.00 HP	R5	UL Open, 1, 12	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated
	Axx580-01-077A-6	NA	NA	62	60.00 HP	52	50.00 HP	R5	UL Open, 1, 12	28.83 x 7.99 x 11.61	62.4	32.01 x 7.99 x 12.60	64.0	Interpolated	
208-240	ACS880 See Note 2 below	ACS880-01-115A-2	115	40.00 HP	109	40	87	30.00 HP	R6	UL Open, 1, 12; IP 20,21,55	28.62 x 9.92 x 14.1	93.1	34.81 x 11.46 x 16.59	95.0	Interpolated
		ACS880-01-145A-2	145	50.00 HP	138	50	105	40.00 HP	R6	UL Open, 1, 12; IP 20,21,55	28.62 x 9.92 x 14.1	93.1	34.81 x 11.46 x 16.59	95.0	Interpolated
380-415		ACS880-01-105A-3	105	55.00 kW	100	55.00 kW	87	45.00 kW	R6	UL Open, 1, 12; IP 20,21,55	28.62 x 9.92 x 14.1	93.1	34.81 x 11.46 x 16.59	95.0	Interpolated
		ACS880-01-145A-3	145	75.00 kW	138	75.00 kW	105	55.00 kW	R6	UL Open, 1, 12; IP 20,21,55	28.62 x 9.92 x 14.1	93.1	34.81 x 11.46 x 16.59	95.0	Interpolated
380-500		ACS880-01-096A-5	NA	NA	96	75.00 HP	77	60.00 HP	R6	UL Open, 1, 12; IP 20,21,55	28.62 x 9.92 x 14.1	93.1	34.81 x 11.46 x 16.59	95.0	Interpolated
		ACS880-01-124A-5	NA	NA	124	100.00 HP	96	75.00 HP	R6	UL Open, 1, 12; IP 20,21,55	28.62 x 9.92 x 14.1	93.1	34.81 x 11.46 x 16.59	95.0	Interpolated
525-690		ACS880-01-061A-7	NA	NA	62	60.00 HP	52	50.00 HP	R6	UL Open, 1, 12; IP 20,21,55	28.62 x 9.92 x 14.1	93.1	34.81 x 11.46 x 16.59	95.0	Interpolated
	ACS880-01-084A-7	NA	NA	77	75.00 HP	62	60.00 HP	R6	UL Open, 1, 12; IP 20,21,55	28.62 x 9.92 x 14.1	93.1	34.81 x 11.46 x 16.59	95.0	Interpolated	
200-240	For Axx580: xx = CS, CH, CQ, or YK (NEC)	Axx580-01-143A-2	143	50.00 HP	143	50.00 HP	114	40.00 HP	R6	UL Open, 1, 12	28.62 x 9.92 x 14.53	93.5	34.81 x 11.46 x 16.40	95.0	Interpolated
440-480		Axx580-01-124A-4	NA	NA	124	100.00 HP	96	75.00 HP	R6	UL Open, 1, 12	28.62 x 9.92 x 14.53	93.5	34.81 x 11.46 x 16.40	95.0	Interpolated
200-240	For ACx580: x = S, H, or Q (IEC)	ACx580-01-144A-2	144	37.00 kW	143	37.00 kW	114	30.00 kW	R6	IP 20, 21, 55	28.62 x 9.92 x 14.53	93.5	34.81 x 11.46 x 16.40	95.0	Interpolated
380-480		ACx580-01-145A-4	145	75.00 kW	138	75.00 kW	105	55.00 kW	R6	IP 20, 21, 55	28.62 x 9.92 x 14.53	93.5	34.81 x 11.46 x 16.40	95.0	Interpolated
208-240	ACS880 See Note 2 below	ACS880-01-170A-2	170	60.00 HP	162	60	145	50.00 HP	R7	UL Open, 1, 12; IP 20,21,55	34.66 x 11.18 x 14.4	117.0	40.87 x 12.67 x 16.65	119.1	Interpolated
		ACS880-01-206A-2	206	75.00 HP	196	75	169	60.00 HP	R7	UL Open, 1, 12; IP 20,21,55	34.66 x 11.18 x 14.4	117.0	40.87 x 12.67 x 16.65	119.1	Interpolated
380-415		ACS880-01-169A-3	169	90.00 kW	161	90.00 kW	145	75.00 kW	R7	UL Open, 1, 12; IP 20,21,55	34.66 x 11.18 x 14.4	117.0	40.87 x 12.67 x 16.65	119.1	Interpolated
		ACS880-01-206A-3	206	110.00 kW	196	110.00 kW	169	90.00 kW	R7	UL Open, 1, 12; IP 20,21,55	34.66 x 11.18 x 14.4	117.0	40.87 x 12.67 x 16.65	119.1	Interpolated
380-500		ACS880-01-156A-5	NA	NA	156	125.00 HP	124	100.00 HP	R7	UL Open, 1, 12; IP 20,21,55	34.66 x 11.18 x 14.4	117.0	40.87 x 12.67 x 16.65	119.1	Interpolated
		ACS880-01-180A-5	NA	NA	180	150.00 HP	156	125.00 HP	R7	UL Open, 1, 12; IP 20,21,55	34.66 x 11.18 x 14.4	117.0	40.87 x 12.67 x 16.65	119.1	Interpolated
525-690		ACS880-01-098A-7	NA	NA	99	100.00 HP	77	75.00 HP	R7	UL Open, 1, 12; IP 20,21,55	34.66 x 11.18 x 14.4	117.0	40.87 x 12.67 x 16.65	119.1	Interpolated
	ACS880-01-119A-7	NA	NA	125	125.00 HP	99	100.00 HP	R7	UL Open, 1, 12; IP 20,21,55	34.66 x 11.18 x 14.4	117.0	40.87 x 12.67 x 16.65	119.1	Interpolated	
200-240	For ACx580: x = S, H, or Q (IEC)	ACx580-01-171A-2	171	45.00 kW	169	45.00 kW	143	37.00 kW	R7	IP 20, 21, 55	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
		ACx580-01-213A-2	213	55.00 kW	211	55.00 kW	169	45.00 kW	R7	IP 20, 21, 55	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
380-480		ACx580-01-169A-4	169	90.00 kW	161	90.00 kW	145	75.00 kW	R7	IP 20, 21, 55	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
		ACx580-01-206A-4	206	110.00 kW	196	110.00 kW	169	90.00 kW	R7	IP 20, 21, 55	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
575-600		ACx580-01-099A-6	NA	NA	99	75.00 kW	77	55.00 kW	R7	IP 20, 21, 55	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
	ACx580-01-125A-6	NA	NA	125	90.00 kW	99	75.00 kW	R7	IP 20, 21, 55	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated	
200-240	For Axx580: xx = CS, CH, CQ, or YK (NEC)	Axx580-01-169A-2	169	60.00 HP	169	60.00 HP	143	50.00 HP	R7	UL Open, 1, 12	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
		Axx580-01-211A-2	211	75.00 HP	211	75.00 HP	169	60.00 HP	R7	UL Open, 1, 12	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
440-480		Axx580-01-156A-4	NA	NA	156	125.00 HP	124	100.00 HP	R7	UL Open, 1, 12	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
		Axx580-01-180A-4	NA	NA	180	150.00 HP	156	125.00 HP	R7	UL Open, 1, 12	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
575-600		Axx580-01-099A-6	NA	NA	99	100.00 HP	77	75.00 HP	R7	UL Open, 1, 12	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated
	Axx580-01-125A-6	NA	NA	125	125.00 HP	99	100.00 HP	R7	UL Open, 1, 12	34.67 x 11.18 x 14.58	119.1	41.00 x 13.00 x 16.00	123.5	Interpolated	

- Notes:
1. ABB is the manufacturer for all units.
 2. For ACS880-01-xxxx-2, -5, -7 both NEC and IEC ratings apply. Table shows only NEC rating. ACS880-01-xxxx-3 is only available as an IEC rating.
 3. Flange Kit options are available for all units, Type Code +C135
 4. All units were tested in rigid and isolated mounting configurations to SDS=2.0 at z/h=1.0, and SDS=2.5 at z/h=0.0.
 5. When an Optional Subcomponent is present, its Type Code is appended to the model no.
 6. AYK580-01 units are identical to ACx580-01 units other than software and branding

Table 4 - Certified Subcomponents - Drives - 580-01 & 880-01 - Wall Mount Around Perimeter Using Flange Kit (Cont.)

System Voltage [V]	Model ⁶	ABB Model Number	Normal Duty Ratings		Light Duty Ratings		Heavy Duty Ratings		Frame Size	Available Enclosure Types	Type 1		Type 12		UUT
			Current [A]	kW / HP	Current [A]	kW / HP	Current [A]	kW / HP			Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	
208-240	ACS880 See Note 2 below	ACS880-01-274A-2	274	100.00 HP	260	100.00 HP	213	75.00 HP	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 15.21	150.0	44.23 x 13.8 x 17.8	163.2	Interpolated
380-415		ACS880-01-246A-3	246	132.00 kW	234	132.00 kW	206	110.00 kW	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 15.21	150.0	44.23 x 13.8 x 17.8	163.2	Interpolated
380-500		ACS880-01-293A-3	293	160.00 kW	278	160.00 kW	246	132.00 kW	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 15.21	150.0	44.23 x 13.8 x 17.8	163.2	Interpolated
525-690		ACS880-01-240A-5	NA	NA	240	200.00 HP	180	150.00 HP	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 15.21	150.0	44.23 x 13.8 x 17.8	163.2	Interpolated
		ACS880-01-260A-5	NA	NA	260	200.00 HP	240	150.00 HP	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 15.21	150.0	44.23 x 13.8 x 17.8	163.2	Interpolated
		ACS880-01-142A-7	NA	NA	144	150.00 HP	125	125.00 HP	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 15.21	150.0	44.23 x 13.8 x 17.8	163.2	Interpolated
200-240	For ACx580: x = S, H, or Q (IEC)	ACS880-01-174A-7	NA	NA	180	200.00 HP	144	150.00 HP	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 15.21	150.0	44.23 x 13.8 x 17.8	163.2	Interpolated
200-240		ACx580-01-276A-2	276	75.00 kW	273	75.00 kW	211	55.00 kW	R8	IP 20, 21, 55	38.00 x 11.81 x 15.47	152.2	44.23 x 13.80 x 17.77	170.0	Interpolated
380-480		ACx580-01-246A-4	246	132.00 kW	234	132.00 kW	206	110.00 kW	R8	IP 20, 21, 55	38.00 x 11.81 x 15.47	152.2	44.23 x 13.80 x 17.77	170.0	Interpolated
575-600		ACx580-01-293A-4	293	160.00 kW	278	160.00 kW	246	132.00 kW	R8	IP 20, 21, 55	38.00 x 11.81 x 15.47	152.2	44.23 x 13.80 x 17.77	170.0	Interpolated
200-240	For Axx580: xx = CS, CH, CQ, or YK (NEC)	ACx580-01-144A-6	NA	NA	144	110.00 kW	125	90.00 kW	R8	IP 20, 21, 55	38.00 x 11.81 x 15.47	152.2	44.23 x 13.80 x 17.77	170.0	Interpolated
200-240		Axx580-01-273A-2	273	100.00 HP	273	100.00 HP	211	75.00 HP	R8	UL Open, 1, 12	38.00 x 11.81 x 15.47	152.2	44.23 x 13.80 x 17.77	170.0	Interpolated
440-480		Axx580-01-240A-4	NA	NA	240	200.00 HP	180	150.00 HP	R8	UL Open, 1, 12	38.00 x 11.81 x 15.47	152.2	44.23 x 13.80 x 17.77	170.0	Interpolated
575-600		Axx580-01-260A-4	NA	NA	260	200.00 HP	240	150.00 HP	R8	UL Open, 1, 12	38.00 x 11.81 x 15.47	152.2	44.23 x 13.80 x 17.77	170.0	Interpolated
380-480	For ACx580: x = S, H, or Q (IEC)	Axx580-01-144A-6	NA	NA	144	150.00 HP	125	125.00 HP	R8	UL Open, 1, 12	38.00 x 11.81 x 15.47	152.2	44.23 x 13.80 x 17.77	170.0	Interpolated
575-600		ACx580-01-363A-4	363	200.00 kW	345	200.00 kW	293	160.00 kW	R9	IP 20, 21, 55	37.60 x 14.96 x 16.46	205.0	46.75 x 16.95 x 18.60	205.0	Interpolated
		ACx580-01-430A-4	430	250.00 kW	400	200.00 kW	363	200.00 kW	R9	IP 20, 21, 55	37.60 x 14.96 x 16.46	205.0	46.75 x 16.95 x 18.60	205.0	Interpolated
		ACx580-01-192A-6	NA	NA	192	150.00 kW	144	110.00 kW	R9	IP 20, 21, 55	37.60 x 14.96 x 16.46	205.0	46.75 x 16.95 x 18.60	205.0	Interpolated
		ACx580-01-242A-6	NA	NA	242	180.00 kW	192	150.00 kW	R9	IP 20, 21, 55	37.60 x 14.96 x 16.46	205.0	46.75 x 16.95 x 18.60	205.0	Interpolated
440-480		ACx580-01-271A-6	NA	NA	257	180.00 kW	210	150.00 kW	R9	IP 20, 21, 55	37.60 x 14.96 x 16.46	205.0	46.75 x 16.95 x 18.60	205.0	Interpolated
	Axx580-01-192A-6	NA	NA	192	200.00 HP	144	150.00 HP	R9	UL Open, 1, 12	37.60 x 14.96 x 16.46	205.0	46.75 x 16.95 x 18.60	205.0	Interpolated	
200-240	For Axx580: xx = CS, CH, CQ, or YK (NEC)	Axx580-01-242A-6	NA	NA	242	250.00 HP	192	200.00 HP	R9	UL Open, 1, 12	37.60 x 14.96 x 16.46	205.0	46.75 x 16.95 x 18.60	205.0	Interpolated
		Axx580-01-271A-6	NA	NA	271	250.00 HP	210	200.00 HP	R9	UL Open, 1, 12	37.60 x 14.96 x 16.46	205.0	46.75 x 16.95 x 18.60	205.0	Interpolated
		Axx580-01-302A-4	NA	NA	302	250.00 HP	260	200.00 HP	R9	UL Open, 1, 12	37.60 x 14.96 x 16.46	205.0	46.75 x 16.95 x 18.60	205.0	Interpolated
		Axx580-01-361A-4	NA	NA	361	300.00 HP	302	250.00 HP	R9	UL Open, 1, 12	37.60 x 14.96 x 16.46	205.0	46.75 x 16.95 x 18.60	205.0	Interpolated
380-480	For ACx580: x = S, H, or Q (IEC)	Axx580-01-414A-4	NA	NA	414	350.00 HP	361	300.00 HP	R9	UL Open, 1, 12	37.60 x 14.96 x 16.46	205.0	46.75 x 16.95 x 18.60	205.0	Interpolated
		ACx580-01-343A-2	NA	NA	343	125.00 HP	273	100.00HP	R9	UL Open, 1, 12	37.60 x 14.96 x 16.46	205.0	46.75 x 16.95 x 18.60	205.0	Interpolated
380-415	ACS880 See Note 2 below	ACx580-01-396A-2	NA	NA	396	150.00 HP	340	125.00 HP	R9	UL Open, 1, 12	37.60 x 14.96 x 16.46	205.0	46.75 x 16.95 x 18.60	205.0	Interpolated
		ACS880-01-363A-3	363	200.00 kW	345	200.00 kW	293	160.00 kW	R9	UL Open, 1, 12; IP 20,21,55	37.60 x 14.96 x 16.27	205.0	46.75 x 16.95 x 18.78	205.0	Interpolated
525-690	ACS880 See Note 2 below	ACS880-01-430A-3	430	250.00 kW	400	250.00 kW	363	200.00 kW	R9	UL Open, 1, 12; IP 20,21,55	37.60 x 14.96 x 16.27	205.0	46.75 x 16.95 x 18.78	205.0	Interpolated
		ACS880-01-210A-7	NA	NA	242	250.00 HP	192	200.00 HP	R9	UL Open, 1, 12; IP 20,21,55	37.60 x 14.96 x 16.27	205.0	46.75 x 16.95 x 18.78	205.0	Interpolated
380-500	ACS880 See Note 2 below	ACS880-01-271A-7	NA	NA	271	250.00 HP	242	250.00 HP	R9	UL Open, 1, 12; IP 20,21,55	37.60 x 14.96 x 16.27	205.0	46.75 x 16.95 x 18.78	205.0	Interpolated
		ACS880-01-302A-5	NA	NA	302	250.00 HP	360	200.00 HP	R9	UL Open, 1, 12; IP 20,21,55	37.60 x 14.96 x 16.27	205.0	46.75 x 16.95 x 18.78	205.0	Interpolated
		ACS880-01-361A-5	NA	NA	361	300.00 HP	302	250.00 HP	R9	UL Open, 1, 12; IP 20,21,55	37.60 x 14.96 x 16.27	205.0	46.75 x 16.95 x 18.78	205.0	Interpolated
		ACS880-01-414A-5	NA	NA	414	350.00 kW	361	300.00 HP	R9	UL Open, 1, 12; IP 20,21,55	37.60 x 14.96 x 16.27	205.0	46.75 x 16.95 x 18.78	205.0	Interpolated
		ACS880-01-414A-5	NA	NA	414	350.00 kW	361	300.00 HP	R9	UL Open, 1, 12; IP 20,21,55	-	-	27.0 ⁽⁷⁾ x 14.0 x 16.0	205.0	UUT-13

Notes: 1. ABB is the manufacturer for all units.
 2. For ACS880-01-xxxx-2, -5, -7 both NEC and IEC ratings apply. Table shows only NEC rating. ACS880-01-xxxx-3 is only available as an IEC rating.
 3. Flange Kit options are available for all units, Type Code +C135
 4. All units were tested in rigid and isolated mounting configurations to SDS=2.0 at z/h=1.0, and SDS=2.5 at z/h=0.0.
 5. When an Optional Subcomponent is present, its Type Code is appended to the model number
 6. AYK580-01 units are identical to ACx580-01 units other than software and branding
 7. UUT height measurement does not include drip hood

Table 5 - Certified Subcomponents - Drives - 580-31 & 880-11, -31 - Wall Mount Units

System Voltage [V]	Model ⁵	Construction	ABB Model Number	Normal Duty Ratings		Light Duty Ratings		Heavy Duty Ratings		Frame Size	Available Enclosure Types	Type 1		Type 12		UUT
				Current [A]	kW / HP	Current [A]	kW / HP	Current [A]	kW / HP			Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	
380-415 380-500	ACS880 See Note 2 below	-11, -31, -OEMUx where OEM = any OEM code	ACS880-xx-09A4-3	10	4.00 kW	9.5	4.00 kW	8	3.00 kW	R3	UL Open, 1, 12; IP 20,21,55	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
			ACS880-xx-12A6-3	12.9	5.50 kW	12	5.50 kW	10	4.00 kW	R3	UL Open, 1, 12; IP 20,21,55	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
			ACS880-xx-017A-3	17	7.50 kW	16	7.50 kW	12.9	5.40 kW	R3	UL Open, 1, 12; IP 20,21,55	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
			ACS880-xx-025A-3	25	11.00 kW	24	11.00 kW	17	7.50 kW	R3	UL Open, 1, 12; IP 20,21,55	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
			ACS880-xx-07A6-5	NA	NA	7.6	5.00 HP	5.2	3.00 HP	R3	UL Open, 1, 12; IP 20,21,55	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
			ACS880-xx-11A0-5	NA	NA	11	7.50 HP	7.6	5.00 HP	R3	UL Open, 1, 12; IP 20,21,55	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
			ACS880-xx-014A-5	NA	NA	14	10.00 HP	11	7.50 HP	R3	UL Open, 1, 12; IP 20,21,55	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
200-240	For Axx580: xx = CS, CH, CQ, or YK (NEC)	-31, -OEMUx where OEM = any OEM code	ACS880-xx-021A-5	NA	NA	21	15.00 HP	14	10.00 HP	R3	UL Open, 1, 12; IP 20,21,55	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
			Axx580-31-017A-2	NA	NA	16.7	5.00 HP	10.6	3.00 HP	R3	UL Open, 1, 12	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
480	For Axx580: xx = CS, CH, CQ, or YK (NEC)	-31, -OEMUx where OEM = any OEM code	Axx580-31-024A-2	NA	NA	24.2	7.5 HP	16.7	5.00 HP	R3	UL Open, 1, 12	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
			Axx580-31-07A6-4	NA	NA	7.6	5.00 HP	5.2	3.00 HP	R3	UL Open, 1, 12	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	UUT-22, UUT-25
			Axx580-31-012A-4	NA	NA	12	7.50 HP	7.6	5.00 HP	R3	UL Open, 1, 12	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
			Axx580-31-014A-4	NA	NA	14	10.00 HP	12	7.50 HP	R3	UL Open, 1, 12	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
			Axx580-31-023A-4	NA	NA	23	15.00 HP	14	10.00 HP	R3	UL Open, 1, 12	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
400 480	For ACx580: x = S, H, or Q (IEC)	-31, -OEMUx where OEM = any OEM code	ACH580-31-023A-4	NA	NA	23	15.00 HP	14	10.00 HP	R3	UL Open, 1, 12	20.0 x 8.0 x 14.0	44	-	-	UUT-03
			ACx580-31-09A5-4	9.4	4.00 kW	8.9	4.00 kW	NA	NA	R3	IP 20,21,55	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
			ACx580-31-12A7-4	12.6	5.50 kW	12	5.50 kW	NA	NA	R3	IP 20,21,55	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
			ACx580-31-018A-4	17	7.50 kW	16.2	7.50 kW	NA	NA	R3	IP 20,21,55	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
			ACx580-31-026A-4	25	11.00 kW	23.8	11.00 kW	NA	NA	R3	IP 20,21,55	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
			ACx580-31-09A5-4	NA	NA	7.6	5.00 HP	5.2	3.00 HP	R3	IP 20,21,55	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
			ACx580-31-12A7-4	NA	NA	12	7.50 HP	7.6	5.00 HP	R3	IP 20,21,55	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
380-415 380-500	ACS880 See Note 2 below	-11, -31, -OEMUx where OEM = any OEM code	ACx580-31-018A-4	NA	NA	14	10.00 HP	12	7.50 HP	R3	IP 20,21,55	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
			ACx580-31-026A-4	NA	NA	23	15.00 HP	14	10.00 HP	R3	IP 20,21,55	19.49 x 8.07 x 14.02	47	19.49 x 8.07 x 14.17	51.4	Interpolated
			ACS880-xx-032A-3	32	15.00 kW	30	15.00 kW	25	11.00 kW	R6	UL Open, 1, 12; IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACS880-xx-038A-3	38	18.50 kW	36	18.50 kW	32	15.00 kW	R6	UL Open, 1, 12; IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACS880-xx-045A-3	45	22.00 kW	43	22.00 kW	38	18.50 kW	R6	UL Open, 1, 12; IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACS880-xx-061A-3	61	30.00 kW	58	30.00 kW	45	22.00 kW	R6	UL Open, 1, 12; IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACS880-xx-072A-3	72	37.00 kW	68	37.00 kW	61	30.00 kW	R6	UL Open, 1, 12; IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACS880-xx-087A-3	87	45.00 kW	83	45.00 kW	72	37.00 kW	R6	UL Open, 1, 12; IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACS880-xx-027A-5	NA	NA	27	20.00 HP	21	15.00 HP	R6	UL Open, 1, 12; IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACS880-xx-034A-5	NA	NA	34	25.00 HP	27	20.00 HP	R6	UL Open, 1, 12; IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACS880-xx-040A-5	NA	NA	40	30.00 HP	34	25.00 HP	R6	UL Open, 1, 12; IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACS880-xx-052A-5	NA	NA	52	40.00 HP	40	30.00 HP	R6	UL Open, 1, 12; IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACS880-xx-065A-5	NA	NA	65	50.00 HP	52	40.00 HP	R6	UL Open, 1, 12; IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
ACS880-xx-077A-5	NA	NA	77	60.00 HP	65	50.00 HP	R6	UL Open, 1, 12; IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated			

Notes: 1. ABB is the manufacturer for all units.
 2. For ACS880-xx-xxxx-5 both NEC and IEC ratings apply. Table shows only NEC rating. ACS880-xx-xxxx-3 is only available as an IEC rating.
 3. All units were tested in rigid and isolated mounting configurations to SDS=2.0 at z/h=1.0, and SDS=2.5 at z/h=0.0.
 4. When an Optional Subcomponent is present, its Type Code is appended to the model number
 5. AYK580-01 units are identical to ACx580-01 units other than software and branding
 6. Listed drive model was tested as a subcomponent within listed UUT

Table 5 - Certified Subcomponents - Drives - 580-31 & 880-11, -31 - Wall Mount Units (Cont.)

System Voltage [V]	Model ⁵	Construction	ABB Model Number	Normal Duty Ratings		Light Duty Ratings		Heavy Duty Ratings		Frame Size	Available Enclosure Types	Type 1		Type 12		UUT
				Current [A]	kW / HP	Current [A]	kW / HP	Current [A]	kW / HP			Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	Max Dimensions H x W x D [in]	Max Drv. Wt. [lb]	
200-240	For Axx580: xx = CS, CH, CQ, or YK (NEC)		ACx580-31-031A-2	NA	NA	30.8	10.00 HP	24.2	7.5	R6	UL Open, 1, 12	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACx580-31-046A-2	NA	NA	46.2	15.00 HP	30.8	10	R6	UL Open, 1, 12	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACx580-31-059A-2	NA	NA	59.4	20.00 HP	46.2	15	R6	UL Open, 1, 12	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACx580-31-075A-2	NA	NA	74.8	25.00 HP	59.4	20	R6	UL Open, 1, 12	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACx580-31-088A-2	NA	NA	88	30.00 HP	74.8	25	R6	UL Open, 1, 12	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			Axx580-31-027A-4	NA	NA	27	20.00 HP	23	15.00 HP	R6	UL Open, 1, 12	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			Axx580-31-034A-4	NA	NA	34	25.00 HP	27	20.00 HP	R6	UL Open, 1, 12	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			Axx580-31-044A-4	NA	NA	44	30.00 HP	34	25.00 HP	R6	UL Open, 1, 12	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			Axx580-31-052A-4	NA	NA	52	40.00 HP	44	30.00 HP	R6	UL Open, 1, 12	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
480			Axx580-31-065A-4	NA	NA	65	50.00 HP	52	40.00 HP	R6	UL Open, 1, 12	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			Axx580-31-077A-4	NA	NA	77	60.00 HP	65	50.00 HP	R6	UL Open, 1, 12	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	UUT-23
			ACx580-31-033A-4	32	15.00 kW	30.4	15.00 kW	NA	NA	R6	IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACx580-31-039A-4	38	18.50 kW	36.1	18.50 kW	NA	NA	R6	IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACx580-31-046A-4	45	22.00 kW	42.8	22.00 kW	NA	NA	R6	IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACx580-31-062A-4	62	30.00 kW	58.9	30.00 kW	NA	NA	R6	IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACx580-31-073A-4	73	37.00 kW	69.4	37.00 kW	NA	NA	R6	IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACx580-31-088A-4	88	45.00 kW	83.6	45.00 kW	NA	NA	R6	IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACx580-31-033A-4	NA	NA	27	20.00 HP	23	15.00 HP	R6	IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
480	For ACx580: x = S, H, or Q (IEC)		ACx580-31-039A-4	NA	NA	34	25.00 HP	27	20.00 HP	R6	IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACx580-31-046A-4	NA	NA	44	30.00 HP	34	25.00 HP	R6	IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACx580-31-062A-4	NA	NA	52	40.00 HP	44	30.00 HP	R6	IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACx580-31-073A-4	NA	NA	65	50.00 HP	52	40.00 HP	R6	IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			ACx580-31-088A-4	NA	NA	77	60.00 HP	65	50.00 HP	R6	IP 20,21,55	30.35 x 9.92 x 15.44	134.5	36.56 x 11.46 x 17.64	138.9	Interpolated
			Axx580-31-96A-4	NA	NA	96	75.00 HP	NA	NA	R8	UL Open, 1, 12	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			Axx580-31-124A-4	NA	NA	124	100.00 HP	NA	NA	R8	UL Open, 1, 12	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			Axx580-31-156A-4	NA	NA	156	125.00 HP	NA	NA	R8	UL Open, 1, 12	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			Axx580-31-180A-4	NA	NA	180	150.00 HP	NA	NA	R8	UL Open, 1, 12	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	UUT-24
400	For ACx580: x = S, H, or Q (IEC)		ACx580-31-106A-4	NA	NA	96	75.00 HP	NA	NA	R8	IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			ACx580-31-145A-4	NA	NA	124	100.00 HP	NA	NA	R8	IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			ACx580-31-169A-4	NA	NA	156	125.00 HP	NA	NA	R8	IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			ACx580-31-206A-4	NA	NA	180	150.00 HP	NA	NA	R8	IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			ACx580-31-106A-4	106	55.00 kW	100	55.00 kW	NA	NA	R8	IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			ACx580-31-145A-4	145	75.00 kW	138	75.00 kW	NA	NA	R8	IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			ACx580-31-169A-4	169	90.00 kW	161	90.00 kW	NA	NA	R8	IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			ACx580-31-206A-4	206	110.00 kW	196	110.00 kW	NA	NA	R8	IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			ACx580-31-114A-2	NA	NA	114	40.00 HP	88	30.00 HP	R8	IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
200-240			ACx580-31-143A-2	NA	NA	143	50.00 HP	114	40.00 HP	R8	IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			ACx580-31-169A-2	NA	NA	169	60.00 HP	143	50.00 HP	R8	IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			ACx580-31-211A-2	NA	NA	211	75.00 HP	169	60.00 HP	R8	IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
380-415	ACS880 See Note 2 below		ACS880-xx-105A-3	105	55.00 kW	100	55.00 kW	87	45.00 kW	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			ACS880-xx-145A-3	145	75.00 kW	138	75.00 kW	105	55.00 kW	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			ACS880-xx-169A-3	169	90.00 kW	161	90.00 kW	145	75.00 kW	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			ACS880-xx-206A-3	206	110.00 kW	196	110.00 kW	169	90.00 kW	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			ACS880-xx-101A-5	NA	NA	96	75.00 HP	77	60.00 HP	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			ACS880-xx-124A-5	NA	NA	124	100.00 HP	96	75.00 HP	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
380-500			ACS880-xx-156A-5	NA	NA	156	125.00 HP	124	100.00 HP	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			ACS880-xx-180A-5	NA	NA	180	150.00 HP	156	125.00 HP	R8	UL Open, 1, 12; IP 20,21,55	38.01 x 11.81 x 16.94	224.9	44.39 x 13.80 x 19.53	238.1	Interpolated
			ACS880-11-180A-5	NA	NA	180	150.00 HP	156	125.00 HP	R8	UL Open, 1, 12; IP 20,21,55	-	-	38.0 ⁽⁶⁾ x 12.0 x 20.0	268	UUT-04

Notes: 1. ABB is the manufacturer for all units.
 2. For ACS880-xx-xxxx-5 both NEC and IEC ratings apply. Table shows only NEC rating. ACS880-xx-xxxx-3 is only available as an IEC rating.
 3. All units were tested in rigid and isolated mounting configurations to SDS=2.0 at z/h=1.0, and SDS=2.5 at z/h=0.0.
 4. When an Optional Subcomponent is present, its Type Code is appended to the model number

5. AYK580-01 units are identical to ACx580-01 units other than software and branding
 6. UUT height measurement does not include drip hood

Table 6 - Certified Subcomponents - Drives - Axx580-31,-34 - Combination Rigid Floor and Wall Mounted

System Voltage [V]	Model	Construction	ABB Model Number	Normal Duty		Light Duty		Heavy Duty		Frame Size	Available Enclosure Types	Max Dimensions H x W x D [in]	Max Drive Weight [lb]	UUT
				Current [A]	kW / HP	Current [A]	kW / HP	Current [A]	kW / HP					
200-240	For Axx580: xx = CS, CH, CQ, or YK (NEC)	-31, -OEMUx where OEM = any OEM code	ACx580-31-031A-2	NA	NA	30.8	10.00 HP	24.2	7.5	R6	UL Open, 1, 12	36.56 x 11.46 x 17.64	138.9	Extrapolated
			ACx580-31-046A-2	NA	NA	46.2	15.00 HP	30.8	10	R6	UL Open, 1, 12	36.56 x 11.46 x 17.64	138.9	Extrapolated
			ACx580-31-059A-2	NA	NA	59.4	20.00 HP	46.2	15	R6	UL Open, 1, 12	36.56 x 11.46 x 17.64	138.9	Extrapolated
			ACx580-31-075A-2	NA	NA	74.8	25.00 HP	59.4	20	R6	UL Open, 1, 12	36.56 x 11.46 x 17.64	138.9	Extrapolated
			ACx580-31-088A-2	NA	NA	88	30.00 HP	74.8	25	R6	UL Open, 1, 12	36.56 x 11.46 x 17.64	138.9	Extrapolated
			Axx580-31-027A-4	NA	NA	27	20.00 HP	23	15.00 HP	R6	UL Open, 1, 12	36.56 x 11.46 x 17.64	138.9	Extrapolated
			Axx580-31-034A-4	NA	NA	34	25.00 HP	27	20.00 HP	R6	UL Open, 1, 12	36.56 x 11.46 x 17.64	138.9	Extrapolated
			Axx580-31-044A-4	NA	NA	44	30.00 HP	34	25.00 HP	R6	UL Open, 1, 12	36.56 x 11.46 x 17.64	138.9	Extrapolated
			Axx580-31-052A-4	NA	NA	52	40.00 HP	44	30.00 HP	R6	UL Open, 1, 12	36.56 x 11.46 x 17.64	138.9	Extrapolated
			Axx580-31-065A-4	NA	NA	65	50.00 HP	52	40.00 HP	R6	UL Open, 1, 12	36.56 x 11.46 x 17.64	138.9	Extrapolated
			Axx580-31-077A-4	NA	NA	77	60.00 HP	65	50.00 HP	R6	UL Open, 1, 12	36.56 x 11.46 x 17.64	138.9	UUT-27
380-480	ACx580 x = S, or H	34	ACx580-34-240A-4	240A	200HP	NA	NA	NA	NA	R11	IP20, UL Open	68.54 x 28.07 x 20.16	805	Extrapolated
			ACx580-34-302A-4	302A	250HP	NA	NA	NA	NA	R11	IP20, UL Open	68.54 x 28.07 x 20.16	805	Extrapolated
			ACx580-34-361A-4	361A	300HP	NA	NA	NA	NA	R11	IP20, UL Open	68.54 x 28.07 x 20.16	805	Extrapolated
			ACx580-34-414A-4	414A	350HP	NA	NA	NA	NA	R11	IP20, UL Open	68.54 x 28.07 x 20.16	805	Extrapolated
			ACx580-34-477A-4	477A	400HP	NA	NA	NA	NA	R11	IP20, UL Open	68.54 x 28.07 x 20.16	805	UUT-28, UUT-29

Notes: 1. ABB is the manufacturer for all units. 2. All units were tested in rigid and isolated mounting configurations to S_{DS}=2.0 at z/h=1.0, and S_{DS}=2.5 at z/h=0.0 (or greater). 3. Axx580-01 units are identical to ACx580-01 units other than software and branding. 4. AYK580-01 units are identical to ACx580-01 units other than software and branding.

Table 7 - Certified Components - Drives - ACx180-04y - Wall Mounted

System Voltage [V]	Model	Construction	ABB Model Number ¹	Normal Duty		Light Duty		Heavy Duty		Frame Size	Available Enclosure Types	Max Dimensions H x W x D [in]	Max Drive Weight [lb]	UUT
				Current [A]	kW / HP	Current [A]	kW / HP	Current [A]	kW / HP					
115-120			ACx180-04y-02A4-0	2.4	0.5 HP	2.4	0.5 HP	1.8	0.33 HP	R1	IP20, UL Open	8.66 x 2.76 x 5.63	3	Extrapolated
			ACx180-04y-03A7-0	3.7	0.75 HP	3.5	0.75 HP	2.4	0.5 HP	R1	IP20, UL Open	8.66 x 2.76 x 5.63	3	Extrapolated
			ACx180-04y-04A8-0	4.8	1 HP	4.6	1 HP	3.5	0.75 HP	R1	IP20, UL Open	8.66 x 2.76 x 5.63	3	Extrapolated
			ACx180-04y-06A9-0	6.9	1.5 HP	6.6	1.5 HP	4.6	1 HP	R1	IP20, UL Open	8.66 x 2.76 x 5.63	3	Extrapolated
			ACx180-04y-02A4-1	2.4	0.5 HP	2.4	0.5 HP	1.8	0.33 HP	R0	IP20, UL Open	8.23 x 2.76 x 5.63	2.2	Extrapolated
			ACx180-04y-03A7-1	3.7	0.75 HP	3.5	0.75 HP	2.4	0.5 HP	R0	IP20, UL Open	8.23 x 2.76 x 5.63	2.2	Extrapolated
			ACx180-04y-04A8-1	4.8	1 HP	4.6	1 HP	3.7	0.75 HP	R0	IP20, UL Open	8.23 x 2.76 x 5.63	2.2	Extrapolated
			ACx180-04y-06A9-1	6.9	1.5 HP	6.6	1.5 HP	4.5	1 HP	R1	IP20, UL Open	8.66 x 2.76 x 5.63	3	Extrapolated
			ACx180-04y-07A8-1	7.8	2 HP	7.5	2 HP	6.6	1.5 HP	R1	IP20, UL Open	8.66 x 2.76 x 5.63	3	Extrapolated
			ACx180-04y-09A8-1	9.8	3 HP	9.8	3 HP	7.5	2 HP	R1	IP20, UL Open	8.66 x 2.76 x 5.63	3	Extrapolated
200-240	ACx180 x=S, or H	04y y = S, or N	ACx180-04y-12A2-1	12.2	3 HP	11.6	3 HP	9.8	3 HP	R2	IP20, UL Open	9.06 x 4.72 x 5.63	4.5	Extrapolated
			ACx180-04y-02A4-2	2.4	0.5 HP	2.3	0.5 HP	1.8	0.33 HP	R0	IP20, UL Open	8.23 x 2.76 x 5.63	2.2	Extrapolated
			ACx180-04y-03A7-2	3.7	0.75 HP	3.5	0.75 HP	2.4	0.5 HP	R0	IP20, UL Open	7.5 x 2.8 x 5.8	2	UUT-30B
			ACx180-04y-04A8-2	4.8	1 HP	4.6	1 HP	3.7	0.75 HP	R0	IP20, UL Open	7.0 x 2.8 x 5.5	2	UUT-30A
			ACx180-04y-06A9-2	6.9	1.5 HP	6.6	1.5 HP	4.5	1 HP	R1	IP20, UL Open	8.66 x 2.76 x 5.63	3	Interpolated
			ACx180-04y-07A8-2	7.8	2 HP	7.4	2 HP	6.6	1.5 HP	R1	IP20, UL Open	8.66 x 2.76 x 5.63	3	Interpolated
			ACx180-04y-09A8-2	9.8	3 HP	9.3	3 HP	7.4	2 HP	R1	IP20, UL Open	8.66 x 2.76 x 5.63	3	Interpolated
			ACx180-04y-15A6-2	15.6	3 HP	14.6	3 HP	10.7	3 HP	R2	IP20, UL Open	9.06 x 4.72 x 5.63	4.5	Interpolated
			ACx180-04y-17A5-2	17.5	5 HP	16.7	5 HP	12.2	3 HP	R2	IP20, UL Open	9.06 x 4.72 x 5.63	4.5	Interpolated
			ACx180-04y-25A0-2	24.2	7.5 HP	24.2	7.5 HP	16.7	5 HP	R3	IP20, UL Open	9.5 x 6.69 x 6.85	7.5	Interpolated
			ACx180-04y-033A-2	30.8	10 HP	30.8	10 HP	24.2	7.5 HP	R3	IP20, UL Open	9.5 x 6.69 x 6.85	7.5	Interpolated
			ACx180-04y-048A-2	46.2	15 HP	46.2	15 HP	30.8	10 HP	R4	IP20, UL Open	9.45 x 10.24 x 7.03	11.9	Interpolated
			ACx180-04y-055A-2	50.2	15 HP	50.2	15 HP	46.2	15 HP	R4	IP20, UL Open	9.45 x 10.24 x 7.03	11.9	Interpolated

Notes: 1. ABB Model Numbers ending in -0 and -1 indicate single-phase; -2 and -4 indicate three-phase. 2. 115-120V and 200-240V single-phase drives are identical other than the main board PCBA.

Table 7 - Certified Components - Drives - ACx180-04y - Wall Mounted, Continued

System Voltage [V]	Model	Construction	ABB Model Number	Normal Duty		Light Duty		Heavy Duty		Frame Size	Available Enclosure Types	Max Dimensions H x W x D [in]	Max Drive Weight [lb]	UUT
				Current [A]	kW / HP	Current [A]	kW / HP	Current [A]	kW / HP					
380-480	ACx180 x = S, or H	04y y = S, or N	ACS180-04y-01A8-4	1.6	0.75 HP	1.6	0.75 HP	1.1	0.5 HP	R0	IP20, UL Open	8.23 x 2.76 x 5.63	2.2	Interpolated
			ACS180-04y-02A6-4	2.1	1 HP	2.1	1 HP	1.6	0.75 HP	R0	IP20, UL Open	8.23 x 2.76 x 5.63	2.2	Interpolated
			ACS180-04y-03A3-4	3	1.5 HP	3	1.5 HP	2.1	1 HP	R0	IP20, UL Open	8.23 x 2.76 x 5.63	2.2	Interpolated
			ACx180-04y-04A0-4	3.5	2 HP	3.5	2 HP	3	1.5 HP	R1	IP20, UL Open	8.66 x 2.76 x 5.63	3	Interpolated
			ACx180-04y-05A6-4	4.7	3 HP	4.7	3 HP	3.4	2 HP	R1	IP20, UL Open	8.66 x 2.76 x 5.63	3	Interpolated
			ACx180-04y-07A2-4	6	3 HP	6	3 HP	4.8	3 HP	R1	IP20, UL Open	8.66 x 2.76 x 5.63	3	Interpolated
			ACx180-04y-09A4-4	7.6	5 HP	7.6	5 HP	6.3	3 HP	R1	IP20, UL Open	8.66 x 2.76 x 5.63	3	Interpolated
			ACx180-04y-12A6-4	11	7.5 HP	11	7.5 HP	7.6	5 HP	R2	IP20, UL Open	9.06 x 4.72 x 5.63	4.5	Interpolated
			ACx180-04y-17A0-4	14	10 HP	14	10 HP	11	7.5 HP	R2	IP20, UL Open	9.06 x 4.72 x 5.63	4.5	Interpolated
			ACx180-04y-25A0-4	21	15 HP	21	15 HP	14	10 HP	R3	IP20, UL Open	9.5 x 6.69 x 6.85	7.5	Interpolated
			ACx180-04y-033A-4	27	20 HP	27	20 HP	21	15 HP	R3	IP20, UL Open	9.5 x 6.69 x 6.85	7.5	Interpolated
			ACx180-04y-038A-4	34	25 HP	34	25 HP	27	20 HP	R4	IP20, UL Open	9.45 x 10.24 x 7.03	11.9	Interpolated
			ACx180-04y-045A-4	40	30 HP	40	30 HP	34	25 HP	R4	IP20, UL Open	9.45 x 10.24 x 7.03	11.9	Interpolated
			ACx180-04y-050A-4	42	30 HP	42	30 HP	40	30 HP	R4	IP20, UL Open	9.3 x 10.3 x 7.0	12.4	UUT-31A,B

- Notes:
1. ABB is the manufacturer for all units.
 2. For ACx180-04y-xxx-4(-2) both NEC and IEC ratings apply. Table shows only NEC rating.
 3. All units tested in rigid and isolated mounting configurations to $S_{DS}=2.0$ at $z/h=1.0$ & $S_{DS}=2.5$ at $z/h=0.0$ (or greater).
 4. ABB Model Numbers ending in -0 and -1 indicate single-phase; -2 and -4 indicate three-phase.

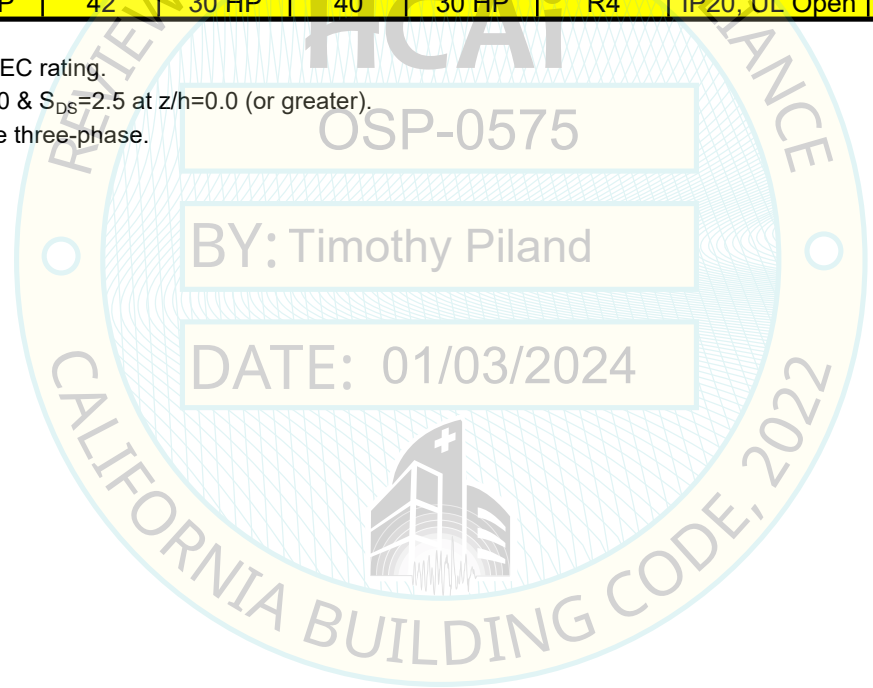


Table 8a - Certified Subcomponents: Fuses (Within Wall Mounted Units)

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
JJS-50A	Class T, 200kA, 600V, 50A	50A	0.1	Cooper Bussmann	Extrapolated
3AUA0000015604	15A, 600V, Class CC, REJ KTK-R-15	15A	< 0.1		UUT-05, UUT-22A,B, UUT-25A,B
3AUA0000015605	30A, 600V, Class CC, REJ KTK-R-30	30A	< 0.1		UUT-09
JJS-80	Class T, 200kA, 600V, 80A	80A	0.1		Interpolated
3AUA0000015607	100A, 600V, Class T, REJ JJS-100	100A	0.1		UUT-21, UUT-23A,B, UUT-26A,B
3AUA567001A15	100A, 600V,LPJ-100SP	100A	0.2		UUT-21
JJS-100	Class T, 200kA, 600V, 100A	100A	0.1		Interpolated
3AUA0000147985	40A,600VAC(T),V Fast Acting	40A	0.1		Interpolated
3AUA0000147986	50A,600VAC(T),V Fast Acting	50A	0.1		Interpolated
3AUA0000015606	60A, 600V, Class T, REJ	60A	0.1		UUT-07
3AUA0000147987	80A, 600VAC(T),V Fast Acting	80A	0.1		Interpolated
BG56720003-16	90A,600V,JJS-90	90A	0.1		UUT-06, UUT-08, UUT-10
JJS-150	Class T, 200kA, 600V, 150A	150A	0.2		UUT-16
3AXD50000050512	JJS-175, 600V	175A	0.2		Interpolated
JJS-200	Class T, 200kA, 600V, 200A	200A	0.2		Interpolated
3AXD50000050511	JJS-110, 600V	110A	0.2		Interpolated
JJS-110	Class T, 200kA, 600V, 110A	110A	0.2		Interpolated
3AUA0000147989	150A, 600VAC(T),V Fast Acting	150A	0.2		Interpolated
3AUA0000147990	200A, 600VAC(T),V Fast Acting	200A	0.2		Interpolated
JJS-175	Class T, 200kA, 600V, 175A	175A	0.2		Interpolated
JJS-350	Class T, 200kA, 600V, 350A	350A	0.5		UUT-18
JJS-250	Class T, 200kA, 600V, 250A	250A	0.5		Interpolated
JJS-300	Class T, 200kA, 600V, 300A	300A	0.5		UUT-24A,B
3AUA0000142381	225A, 600VAC(T)92X25,V Fast,BLH	225A	0.5		Interpolated
3AXD50000050513	JJS-250, 600V	250A	0.5		Interpolated
3AXD50000050514	JJS-300, 600V	300A	0.5		Interpolated
JJS-225	Class T, 200kA, 600V, 225A	225A	0.6		Interpolated
3AUA0000145948	350A, 600VAC(T),V Fast,BLH	350A	0.6		UUT-11
JJS-500	Class T, 200kA, 600V, 500A	500A	1.0		Extrapolated
JJS-600	Class T, 200kA, 600V, 600A	600A	1.0		Extrapolated
170M5x08	Bussmann 170M5x08, 690V, 400A	400A	0.7		Extrapolated
170M5x10	Bussmann 170M5x10, 690V, 500A	500A	0.7		Extrapolated
170M6x10	Bussmann 170M6x10, 690V, 630A	630A	1.5	Extrapolated	
170M6x11	Bussmann 170M6x11, 690V, 700A	700A	2.6	Extrapolated	
170M6x12	Bussmann 170M6x12, 690V, 800A	800A	2.6	Extrapolated	

Note: JJS Part Numbers are Bussman Part Numbers, and 3AU part numbers are ABB part numbers . Where "x" can be "0" (DIN 43653) or "4" (Flush End), or "6" US Style or "3" French Style. Semiconductor fuses listed in the tables above and throughout the document are base part numbers only.

Table 10a - Certified Subcomponents: Fans (Within Wall Mounted Units)

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
3AUA0000000148	Internal Cooling Fan	24 V	< 0.2	Delta Products Corp. / NMB Technologies Corp.	UUT-09
3AUA0000012736	Internal, 60mm, 38-40 CFM	24 V	< 0.2		Interpolated
3AXD50000026754	Axial	24 V	< 0.2		Interpolated
3AUA0000088115	Axial, 24V	24 V	< 0.2		UUT-08, UUT-10
3AUA0000012849	24Vdc	24 V	0.4		UUT-10, UUT-11
UF15KC12-BTH	ENCLOSURE FAN, 6", 293 CFM, 115 VAC	293 CFM	2.3	PFANNEN-BERG	UUT-16
11675154053	FILTERFAN, EXHAUST, 12" DIA, 297 CFM, 115 VAC (PF65000"A")	297 CFM	7.0		UUT-18
11677154050	FILTERFAN, SUPPLY, 12" DIA, 427 CFM, 115 VAC (PF67000 SL)	427 CFM	8.8		Extrapolated
11677154053	FILTERFAN, EXHAUST, 12" DIA, 427 CFM, 115 VAC (PF67000 SL A)	427 CFM	8.8		Extrapolated
UF15KC12-BTH	ENCLOSURE FAN, 6", 293 CFM, 115 VAC	293 CFM	2.3	MECHATRONICS	UUT-22A,B, UUT-23A,B, UUT-24A,B

DATE: 01/03/2024

Table 11a - Certified Subcomponents: Contactors (Within Wall Mounted Units)


ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
AF09-30-01-13	CONTACTOR, 3 POLE, 25A, 2/5/7.5HP, 100-250VAC/DC COIL, 1NC	25A	0.6	ABB	Extrapolated
3AXD50000017471	AX09-30-10-84	22A, 4kW at 400V	0.7		UUT-05, UUT-22A,B
3AXD50000017472	AX12-30-10-84	25A, 5.5kW at 400V	0.7		UUT-09, UUT-22A,B
3AXD50000017473	AX25-30-10-84	32A, 11kW at 400V	0.7		UUT-05
3AXD50000017474	AX32-30-10-84	55A, 15kW at 400V	1.5		Interpolated
3AXD50000017475	AX40-30-10-84	60A, 18.5kW at 400V	1.5		UUT-09
3AXD50000050428	AX50-30-00-84	100A, 22kW at 400V	2.2		UUT-06, UUT-10, UUT-16, UUT-23A,B
3AXD50000017477	AX80-30-00-84	125A, 37kW at 400V	2.2		UUT-06, UUT-10, UUT-16, UUT-23A,B
AX80-30-00-84	CONTACTOR, 3 POLE, 77/105A, 600VAC, 120VAC COIL	77/105A	2.5		UUT-16
3AXD50000050111	AX95-30-11-84	145A, 45kW at 400V	4.6		Interpolated
3AXD50000050113	AX150-30-11-84	190A, 75kW at 400V	4.6		Interpolated
AX150-30-11-84	CONTACTOR, 3 POLE, 125/170A, 600VAC, 120VAC COIL, 1NO, 1NC	125/170A	5.0		UUT-16
AX185-30-11-84	CONTACTOR, 3 POLE, 156/250A, 600VAC, 120VAC COIL, 1NO, 1NC	156/250A	8.0		UUT-18
3AXD50000050114	AX185-30-11-84	250A, 90kW at 400V	8.4		UUT-11
3AXD50000050115	AX205-30-11-84	275A, 110kW at 400V	8.4		UUT-27
AF265-30-00-97	CONTACTOR, 3 POLE, 350A, 75/200/250HP, 100-250VAC/DC (BXR)COIL, 1NO 1NC	350A	10.0		Interpolated
AF305-30-11-13	CONTACTOR 3Pole/600V/100-250Vcoil/305A/250Hp@480V	350A	10.0		Interpolated
AF370-30-11-13	CONTACTOR 3Pole/600V/100-250Vcoil/600A/300Hp@480V	600 A	10.0		Interpolated
3AXD50000050116	AF265-30-00-13	400A, 140kW at 400V	10.2		UUT-11

**Table 12a - Certified Subcomponents: Circuit Breakers - Type Code +F255
(Within Wall Mounted Units)**

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
XT1HU3060AFF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 60A, UL CURRENT LIMITING, 65KAIC	60A	3.1	ABB	Extrapolated
XT1HU3100AFF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 100A, UL CURRENT LIMITING, 65KAIC	100A	3.1		Extrapolated
3AXD50000049170	XT1H 100 TMF	100 A	3.1		Interpolated
3AXD50000049164	XT1H 15 TMF	15 A	3.1		UUT-05, UUT-22A,B, UUT-25A,B
3AXD50000049169	XT1H 60 TMF	65 A	3.1		UUT-07
3AXD50000049168	XT1H 35 TMF	35 A	3.1		UUT-09
3AXD50000136520	XT2L 70 TMF	70 A	3.5		Interpolated
3AXD50000136537	XT2L 100 TMA	100 A	3.5		UUT-06, UUT-10, UUT-23A,B
XT2LU3070AFF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 70A, UL CURRENT LIMITING, 100KAIC	70A	3.5		Interpolated
XT3SU3100AFF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 100A, UL CURRENT LIMITING, 35KAIC	100A	4.0		UUT-26A,B
3AXD50000049924	XT3S 225 TMF	225 A	4.6		Interpolated
3AXD50000049923	XT3S 125 TMF	125 A	4.6		UUT-08
XT3SU3125AFF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 125A, UL CURRENT LIMITING, 35KAIC	125A	4.6		UUT-16
XT3SU3225AFF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 225A, UL CURRENT LIMITING, 35KAIC	225A	4.6		UUT-24A,B, UUT-27
XT5HU340BBYF00 0XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 400A, UL CURRENT LIMITING	400A	8.0		Interpolated
XT5HU360BBFF00 0XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 600A, UL CURRENT LIMITING	600A	8.0		Interpolated
XT5LU360BBYF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 600A, UL CURRENT LIMITING	600A	8.0		Interpolated
3AXD50000146420	T5N400E5W	400 A	8.6		UUT-11
T5L400TW	CIRCUIT BREAKER, 600VAC, 400A, 3 POLE	400A	11.0		Interpolated
T5N400E5W	CIRCUIT BREAKER, 600VAC, 400A, 3 POLE, MAGNETIC ONLY, ELECTRONIC MCP, 25KAIC	400A	11.0		UUT-18

Table 13a - Certified Subcomponents: Fuse Blocks (Within Wall Mounted Units)

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
BMM603-1PQ	1 POLE FUSE BLOCK -SUPPLEMENTAL, 30A	30A	0.1	Cooper Bussmann	Extrapolated
BCM603-2PQ	2 POLE FUSE BLOCK - CLASS CC, 30A	30A	0.2		Extrapolated
3AUA0000142370	3 Pole, 31-60A, 600VAC, Class T	31-60A	0.6		UUT-07
FU0005A64	1 Pole, BSMN T60200-1C, 200A	101-200A	1.0		Interpolated
T60200-1C	1 POLE FUSE BLOCK - CLASS T, 200A	200A	1.0		UUT-16
T60400-1C	1 POLE FUSE BLOCK - CLASS T, 400A	400A	1.2		UUT-18, UUT-24A,B
3AUA0000142380	1 Pole, 600VAC, 400A, Class T	201-400A	1.3		UUT-11
3AUA0000142373	3 Pole, 61-100A,600V, Class T	61-100A	1.5		UUT-06, UUT-08, UUT-10, UUT-21
T60600-1C	1 POLE FUSE BLOCK - CLASS T, 600A	600A	2.5		Interpolated
BCM603-3PQ	3 POLE FUSE BLOCK - CLASS CC, 30A	30A	0.3		UUT-22A,B, UUT-25A,B
TM60060-3CR	3 POLE FUSE BLOCK - CLASS T, 60A	60A	0.6		Interpolated
TM60100-3CR	3 POLE FUSE BLOCK - CLASS T, 100A	100A	1.0		UUT-23A,B, UUT-24A,B

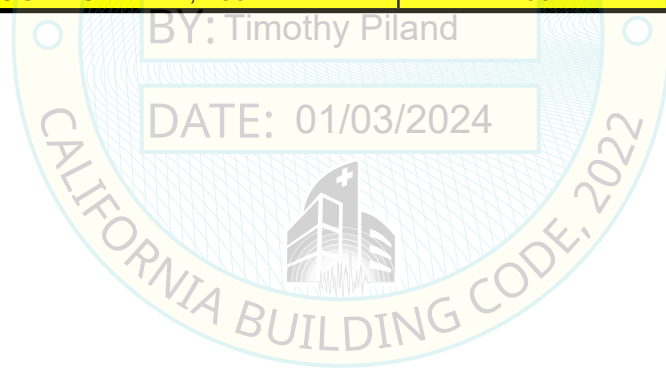

**Table 14a - Certified Subcomponents: Disconnect Switches / Service Switches
(Within Wall Mounted Units)**

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
3AUA0000049777	Disconnect Switch	100A	0.8	ABB	UUT-06, UUT-10, UUT-21, UUT-23A,B
3AXD50000049831	OT30F	30A	0.8		UUT-05, UUT-09, UUT-22A,B
3AXD50000049832	OT60F	60A	0.8		Interpolated
3AUA0000019627	Disconnect Switch	200A	1.2		Interpolated
OT200U03	DISCONNECT SWITCH, 200A, 3P, 600VAC, 200HP @ 480V	200A	3.3		Interpolated
3AXD50000139828	XT2D	125A	3.5		Interpolated
T5H400DW	MOLDED CASE SWITCH, 600VAC, 400A, 3 POLE, MAGNETIC ONLY, 65KA	400A	4.2		Interpolated
T5L600DW	MOLDED CASE SWITCH, 600VAC, 600A, 3 POLE, MAGNETIC ONLY, 100KA	600A	4.2		Interpolated
T5H600DW	MOLDED CASE SWITCH, 600VAC, 600A, 3 POLE, MAGNETIC ONLY, 65KA	600A	4.2		Interpolated
T5L400DW	MOLDED CASE SWITCH, 600VAC, 400A, 3 POLE,		4.15		Interpolated
T5L600DW	MOLDED CASE SWITCH, 600VAC, 600A, 3 POLE,		4.15		Interpolated
OT400U03	DISCONNECT SWITCH, 400A, 3P, 600VAC, 250HP @ 480V	400A	6.7		Interpolated
3AXD50000049819	OT400U03	400 A	6.7		UUT-11

Table 15a - Certified Subcomponents: Filters (Within Wall Mounted Units)

ABB Part Number	Description	Material	Weight [lb]	MFR	UUT
11760004050	GRILL AND FILTER, 12" (PFA 60000)	type 12	1.5	PFANNEN-BERG	UUT-18
3AUA0000004887	Filter air, precut 150*300*12.5 mm	polyester/plastic	< 0.2	Tex Air	UUT-11

Table 16a - Certified Subcomponents: Current Transformers (Within Wall Mounted Units)

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
3AUA0000014759	Current Transformer (CT)	25:1	0.4	ABB	UUT-05, UUT-09
X4150PSF1	CONTROL TRANSFORMER, 150VA, PRI: 460/230V, SEC: 115/24V	150VA	9.0		UUT-16,UUT-22A,B, UUT-23A,B
X4250PSF1	CONTROL TRANSFORMER, 250VA, PRI: 460/230V, SEC: 115/24V	250VA	11.0		UUT-18, UUT-24A,B,
X4500PSF1	CONTROL TRANSFORMER, 500VA, PRI: 460/230V, SEC: 115/24V	500VA	22.0		Extrapolated
X4750PS1	CONTROL TRANSFORMER, 750VA, PRI: 460/230V, SEC: 115V	750VA	25.0		Extrapolated
X41K1	CONTROL TRANSFORMER, 1000VA, PRI: 460/230V, SEC: 115/24V	1000VA	33.0		Extrapolated
3AUA476001B24	Current Transformer (CT)	200:5	0.4	Tyco Electronics/ Narayan Powertech Pvt. Ltd./ Instrument Transformer Technologies, LLC	UUT-11
3AUA0000014760	Current Transformer (CT)	75:1	0.4		UUT-06, UUT-10, UUT-21
3AUA0000004443	Current Transformer (CT)	300:5	0.4		Interpolated
3AUA476001B25	Current Transformer (CT)	500:5	1.0		UUT-11

**Table 17a - Certified Subcomponents: Reactors - Type Code +E213
(Within Wall Mounted Units)**

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
3AUA0000008409	MOV for 230V Line Reactor	230 Volts at 240 Joules	0.4	ABB	Extrapolated
3AUA0000008410	MOV for 480V Line Reactor	480 Volts at 470 Joules	0.4		UUT-09, UUT-10
3AUA0000008411	MOV for 600V Line Reactor	600 Volts at 300 Joules	0.4		Interpolated
3AUA0000015536	AC Line Reactor R1 1.2mH,12A Continuous-NEW TYPE 12	1.2mH, 12A	5.4		Interpolated
3AUA0000015537	AC Line Reactor R2 0.42mH,31A Continuous-NEW TYPE 12	0.42mH, 31A	6.6		UUT-09
3AUA0000015538	AC Line Reactor R3 0.33mH,59A Continuous-NEW TYPE 12	0.33mH, 59A	15.8		Interpolated
3AUA0000015539	AC Line Reactor R4 0.18mH,75A Continuous-NEW TYPE 12	0.18mH, 75A	16.0		UUT-10
KDRF25L	LINE REACTOR, 40HP, 208/240VAC, 3%, UL OPEN, 114A	114a	30.0	TCI	Interpolated
KDRF26L	LINE REACTOR, 50HP, 208/240VAC, 3%, UL OPEN, 143A	143a	30.0		Interpolated
KDRF24L	LINE REACTOR, 30HP, 208/240VAC, 3%, UL OPEN, 88A	88a	30.0		Interpolated
KDRF3L	LINE REACTOR, 75HP, 480VAC, 3%, UL OPEN, 96A	96a	30.0		UUT-16
KDRH3L	LINE REACTOR, 100HP, 480VAC, 3%, UL OPEN, 124A	124a	40.0		Interpolated
KDRH2L	LINE REACTOR, 125HP, 480VAC, 3%, UL OPEN, 156A	156a	40.0		Interpolated
KDRH1L	LINE REACTOR, 150HP, 480VAC, 3%, UL OPEN, 180A	180a	40.0		Interpolated
KDRH22L	LINE REACTOR, 60HP, 208/240VAC, 3%, UL OPEN, 169A	169a	45.0		Interpolated
KDRI23L	LINE REACTOR, 75HP, 208/240VAC, 3%, UL OPEN, 211A	211a	50.0		Interpolated
KDRI24L	LINE REACTOR, 100HP, 208/240VAC, 3%, UL OPEN, 273A	273a	50.0		UUT-18

Table 8b - Certified Subcomponents: Fuses (Within Floor Mounted Units)

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
JJS-50A	Class T, 200kA, 600V, 50A	50A	0.1	Cooper Bussmann	Extrapolated
3AUA0000015604	15A, 600V, Class CC, REJ KTK-R-15	15A	< 0.1		Extrapolated
3AUA0000015605	30A, 600V, Class CC, REJ KTK-R-30	30A	< 0.1		Extrapolated
JJS-80	Class T, 200kA, 600V, 80A	80A	0.1		Extrapolated
3AUA0000015607	100A, 600V, Class T, REJ JJS-100	100A	0.1		Extrapolated
3AUA567001A15	100A, 600V,LPJ-100SP	100A	0.2		Extrapolated
JJS-100	Class T, 200kA, 600V, 100A	100A	0.1		Extrapolated
3AUA0000147985	40A,600VAC(T),V Fast Acting	40A	0.1		Extrapolated
3AUA0000147986	50A,600VAC(T),V Fast Acting	50A	0.1		Extrapolated
3AUA0000015606	60A, 600V, Class T, REJ	60A	0.1		Extrapolated
3AUA0000147987	80A, 600VAC(T),V Fast Acting	80A	0.1		Extrapolated
BG56720003-16	90A,600V,JJS-90	90A	0.1		Extrapolated
JJS-150	Class T, 200kA, 600V, 150A	150A	0.2		Extrapolated
3AXD50000050512	JJS-175, 600V	175A	0.2		Extrapolated
JJS-200	Class T, 200kA, 600V, 200A	200A	0.2		Extrapolated
3AXD50000050511	JJS-110, 600V	110A	0.2		Extrapolated
JJS-110	Class T, 200kA, 600V, 110A	110A	0.2		Extrapolated
3AUA0000147989	150A, 600VAC(T),V Fast Acting	150A	0.2		Extrapolated
3AUA0000147990	200A, 600VAC(T),V Fast Acting	200A	0.2		Extrapolated
JJS-175	Class T, 200kA, 600V, 175A	175A	0.2		Extrapolated
JJS-350	Class T, 200kA, 600V, 350A	350A	0.5		UUT-17, UUT-18
JJS-250	Class T, 200kA, 600V, 250A	250A	0.5		Interpolated
JJS-300	Class T, 200kA, 600V, 300A	300A	0.5		Interpolated
3AUA0000142381	225A, 600VAC(T)92X25,V Fast,BLH	225A	0.5		Interpolated
3AXD50000050513	JJS-250, 600V	250A	0.5		Interpolated
3AXD50000050514	JJS-300, 600V	300A	0.5		Interpolated
JJS-225	Class T, 200kA, 600V, 225A	225A	0.6		Interpolated
3AUA0000145948	350A, 600VAC(T),V Fast,BLH	350A	0.6		Interpolated
JJS-500	Class T, 200kA, 600V, 500A	500A	1.0		Interpolated
JJS-600	Class T, 200kA, 600V, 600A	600A	1.0		UUT-19, UUT-20
170M5x08	Bussmann 170M5x08, 690V, 400A	400A	0.7	Extrapolated	
170M5x10	Bussmann 170M5x10, 690V, 500A	500A	0.7	Extrapolated	
170M6x10	Bussmann 170M6x10, 690V, 630A	630A	1.5	Extrapolated	
170M6x11	Bussmann 170M6x11, 690V, 700A	700A	2.6	Extrapolated	
170M6x12	Bussmann 170M6x12, 690V, 800A	800A	2.6	Extrapolated	

Note: JJS Part Numbers are Bussman Part Numbers, and 3AU part numbers are ABB part numbers. Where "x" can be "0" (DIN 43653) or "4" (Flush End), or "6" US Style or "3" French Style. Fuse Semiconductor fuses listed in the tables above and throughout the document are base part numbers only.

Table 10b - Certified Subcomponents: Fans (Within Floor Mounted Units)

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
UF15KC12-BTH	ENCLOSURE FAN, 6", 293 CFM, 115 VAC	293 CFM	2.3	PFANNEN- BERG	Extrapolated
11675154053	FILTERFAN, EXHAUST, 12" DIA, 297 CFM, 115 VAC (PF65000"A")	297 CFM	7.0		Extrapolated
11677154050	FILTERFAN, SUPPLY, 12" DIA. 427 CFM, 115 VAC (PF67000 SL)	427 CFM	8.8		UUT-17, UUT-19, UUT-20
11677154053	FILTERFAN, EXHAUST, 12" DIA. 427 CFM, 115 VAC (PF67000 SL A)	427 CFM	8.8		UUT-19, UUT-20



Table 11b - Certified Subcomponents: Contactors (Within Floor Mounted Units)

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
AF09-30-01-13	CONTACTOR, 3 POLE, 25A, 2/5/7.5HP, 100-250VAC/DC COIL, 1NC	25A	0.6	ABB	UUT-19, UUT-20
3AXD50000017471	AX09-30-10-84	22A, 4kW at 400V	0.7		Interpolated
3AXD50000017472	AX12-30-10-84	25A, 5.5kW at 400V	0.7		Interpolated
3AXD50000017473	AX25-30-10-84	32A, 11kW at 400V	0.7		Interpolated
3AXD50000017474	AX32-30-10-84	55A, 15kW at 400V	1.5		Interpolated
3AXD50000017475	AX40-30-10-84	60A, 18.5kW at 400V	1.5		Interpolated
3AXD50000050428	AX50-30-00-84	100A, 22kW at 400V	2.2		Interpolated
3AXD50000017477	AX80-30-00-84	125A, 37kW at 400V	2.2		Interpolated
AX80-30-00-84	CONTACTOR, 3 POLE, 77/105A, 600VAC, 120VAC COIL	77/105A	2.5		Interpolated
3AXD50000050111	AX95-30-11-84	145A, 45kW at 400V	4.6		Interpolated
3AXD50000050113	AX150-30-11-84	190A, 75kW at 400V	4.6		Interpolated
AX150-30-11-84	CONTACTOR, 3 POLE, 125/170A, 600VAC, 120VAC COIL, 1NO, 1NC	125/170A	5.0		Interpolated
AX185-30-11-84	CONTACTOR, 3 POLE, 156/250A, 600VAC, 120VAC COIL, 1NO, 1NC	156/250A	8.0		UUT-17
3AXD50000050114	AX185-30-11-84	250A, 90kW at 400V	8.4		Interpolated
3AXD50000050115	AX205-30-11-84	275A, 110kW at 400V	8.4		Interpolated
AF265-30-00-97	CONTACTOR, 3 POLE, 350A, 75/200/250HP, 100-250VAC/DC (BXR)COIL, 1NO 1NC	350A	10.0		UUT-17
3AXD50000050116	AF265-30-00-13	400A, 140kW at 400V	10.2		Interpolated
AF305-30-11-13	CONTACTOR 3Pole/600V/100-250Vcoil/305A/250Hp@480V	350A	10.0		Interpolated
AF370-30-11-13	CONTACTOR 3Pole/600V/100-250Vcoil/600A/300Hp@480V	600 A	10.0		Interpolated
AF400-30-11-70	CONTACTOR, 3 POLE, 550A, 125/350/400HP, 100-250VAC/DC COIL, 1NO 1NC	550A	27.0		UUT-20
AF460-30-11-70	CONTACTOR, 3 POLE, 150/400/500HP, 100-250VAC/DC COIL, 1NO 1NC	650 A	27.0	UUT-20	

**Table 12b - Certified Subcomponents: Circuit Breakers - Type Code +F255
(Within Floor Mounted Units)**

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
XT1HU3060AFF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 60A, UL CURRENT LIMITING, 65KAIC	60A	3.1	ABB	Interpolated
XT1HU3100AFF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 100A, UL CURRENT LIMITING, 65KAIC	100A	3.1		Interpolated
3AXD50000049170	XT1H 100 TMF	100 A	3.1		Interpolated
3AXD50000049164	XT1H 15 TMF	15 A	3.1		Interpolated
3AXD50000049169	XT1H 60 TMF	65 A	3.1		Interpolated
3AXD50000049168	XT1H 35 TMF	35 A	3.1		Interpolated
3AXD50000136520	XT2L 70 TMF	70 A	3.5		Interpolated
3AXD50000136537	XT2L 100 TMA	100 A	3.5		Interpolated
XT2LU3070AFF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 70A, UL CURRENT LIMITING, 100KAIC	70A	3.5		Interpolated
XT3SU3100AFF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 100A, UL CURRENT LIMITING, 35KAIC	100A	4.0		Interpolated
3AXD50000049924	XT3S 225 TMF	225 A	4.6		Interpolated
3AXD50000049923	XT3S 125 TMF	125 A	4.6		Interpolated
XT3SU3125AFF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 125A, UL CURRENT LIMITING, 35KAIC	125A	4.6		Interpolated
XT3SU3225AFF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 225A, UL CURRENT LIMITING, 35KAIC	225A	4.6		Interpolated
XT5HU340BBYF00 0XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 400A, UL CURRENT LIMITING	400A	8.0		Interpolated
XT5HU360BBFF00 0XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 600A, UL CURRENT LIMITING	600A	8.0		Interpolated
XT5LU360BBYF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 600A, UL CURRENT LIMITING	600A	8.0		Interpolated
3AXD50000146420	T5N400E5W	400 A	8.6		Interpolated
T5L400TW	CIRCUIT BREAKER, 600VAC, 400A, 3 POLE	400A	11.0		Interpolated
T5N400E5W	CIRCUIT BREAKER, 600VAC, 400A, 3 POLE, MAGNETIC ONLY, ELECTRONIC MCP, 25KAIC	400A	11.0		UUT-17
T5L600BW	CIRCUIT BREAKER, 600VAC, 600A, 3 POLE, ELECTRONIC TRIP UNIT, 100KAIC	600A	11.0	UUT-19, UUT-20	

Table 13b - Certified Subcomponents: Fuse Blocks (Within Floor Mounted Units)

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
BMM603-1PQ	1 POLE FUSE BLOCK -SUPPLEMENTAL, 30A	30A	0.1	Cooper Bussmann	UUT-20
BCM603-2PQ	2 POLE FUSE BLOCK - CLASS CC, 30A	30A	0.2		UUT-20
3AUA0000142370	3 Pole, 31-60A, 600VAC, Class T	31-60A	0.6		Extrapolated
FU0005A64	1 Pole, BSMN T60200-1C, 200A	101-200A	1.0		Extrapolated
T60200-1C	1 POLE FUSE BLOCK - CLASS T, 200A	200A	1.0		Extrapolated
T60400-1C	1 POLE FUSE BLOCK - CLASS T, 400A	400A	1.2		UUT-17
3AUA0000142380	1 Pole, 600VAC, 400A, Class T	201-400A	1.3		Interpolated
3AUA0000142373	3 Pole, 61-100A,600V, Class T	61-100A	1.5		Interpolated
T60600-1C	1 POLE FUSE BLOCK - CLASS T, 600A	600A	2.5		UUT-19
BCM603-3PQ	3 POLE FUSE BLOCK - CLASS CC, 30A	30A	0.3		Extrapolated
TM60060-3CR	3 POLE FUSE BLOCK - CLASS T, 60A	60A	0.6		Extrapolated
TM60100-3CR	3 POLE FUSE BLOCK - CLASS T, 100A	100A	1.0		Extrapolated

Table 14b - Certified Subcomponents: Disconnect Switches / Service Switches (Within Floor Mounted Units)

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
T5L600DW	MOLDED CASE SWITCH, 600VAC, 600A, 3 POLE, MAGNETIC ONLY, 100KA	600A	4.2	ABB	UUT-20

Table 15b - Certified Subcomponents: Filters (Within Floor Mounted Units)

ABB Part Number	Description	Material	Weight [lb]	MFR	UUT
11760004050	GRILL AND FILTER, 12" (PFA 60000)	type 12	1.5	PFANNEN- BERG	UUT-17, UUT-19

Table 16b - Certified Subcomponents: Current Transformers (Within Floor Mounted Units)

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
3AUA0000014759	Current Transformer (CT)	25:1	0.4	ABB	Extrapolated
X4150PSF1	CONTROL TRANSFORMER, 150VA, PRI: 460/230V, SEC: 115/24V	150VA	9.0		Extrapolated
X4250PSF1	CONTROL TRANSFORMER, 250VA, PRI: 460/230V, SEC: 115/24V	250VA	11.0		UUT-17
X4500PSF1	CONTROL TRANSFORMER, 500VA, PRI: 460/230V, SEC: 115/24V	500VA	22.0		Interpolated
X4750PS1	CONTROL TRANSFORMER, 750VA, PRI: 460/230V, SEC: 115V	750VA	25.0		UUT-19
X41K1	CONTROL TRANSFORMER, 1000VA, PRI: 460/230V, SEC: 115/24V	1000VA	33.0		UUT-20

**Table 17b - Certified Subcomponents: Reactors - Type Code +E213
(Within Floor Mounted Units)**

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
KDRF25L	LINE REACTOR, 40HP, 208/240VAC, 3%, UL OPEN, 114A	114a	30.0	TCI	Interpolated
KDRF26L	LINE REACTOR, 50HP, 208/240VAC, 3%, UL OPEN, 143A	143a	30.0		Interpolated
KDRF24L	LINE REACTOR, 30HP, 208/240VAC, 3%, UL OPEN, 88A	88a	30.0		Interpolated
KDRF3L	LINE REACTOR, 75HP, 480VAC, 3%, UL OPEN, 96A	96a	30.0		Interpolated
KDRH3L	LINE REACTOR, 100HP, 480VAC, 3%, UL OPEN, 124A	124a	40.0		Interpolated
KDRH2L	LINE REACTOR, 125HP, 480VAC, 3%, UL OPEN, 156A	156a	40.0		Interpolated
KDRH1L	LINE REACTOR, 150HP, 480VAC, 3%, UL OPEN, 180A	180a	40.0		Interpolated
KDRH22L	LINE REACTOR, 60HP, 208/240VAC, 3%, UL OPEN, 169A	169a	45.0		Interpolated
KDRI23L	LINE REACTOR, 75HP, 208/240VAC, 3%, UL OPEN, 211A	211a	50.0		Interpolated
KDRI24L	LINE REACTOR, 100HP, 208/240VAC, 3%, UL OPEN, 273A	273a	50.0		Interpolated
KDRG3L	LINE REACTOR, 200HP, 480VAC, 3%, UL OPEN, 240A	240a	65.0		UUT-17
KDRG1L	LINE REACTOR, 250HP, 480VAC, 3%, UL OPEN, 302A	302a	65.0		Interpolated
KDRG2L	LINE REACTOR, 300HP, 480VAC, 3%, UL OPEN, 361A	361a	65.0		Interpolated
KDRJ2L	LINE REACTOR, 350HP, 480VAC, 3%, UL OPEN, 414A	414a	70.0		UUT-19



**Table 8c - Certified Subcomponents: Fuses
(Within Combination Floor and Wall Mounted Units)**

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
JJS-50A	Class T, 200kA, 600V, 50A	50A	0.1	Cooper Bussmann	Extrapolated
3AUA0000015604	15A, 600V, Class CC, REJ KTK-R-15	15A	< 0.1		Extrapolated
3AUA0000015605	30A, 600V, Class CC, REJ KTK-R-30	30A	< 0.1		Extrapolated
JJS-80	Class T, 200kA, 600V, 80A	80A	0.1		Extrapolated
3AUA0000015607	100A, 600V, Class T, REJ JJS-100	100A	0.1		Extrapolated
3AUA567001A15	100A, 600V, LPJ-100SP	100A	0.2		Extrapolated
JJS-100	Class T, 200kA, 600V, 100A	100A	0.1		Extrapolated
3AUA0000147985	40A, 600VAC(T), V Fast Acting	40A	0.1		Extrapolated
3AUA0000147986	50A, 600VAC(T), V Fast Acting	50A	0.1		Extrapolated
3AUA0000015606	60A, 600V, Class T, REJ	60A	0.1		Extrapolated
3AUA00000147987	80A, 600VAC(T), V Fast Acting	80A	0.1		Extrapolated
BG56720003-16	90A, 600V, JJS-90	90A	0.1		Extrapolated
JJS-150	Class T, 200kA, 600V, 150A	150A	0.2		Extrapolated
3AXD50000050512	JJS-175, 600V	175A	0.2		Extrapolated
JJS-200	Class T, 200kA, 600V, 200A	200A	0.2		Extrapolated
3AXD50000050511	JJS-110, 600V	110A	0.2		Extrapolated
JJS-110	Class T, 200kA, 600V, 110A	110A	0.2		Extrapolated
3AUA0000147989	150A, 600VAC(T), V Fast Acting	150A	0.2		Extrapolated
3AUA0000147990	200A, 600VAC(T), V Fast Acting	200A	0.2		Extrapolated
JJS-175	Class T, 200kA, 600V, 175A	175A	0.2		Extrapolated
JJS-350	Class T, 200kA, 600V, 350A	350A	0.5		Extrapolated
JJS-250	Class T, 200kA, 600V, 250A	250A	0.5		Extrapolated
JJS-300	Class T, 200kA, 600V, 300A	300A	0.5		UUT-27
3AUA0000142381	225A, 600VAC(T)92X25, V Fast, BLH	225A	0.5		Interpolated
3AXD50000050513	JJS-250, 600V	250A	0.5		Interpolated
3AXD50000050514	JJS-300, 600V	300A	0.5		Interpolated
JJS-225	Class T, 200kA, 600V, 225A	225A	0.6		Interpolated
3AUA0000145948	350A, 600VAC(T), V Fast, BLH	350A	0.6		Interpolated
JJS-500	Class T, 200kA, 600V, 500A	500A	1.0		Interpolated
JJS-600	Class T, 200kA, 600V, 600A	600A	1.0		Interpolated
170M5x08	Bussmann 170M5x08, 690V, 400A	400A	0.7		Interpolated
170M5x10	Bussmann 170M5x10, 690V, 500A	500A	0.7		Interpolated
170M6x10	Bussmann 170M6x10, 690V, 630A	630A	1.5	Interpolated	
170M6x11	Bussmann 170M6x11, 690V, 700A	700A	2.6	Interpolated	
170M6x12	Bussmann 170M6x12, 690V, 800A	800A	2.6	UUT-28, UUT-29	

Note: JJS Part Numbers are Bussman Part Numbers, and 3AU part numbers are ABB part numbers

Where "x" can be "0" (DIN 43653) or "4" (Flush End), or "6" US Style or "3" French Style Fuse Semiconductor fuses listed in the tables above and throughout the document are base part numbers only.

**Table 10c - Certified Subcomponents: Fans
(Within Combination Floor and Wall Mounted Units)**

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
UF15KC12-BTH	ENCLOSURE FAN, 6", 293 CFM, 115 VAC	293 CFM	2.3	MECHATRONICS	UUT-27
3243.110	FAN 13" 353/289/330/284 CFM 110VAC/60Hz	284 CFM	7.9	Rittal	UUT-28, UUT-29
3244.110	FAN 13" 424/359/406/322 CFM 110VAC/60HZ	322 CFM	9.5		Interpolated
3139.110	ROOF FAN 13" 323/229/252 CFM 110VAC/60HZ	252 CFM	11.5		Interpolated
3140.110	ROOF FAN 13" 518/359/412 CFM 115VAC/60HZ	412 CFM	13.2		UUT-28, UUT-29



**Table 11c - Certified Subcomponents: Contactors
(Within Combination Floor and Wall Mounted Units)**


ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
AF09-30-01-13	CONTACTOR, 3 POLE, 25A, 2/5/7.5HP, 100-250VAC/DC COIL, 1NC	25A	0.6	ABB	Extrapolated
3AXD50000017471	AX09-30-10-84	22A, 4kW at 400V	0.7		Extrapolated
3AXD50000017472	AX12-30-10-84	25A, 5.5kW at 400V	0.7		Extrapolated
3AXD50000017473	AX25-30-10-84	32A, 11kW at 400V	0.7		Extrapolated
3AXD50000017474	AX32-30-10-84	55A, 15kW at 400V	1.5		Extrapolated
3AXD50000017475	AX40-30-10-84	60A, 18.5kW at 400V	1.5		Extrapolated
3AXD50000050428	AX50-30-00-84	100A, 22kW at 400V	2.2		Extrapolated
3AXD50000017477	AX80-30-00-84	125A, 37kW at 400V	2.2		Extrapolated
AX80-30-00-84	CONTACTOR, 3 POLE, 77/105A, 600VAC, 120VAC COIL	77/105A	2.5		Extrapolated
3AXD50000050111	AX95-30-11-84	145A, 45kW at 400V	4.6		Extrapolated
3AXD50000050113	AX150-30-11-84	190A, 75kW at 400V	4.6		Extrapolated
AX150-30-11-84	CONTACTOR, 3 POLE, 125/170A, 600VAC, 120VAC COIL, 1NO, 1NC	125/170A	5.0		Extrapolated
AX185-30-11-84	CONTACTOR, 3 POLE, 156/250A, 600VAC, 120VAC COIL, 1NO, 1NC	156/250A	8.0		UUT-27
3AXD50000050114	AX185-30-11-84	250A, 90kW at 400V	8.4		Interpolated
3AXD50000050115	AX205-30-11-84	275A, 110kW at 400V	8.4		UUT-27
AF265-30-00-97	CONTACTOR, 3 POLE, 350A, 75/200/250HP, 100-250VAC/DC (BXR)COIL, 1NO 1NC	350A	10.0		Interpolated
3AXD50000050116	AF265-30-00-13	400A, 140kW at 400V	10.2		Interpolated
AF305-30-11-13	CONTACTOR 3Pole/600V/100-250Vcoil/305A/250Hp@480V	350A	10.0		Interpolated
AF370-30-11-13	CONTACTOR 3Pole/600V/100-250Vcoil/600A/300Hp@480V	600 A	10.0		Interpolated
AF400-30-11-70	CONTACTOR, 3 POLE, 550A, 125/350/400HP, 100-250VAC/DC COIL, 1NO 1NC	550A	27.0		UUT-28
AF460-30-11-70	CONTACTOR, 3 POLE, 150/400/500HP, 100-250VAC/DC COIL, 1NO 1NC	650 A	27.0	UUT-28	

**Table 12c - Certified Subcomponents: Circuit Breakers - Type Code +F255
(Within Floor Mounted Units)**

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
XT1HU3060AFF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 60A, UL CURRENT LIMITING, 65KAIC	60A	3.1	ABB	Extrapolated
XT1HU3100AFF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 100A, UL CURRENT LIMITING, 65KAIC	100A	3.1		Extrapolated
3AXD50000049170	XT1H 100 TMF	100 A	3.1		Extrapolated
3AXD50000049164	XT1H 15 TMF	15 A	3.1		Extrapolated
3AXD50000049169	XT1H 60 TMF	65 A	3.1		Extrapolated
3AXD50000049168	XT1H 35 TMF	35 A	3.1		Extrapolated
3AXD50000136520	XT2L 70 TMF	70 A	3.5		Extrapolated
3AXD50000136537	XT2L 100 TMA	100 A	3.5		Extrapolated
XT2LU3070AFF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 70A, UL CURRENT LIMITING, 100KAIC	70A	3.5		Extrapolated
XT3SU3100AFF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 100A, UL CURRENT LIMITING, 35KAIC	100A	4.0		Extrapolated
3AXD50000049924	XT3S 225 TMF	225 A	4.6		Extrapolated
3AXD50000049923	XT3S 125 TMF	125 A	4.6		Extrapolated
XT3SU3125AFF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 125A, UL CURRENT LIMITING, 35KAIC	125A	4.6		Extrapolated
XT3SU3225AFF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 225A, UL CURRENT LIMITING, 35KAIC	225A	4.6		UUT-27
XT5HU340BBYF00 0XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 400A, UL CURRENT LIMITING	400A	8.0		Interpolated
XT5HU360BBFF00 0XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 600A, UL CURRENT LIMITING	600A	8.0		Interpolated
XT5LU360BBYF000 XXX	XT CIRCUIT BREAKER, 480VAC, 3 POLE, 600A, UL CURRENT LIMITING	600A	8.0		Interpolated
3AXD50000146420	T5N400E5W	400 A	8.6		Interpolated
T5L400TW	CIRCUIT BREAKER, 600VAC, 400A, 3 POLE	400A	11.0		Interpolated
T5N400E5W	CIRCUIT BREAKER, 600VAC, 400A, 3 POLE, MAGNETIC ONLY, ELECTRONIC MCP, 25KAIC	400A	11.0		Interpolated
T5L600BW	CIRCUIT BREAKER, 600VAC, 600A, 3 POLE, ELECTRONIC TRIP UNIT, 100KAIC	600A	11.0	UUT28, UUT-29	

**Table 13c - Certified Subcomponents: Fuse Blocks
(Within Combination Floor and Wall Mounted Units)**

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
BMM603-1PQ	1 POLE FUSE BLOCK - SUPPLEMENTAL, 30A	30A	0.1	Cooper Bussmann	Extrapolated
BCM603-2PQ	2 POLE FUSE BLOCK - CLASS CC, 30A	30A	0.2		Extrapolated
3AUA0000142370	3 Pole, 31-60A, 600VAC, Class T	31-60A	0.6		Extrapolated
FU0005A64	1 Pole, BSMN T60200-1C, 200A	101-200A	1.0		Extrapolated
T60200-1C	1 POLE FUSE BLOCK - CLASS T, 200A	200A	1.0		Extrapolated
T60400-1C	1 POLE FUSE BLOCK - CLASS T, 400A	400A	1.2		UUT-27
3AUA0000142380	1 Pole, 600VAC, 400A, Class T	201-400A	1.3		Extrapolated
3AUA0000142373	3 Pole, 61-100A,600V, Class T	61-100A	1.5		Extrapolated
T60600-1C	1 POLE FUSE BLOCK - CLASS T, 600A	600A	2.5		Extrapolated
BCM603-3PQ	3 POLE FUSE BLOCK - CLASS CC, 30A	30A	0.3		Extrapolated
TM60060-3CR	3 POLE FUSE BLOCK - CLASS T, 60A	60A	0.6		Extrapolated
TM60100-3CR	3 POLE FUSE BLOCK - CLASS T, 100A	100A	1.0		Extrapolated
LSCR002	Modular Style Semiconductor Fuse Blocks	800A	1.0	Littlefuse	UUT-28, UUT-29

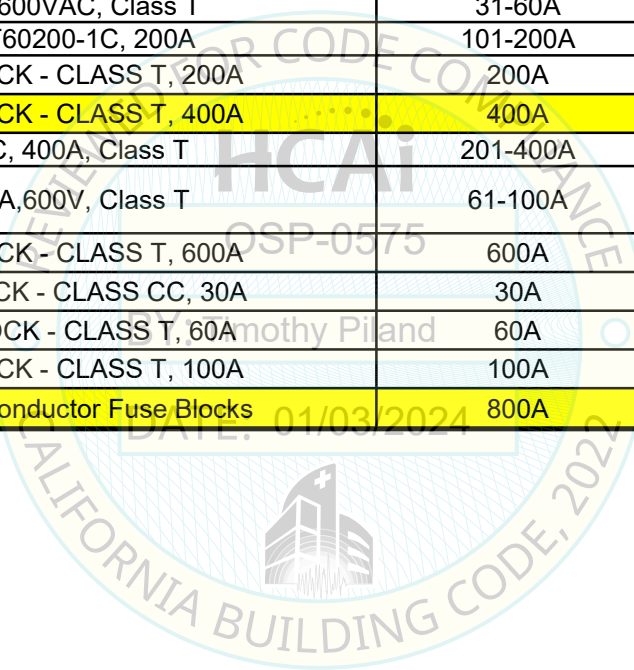

**Table 14c - Certified Subcomponents: Disconnect Switches / Service Switches
(Within Combination Floor and Wall Mounted Units)**

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
3AUA0000049777	Disconnect Switch	100A	0.8	ABB	Extrapolated
3AXD50000049831	OT30F	30A	0.8		Extrapolated
3AXD50000049832	OT60F	60A	0.8		Extrapolated
3AUA0000019627	Disconnect Switch	200A	1.2		Extrapolated
OT200U03	DISCONNECT SWITCH, 200A, 3P, 600VAC, 200HP @ 480V	200A	3.3		UUT-27
3AXD50000139828	XT2D	125A	3.5		Interpolated
T5H400DW	MOLDED CASE SWITCH, 600VAC, 400A, 3 POLE, MAGNETIC ONLY, 65KA	400A	4.2		Interpolated
T5L600DW	MOLDED CASE SWITCH, 600VAC, 600A, 3 POLE, MAGNETIC ONLY, 100KA	600A	4.2		Interpolated
T5H600DW	MOLDED CASE SWITCH, 600VAC, 600A, 3 POLE, MAGNETIC ONLY, 65KA	600A	4.2		UUT-28
T5L400DW	MOLDED CASE SWITCH, 600VAC, 400A, 3 POLE,		4.15		Extrapolated
T5L600DW	MOLDED CASE SWITCH, 600VAC, 600A, 3 POLE,		4.15		Extrapolated
OT400U03	DISCONNECT SWITCH, 400A, 3P, 600VAC, 250HP @ 480V	400A	6.7		Extrapolated
3AXD50000049819	OT400U03	400 A	6.7		Extrapolated

**Table 16c - Certified Subcomponents: Current Transformers
(Within Combination Floor and Wall Mounted Units)**

ABB Part Number	Description	Rating	Weight [lb]	MFR	UUT
9070TF750D1	XFMR/750 VA/460Vac PRI/120Vac SEC w/FUS	750VA	18	Schneider	UUT-28
9070TF500D1	XFMR/500 VA/460Vac PRI/120Vac SEC w/FUS	500VA	12.6		UUT-29

**Table 18 - Certified Subcomponents: Optional Subcomponents
(Within Wall Mounted Units)**

Description	Type Code	Description	Weight [lb]	UUT
External 24 V DC/AC & Digital I/O Extension (2xRO abd 1xDO)	L501	CMOD-01	< 0.3	Extrapolated
External 24 V & Isolated PTC Interface	L523	CMOD-02	< 0.3	Extrapolated
ATEX Certified PTC Interface & External 24V	L537	CPTC-02	< 0.3	Extrapolated
Bipolar Analog IO Extension	L500	CBAI-01	< 0.2	Extrapolated
115/230V Digital input (6xDI & 2xRO)	L512	CHDI-01	< 0.3	UUT-10
Analog I/O Extension	L500	FIO-11	< 0.3	UUT-13
Digital I/O Extension	L501	FIO-01	< 0.3	Extrapolated
HTL encoder Interface	L502	FEN-31	< 0.3	UUT-13
Resolver Interface	L516	FEN-21	< 0.3	Extrapolated
TTL Encoder Interface	L517	FEN-01	< 0.3	Extrapolated
Absolute Encoder Interface	L518	FEN-11	< 0.3	Extrapolated
Digital I/O Extension 2	L526	FDIO-01	< 0.3	UUT-15
Analog I/O Extension 2	L525	FAIO-01	< 0.3	UUT-14
Thermistor Protection Module	L536	FPTC-01	< 0.3	Extrapolated
Pulse Encoder Interface	L521	FSE-31	< 0.3	UUT-15
DDCS Communication 10/10 MBd	L503	FDCO-01	< 0.3	UUT-14
DDCS Communication 5/10 MBd	L508	FDCO-02	< 0.3	Extrapolated
PROFIBUS-DP	K454	FPBA-01	< 0.3	UUT-05
CANopen	K457	FCAN-01	< 0.3	Extrapolated
DeviceNet	K451	FDNA-01	< 0.3	UUT-15
Modbus/RTU	K458	FSCA-01	< 0.3	Extrapolated
ControlNet	K462	FCNA-01	< 0.3	UUT-09
Ethernet (EtherNet/IP, Modbus/TCP, Profinet)	K473	FENA-11	< 0.3	Extrapolated
EtherCAT	K469	FECA-01	< 0.3	Extrapolated
Ethernet Powerlink	K470	FEPL-02	< 0.3	Extrapolated
2-port Ethernet (EtherNet/IP, Modbus/TCP, Profinet)	K475	FENA-21	< 0.3	UUT-11
Two-Port EtherNet / IP Adapter FEIP-21	K490	FEIP-21	< 0.3	Extrapolated
BACnet / IP (2-port)	K465	FBIP-21	< 0.3	Extrapolated
EtherNet Adapter	K466	FENA-01	< 0.3	Extrapolated
Two-Port Modbus / TCP Adapter FMBT-21	K491	FMBT-21	< 0.3	Extrapolated
Two-Port Profinet / I/O Adapter FPNO-21	K492	FPNO-21	< 0.3	Extrapolated
Safety Functions Fieldbus Module FSPS-21	Q986	FSPS-21	< 0.3	UUT-14
LonWorks	K452	FLON-01	< 0.3	UUT-10
Functional Safety Module	Q973	FSO-12	< 0.3	Extrapolated
Functional Safety Module - Requires FSE Safe Direction	Q972	FSO-21	< 0.3	UUT-13
ACH580 H&-Off-Auto Control Panel	J400	ACH-AP-H	< 0.2	UUT-01, UUT-02, UUT-03, UUT-05, UUT-06, UUT-07, UUT-08, UUT-09, UUT-10, UUT-11, UUT-12
Control Panel with Bluetooth Interface	J429	ACH-AP-W	< 0.2	Interpolated
Assistant Control Panel (Standard)	J400	AS-AP-S	< 0.2	Interpolated
Assistant Control Panel	J425	ACS-AP-I	< 0.2	Interpolated
Basic Control Panel	J404	ACS-BP-S	< 0.2	Interpolated
Assistant Control Panel with Bluetooth Interface	J429	ACS-AP-W	< 0.2	UUT-04, UUT-13, UUT-14, UUT-15
Blank Control Panel Cover (No Control Panel)	J424	CDUM-01	< 0.2	Extrapolated
Panel Bus Adapter		CDPI-01	< 0.2	UUT - 09, UUT - 10
UL Type 12 / IP 55	B056	NA	NA	UUT-02, UUT-04, UUT-08, UUT-11, UUT-15
UL Type 3R	B058	NA	NA	UUT-10
EMC / Common Mode Filters	Exxx	NA	NA	UUT-04, UUT-13, UUT-14, UUT-15
Resistor Braking	Dxxx	NA	NA	UUT-13, UUT-15
Cabinet Mounting Option	P94x	NA	NA	UUT-09, UUT-10, UUT-11
Flange Mount Option	C135	NA	NA	UUT-12, UUT-13

Note: 1. ABB is the manufacturer for all units.
 2. 3A units were tested rigid and isolated
 3. Type Codes are appended to Model Numbers from Certified Product Table



UNIT UNDER TEST (UUT) Summary Sheet

UUT-1A

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-01-044A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure

Options / Subcomponent Summary

Variable Frequency Drive: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
26	9.0	8.0	19.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-1A was mounted directly to the wall fixture using (4) 10-32 bolts (gradeless).



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-1B

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-01-044A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure

Options / Subcomponent Summary

Variable Frequency Drive: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
26	9.0	8.0	19.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information									
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}	
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-	
		2.50	0.0	1.5	-	-	1.68	0.68	

Test Mounting Details

UUT-1B was mounted to the wall fixture using (4) 10-32 bolts (gradeless). The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-2A

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-01-414A-4	ABB

Product Construction Summary

Plastic Type 12 Enclosure with Drip Hood

Options / Subcomponent Summary

Variable Frequency Drive: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
216	15.0	19.0	38.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-2A was mounted directly to the wall fixture using (4) 5/16" diameter Grade 8 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-2B

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-01-414A-4	ABB

Product Construction Summary

Plastic Type 12 Enclosure with Drip Hood

Options / Subcomponent Summary

Variable Frequency Drive: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
216	15.0	19.0	38.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-2B was mounted to the wall fixture using (4) 5/16" diameter Grade 8 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-3A

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-31-023A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure

Options / Subcomponent Summary

Variable Frequency Drive: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
44	8.0	14.0	20.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-3A was mounted directly to the wall fixture using (4) 10-32 bolts (gradeless).



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-3B

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-31-023A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure

Options / Subcomponent Summary

Variable Frequency Drive: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
44	8.0	14.0	20.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-3B was mounted to the wall fixture using (4) 10-32 bolts (gradeless). The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-4A

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx880	ACS580-11-180A-5	ABB

Product Construction Summary

Plastic Type 12 Enclosure with Drip Hood

Options / Subcomponent Summary

Variable Frequency Drive: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
268	20.0	12.0	38.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-4A was mounted directly to the wall fixture using (4) 5/16" diameter Grade 8 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-4B

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx880	ACS880-11-180A-5	ABB

Product Construction Summary

Plastic Type 12 Enclosure with Drip Hood

Options / Subcomponent Summary

Variable Frequency Drive: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
268	20.0	12.0	38.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-4B was mounted to the wall fixture using (4) 5/16" diameter Grade 8 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-5A

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-VCR-012A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure with Carbon Steel R1 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Disconnects: ABB; Contactors: ABB; Circuit Breakers: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
30	9.0	5.0	40.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-5A was mounted directly to the wall fixture using (4) 1/4" diameter Grade 8 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-5B

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-VCR-012A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure with Carbon Steel R1 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Disconnects: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
30	9.0	5.0	40.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-5B was mounted to the wall fixture using (4) 1/4" diameter Grade 8 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-6A

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-VCR-065A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure with Carbon Steel R4 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Terminal Blocks: Bussmann Cooper; Disconnects: ABB; Contactors: ABB; Circuit Breakers: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
86	10.0	8.0	56.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-6A was mounted directly to the wall fixture using (4) 5/16" diameter Grade 8 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-6B

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-VCR-065A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure with Carbon Steel R4 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Terminal Blocks: Bussmann Cooper; Disconnects: ABB; Contactors: ABB; Circuit Breakers: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
86	10.0	8.0	56.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-6B was mounted to the wall fixture using (4) 5/16" diameter Grade 8 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-7A

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-PCR-044A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure with Carbon Steel R3 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Circuit Breakers: ABB; Accessories: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
39	12.0	8.0	34.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-7A was mounted directly to the wall fixture using (6) 1/4" diameter Grade 8 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-7B

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-PCR-044A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure with Carbon Steel R3 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Circuit Breakers: ABB; Accessories: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
39	12.0	8.0	34.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information									
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}	
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-	
		2.50	0.0	1.5	-	-	1.68	0.68	

Test Mounting Details

UUT-7B was mounted to the wall fixture using (6) 1/4" diameter Grade 8 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-7C

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-PCR-044A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure with Plastic R3 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Circuit Breakers: ABB; Accessories: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
39	12.0	8.0	34.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-7C was mounted directly to the wall fixture using (4) 1/4" diameter Grade 8 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-7D

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-PCR-044A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure with Plastic R3 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Circuit Breakers: ABB; Accessories: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
39	12.0	8.0	34.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-7D was mounted to the wall fixture using (4) 1/4" diameter Grade 8 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-8A

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-PCR-065A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure with Carbon Steel R4 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Fans: Delta Products / NMB Technologies; Circuit Breakers: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
59	13.0	8.0	39.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-8A was mounted directly to the wall fixture using (6) 1/4" diameter Grade 8 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-8B

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-PCR-065A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure with Carbon Steel R4 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Fans: Delta Products / NMB Technologies; Circuit Breakers: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
59	13.0	8.0	39.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information									
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}	
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-	
		2.50	0.0	1.5	-	-	1.68	0.68	

Test Mounting Details

UUT-8B was mounted to the wall fixture using (6) 1/4" diameter Grade 8 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-8C

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-PCR-065A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure with Carbon Steel R4 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Fans: Delta Products / NMB Technologies; Circuit Breakers: ABB

UUT Properties

Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
59	13.0	8.0	39.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-8C was mounted directly to the wall fixture using (4) 1/4" diameter Grade 8 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-8D

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-PCR-065A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure with Carbon Steel R4 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Fans: Delta Products / NMB Technologies; Circuit Breakers: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
59	13.0	8.0	39.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information									
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}	
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-	
		2.50	0.0	1.5	-	-	1.68	0.68	

Test Mounting Details

UUT-8D was mounted to the wall fixture using (4) 1/4" diameter Grade 8 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-9A

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-BCR-023A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure with Carbon Steel R2 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Terminal Blocks: Bussmann Cooper; Fans: Delta Products / NMB Technologies; Disconnects: ABB; Contactors: ABB; Circuit Breakers: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
84	12.0	17.0	33.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-9A was mounted directly to the wall fixture using (4) 5/16" diameter Grade 8 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-9B

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-BCR-023A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure with Carbon Steel R2 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Terminal Blocks: Bussmann Cooper; Fans: Delta Products / NMB Technologies; Disconnects: ABB; Contactors: ABB; Circuit Breakers: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
84	12.0	17.0	33.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-9B was mounted to the wall fixture using (4) 5/16" diameter Grade 8 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-10A

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-BCR-065A-4	ABB

Product Construction Summary

Plastic Type 3R Enclosure with Carbon Steel R4 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Terminal Blocks: Bussmann Cooper; Fans: Delta Products / NMB Technologies; Disconnects: ABB; Contactors: ABB; Circuit Breakers: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
190	15.0	21.0	41.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information									
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}	
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-	
		2.50	0.0	1.5	-	-	1.68	0.68	

Test Mounting Details

UUT-10A was mounted directly to the wall fixture using (4) 5/16" diameter Grade 8 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-10B

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-BCR-065A-4	ABB

Product Construction Summary

Plastic Type 3R Enclosure with Carbon Steel R4 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Terminal Blocks: Bussmann Cooper; Fans: Delta Products / NMB Technologies; Disconnects: ABB; Contactors: ABB; Circuit Breakers: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
190	15.0	21.0	41.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information									
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}	
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-	
		2.50	0.0	1.5	-	-	1.68	0.68	

Test Mounting Details

UUT-10B was mounted to the wall fixture using (4) 5/16" diameter Grade 8 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-11A

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-BCR-240A-4	ABB

Product Construction Summary

Plastic Type 12 Enclosure with Carbon Steel R8 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Fans: Delta Products / NMB Technologies; Circuit Breakers: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
358	18.0	28.0	47.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-11A was mounted directly to the wall fixture using (4) 3/8" diameter Grade 8 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-11B

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-BCR-240A-4	ABB

Product Construction Summary

Plastic Type 12 Enclosure with Carbon Steel R8 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Fans: Delta Products / NMB Technologies; Circuit Breakers: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
358	18.0	28.0	47.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-11B was mounted to the wall fixture using (4) 3/8" diameter Grade 8 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-12A

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-01-096A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure

Options / Subcomponent Summary

Variable Frequency Drive: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
59	12.0	8.0	25.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-12A was mounted directly to the wall fixture using (16) 1/4" diameter self-tapping screws.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-12B

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx580	ACH580-01-096A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure

Options / Subcomponent Summary

Variable Frequency Drive: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
59	12.0	8.0	25.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-12B was mounted to the wall fixture using (16) 1/4" diameter self-tapping screws. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4 Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-13A

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx880	ACS880-01-414A-5	ABB

Product Construction Summary

Plastic Type 12 Enclosure

Options / Subcomponent Summary

Variable Frequency Drive: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
205	16.0	14.0	27.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-13A was mounted directly to the wall fixture using (18) 1/4" diameter self-tapping screws.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-13B

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx880	ACS880-01-414A-5	ABB

Product Construction Summary

Plastic Type 12 Enclosure

Options / Subcomponent Summary

Variable Frequency Drive: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
205	16.0	14.0	27.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information									
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}	
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-	
		2.50	0.0	1.5	-	-	1.68	0.68	

Test Mounting Details

UUT-13B was mounted to the wall fixture using (18) 1/4" diameter self-tapping screws. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4 Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-14A

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx880	ACS880-01-034A-5	ABB

Product Construction Summary

Plastic Type 1 Enclosure

Options / Subcomponent Summary

Variable Frequency Drive: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
24	10.0	7.0	13.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-14A was mounted directly to the wall fixture using (4) 10-32 bolts (gradeless).



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-14B

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx880	ACS880-01-034A-5	ABB

Product Construction Summary

Plastic Type 1 Enclosure

Options / Subcomponent Summary

Variable Frequency Drive: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
24	10.0	7.0	13.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-14B was mounted to the wall fixture using (4) 10-32 bolts (gradeless). The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-15A

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx880	ACS880-01-414A-5	ABB

Product Construction Summary

Plastic Type 12 Enclosure with Drip Hood

Options / Subcomponent Summary

Variable Frequency Drive: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
225	19.0	15.0	37.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-15A was mounted directly to the wall fixture using (4) 5/16" diameter Grade 8 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-15B

Test Report: 30686-1801 Rev01

Model Line	Model Number	Manufacturer
ACx880	ACS880-01-414A-5	ABB

Product Construction Summary

Plastic Type 12 Enclosure with Drip Hood

Options / Subcomponent Summary

Variable Frequency Drive: ABB

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
225	19.0	15.0	37.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-15B was mounted to the wall fixture using (4) 5/16" diameter Grade 8 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-16A

Test Report: 13085-2001

Model Line	Model Number	Manufacturer
ACx580	ACH580-BCR-096A-4+E213 (BX1-4)	ABB

Product Construction Summary

Carbon Steel Type 1 Wall Mounted Enclosure

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Enclosure: ABB; Fuses: Bussmann Cooper; Terminal Blocks: ENTRELEC; Fans: PFANNENBERG; Contactors: ABB; Breakers: ABB; Current Transformers: ABB, Reactors: TCI;

UUT Properties

Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
243	19.0	19.5	62.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-16A was mounted directly to the wall fixture using (4) 3/8" diameter Grade 8 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-16B

Test Report: 13085-2001

Model Line	Model Number	Manufacturer
ACx580	ACH580-BCR-096A-4+E213 (BX1-4)	ABB

Product Construction Summary

Carbon Steel Type 1 Wall Mounted Enclosure

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Enclosure: ABB; Fuses: Bussmann Cooper; Terminal Blocks: ENTRELEC; Fans: PFANNENBERG; Contactors: ABB; Breakers: ABB; Current Transformers: ABB, Reactors: TCI;

UUT Properties


Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
243	19.0	19.5	62.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-16B was mounted to the wall fixture using (4) 3/8" diameter Grade 8 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.

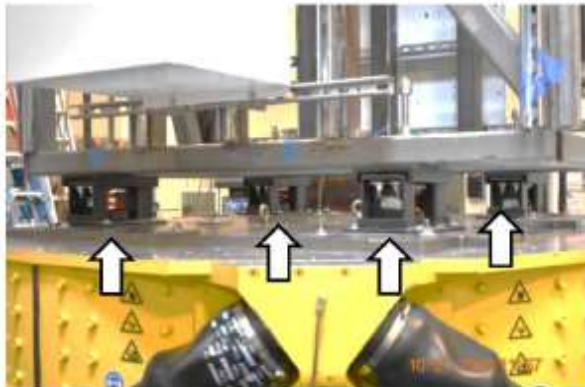

All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-17

Test Report: 13085-2001

Model Line	Model Number	Manufacturer
ACx580	ACH580-BCR-240A-4+E213 (BX1-6)	ABB

Product Construction Summary

Carbon Steel Type 1 Base Mounted Enclosure

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Enclosure: ABB; Fuses: Bussmann Cooper; Terminal Blocks: ENTRELEC; Fans: PFANNENBERG; Contactors: ABB; Breakers: ABB; Fuse Blocks: Bussmann Cooper; Filters: PFANNENBERG; Current Transformers: ABB, Reactors: TCI;

UUT Properties


Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
720	25.0	32.0	78.0	11.5	8.0	28.5

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-17 was rigidly mounted to the shake table using (10) 3/8" diameter Grade 8 bolts, (10) 1.5"x1.5"x3/16" washers, and (10) round washers in the manufacturer-provided mounting locations. DCRs: Prior to shake testing, the unit mounting feet were found to be of insufficient design and are required to have thicker sheet metal and additional mounting holes.

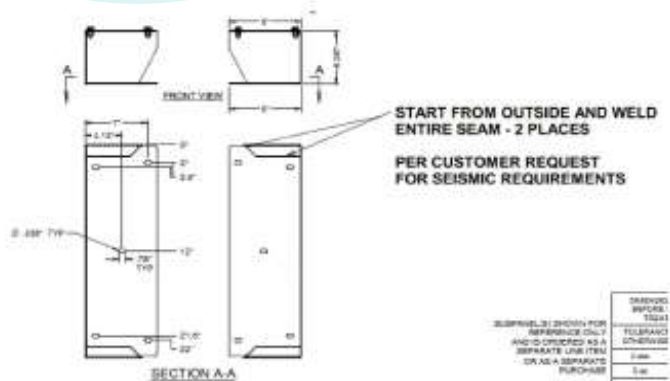

All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-18A

Test Report: 13085-2001

Model Line	Model Number	Manufacturer
ACx580	ACH580-PCR-273A-2+E213 (BX1-5)	ABB

Product Construction Summary

Carbon Steel Type 1 Wall Mounted Enclosure

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Enclosure: ABB; Fuses: Bussmann Cooper; Terminal Blocks: ENTRELEC; Fans: PFANNENBERG; Breakers: ABB; Fuse Blocks: Bussmann Cooper; Filters: PFANNENBERG; Current Transformers: ABB, Reactors: TCI;

UUT Properties

Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
443	20.5	35.0	62.5	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-18A was mounted directly to the wall fixture using (4) 1/2" diameter Grade 8 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-18B

Test Report: 13085-2001

Model Line	Model Number	Manufacturer
ACx580	ACH580-PCR-273A-2+E213 (BX1-5)	ABB

Product Construction Summary

Carbon Steel Type 1 Wall Mounted Enclosure

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Enclosure: ABB; Fuses: Bussmann Cooper; Terminal Blocks: ENTRELEC; Fans: PFANNENBERG; Breakers: ABB; Fuse Blocks: Bussmann Cooper; Filters: PFANNENBERG; Current Transformers: ABB, Reactors: TCI;

UUT Properties


Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
443	20.5	35.0	62.5	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-18B was mounted to the wall fixture using (4) 1/2" diameter Grade 8 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.

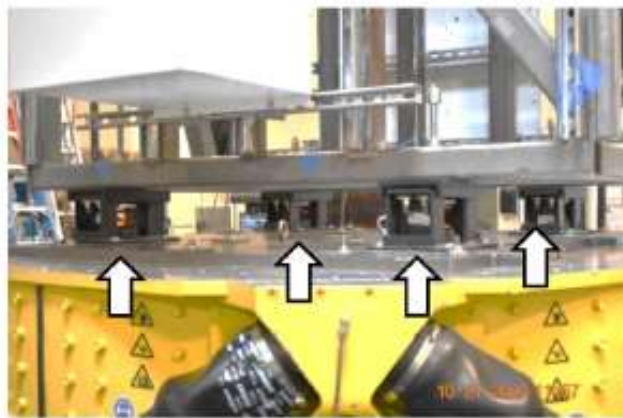

All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-19

Test Report: 13085-2001

Model Line	Model Number	Manufacturer
ACx580	ACH580-PCR-414A-4+B058+E213 (PXB3R-5)	ABB

Product Construction Summary

Carbon Steel Type 3R Base Mounted Enclosure

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Enclosure: ABB; Fuses: Bussmann Cooper; Terminal Blocks: ENTRELEC; Fans: PFANNENBERG; Contactors: ABB; Breakers: ABB; Fuse Blocks: Bussmann Cooper; Filters: PFANNENBERG; Current Transformers: ABB, Reactors: TCI;

UUT Properties


Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
720	32.0	44.3	78.0	9.0	20.0	>33.3

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-19 was rigidly mounted to the shake table using (10) 3/8" diameter Grade 8 bolts, (10) 1.5"x1.5"x3/16" washers, and (10) round washers in the manufacturer-provided mounting locations. DCRs: Prior to shake testing, the unit mounting feet were found to be of insufficient design and are required to have thicker sheet metal and additional mounting holes.

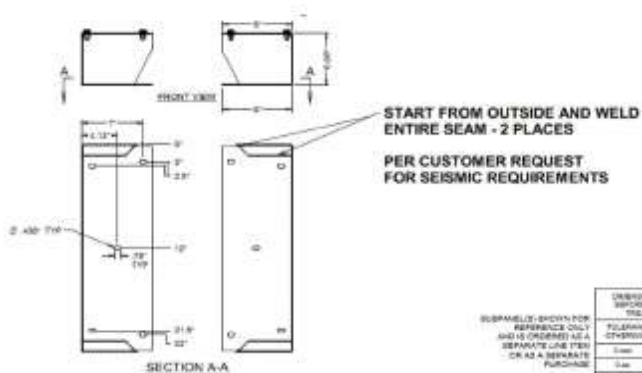

All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-20

Test Report: 13085-2001

Model Line	Model Number	Manufacturer
ACx580	ACH580-BCR-414A-4+B058+E213+F267 (BX3R-6)	ABB

Product Construction Summary

Carbon Steel Type 3R Base Mounted Enclosure

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Enclosure: ABB; Fuses: Bussmann Cooper; Terminal Blocks: ENTRELEC; Fans: PFANNENBERG; Contactors: ABB; Breakers: ABB; Fuse Blocks: Bussmann Cooper; Filters: PFANNENBERG; Current Transformers: ABB, Reactors: TCI;

UUT Properties


Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
1,170	28.5	55.0	84.0	10.0	7.0	>33.3

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-20 was rigidly mounted to the shake table using (4) 7/16" diameter Grade 8 bolts, round washers, and (4) 1.75"x1.75"x1/4" Carbon Steel plate washers in the manufacturer-provided mounting locations. DCRs: Prior to testing, the subcomponent mounting panel was found to be insufficient. Channels must be added to increase panel support.

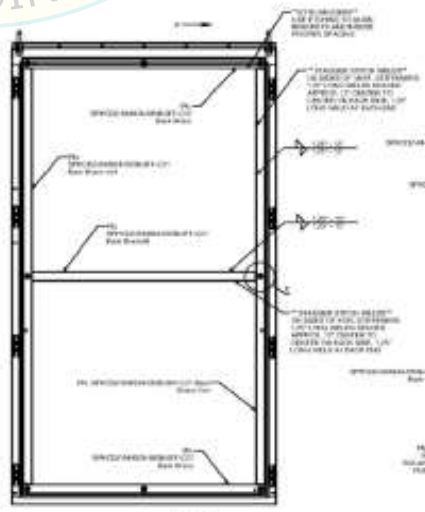

All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-21A

Test Report: 31063-1901

Model Line	Model Number	Manufacturer
ACx580	ACH580-VCR-077A-6	ABB

Product Construction Summary

Plastic Type 1 Enclosure with Carbon Steel R5 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Terminal Blocks: Bussmann Cooper; Fuse Blocks: Bussmann Cooper; Disconnects: ABB; Contactors: ABB; Circuit Breakers: ABB Current Transformer: ABB;

UUT Properties

Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
116	12.0	8.0	56.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-21A was mounted directly to the wall fixture using (4) 1/4" diameter Grade 8 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-21B

Test Report: 31063-1901

Model Line	Model Number	Manufacturer
ACx580	ACH580-VCR-077A-6	ABB

Product Construction Summary

Plastic Type 1 Enclosure with Carbon Steel R5 Base

Options / Subcomponent Summary

Variable Frequency Drive: ABB; Fuses: Bussmann Cooper; Terminal Blocks: Bussmann Cooper; Fuse Blocks: Bussmann Cooper; Disconnects: ABB; Contactors: ABB; Circuit Breakers: ABB Current Transformer: ABB;

UUT Properties

Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
116	12.0	8.0	56.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-21B was mounted to the wall fixture using (4) 1/4" diameter Grade 8 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-22A

Test Report: 18720-2201

Model Line	Model Number	Manufacturer
ACx580	ACH580-3BCR-07A6-4	ABB

Product Construction Summary

Carbon Steel Type 1 Wall Mounted Enclosure

Options / Subcomponent Summary

VFD: ABB; Fuses: Cooper Bussman; Fan: Mechatronics; Contactors: ABB; Circuit Breaker: ABB; Fuse Block: Cooper Bussman; Disconnect Switches: ABB; Current Transformer: ABB;

UUT Properties

Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
138	18.0	17.0	49.5	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-22A was mounted directly to the wall fixture using (4) 3/8" diameter Grade 5 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-22B

Test Report: 18720-2201

Model Line	Model Number	Manufacturer
ACx580	ACH580-3BCR-07A6-4	ABB

Product Construction Summary

Carbon Steel Type 1 Wall Mounted Enclosure

Options / Subcomponent Summary

VFD: ABB; Fuses: Cooper Bussman; Fan: Mechatronics; Contactors: ABB; Circuit Breaker: ABB; Fuse Block: Cooper Bussman; Disconnect Switches: ABB; Current Transformer: ABB;

UUT Properties

Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
138	18.0	17.0	49.5	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-22B was mounted to the wall fixture using (4) 3/8" diameter Grade 5 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-23A

Test Report: 18720-2201

Model Line	Model Number	Manufacturer
ACx580	ACH580-3BCR- 077A-4	ABB

Product Construction Summary

Carbon Steel Type 1 Wall Mounted Enclosure

Options / Subcomponent Summary

VFD: ABB; Fuses: Cooper Bussman; Fan: Mechatronics; Contactors: ABB; Circuit Breaker: ABB; Fuse Block: Cooper Bussman; Disconnect Switches: ABB; Current Transformer: ABB;

UUT Properties

Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
273	19.3	19.5	62.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-23A was mounted directly to the wall fixture using (4) 3/8" diameter Grade 5 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-23B

Test Report: 18720-2201

Model Line	Model Number	Manufacturer
ACx580	ACH580-3BCR- 077A-4	ABB

Product Construction Summary

Carbon Steel Type 1 Wall Mounted Enclosure

Options / Subcomponent Summary

VFD: ABB; Fuses: Cooper Bussman; Fan: Mechatronics; Contactors: ABB; Circuit Breaker: ABB; Fuse Block: Cooper Bussman; Disconnect Switches: ABB; Current Transformer: ABB;

UUT Properties


Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
273	19.3	19.5	62.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-23B was mounted to the wall fixture using (4) 3/8" diameter Grade 5 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.

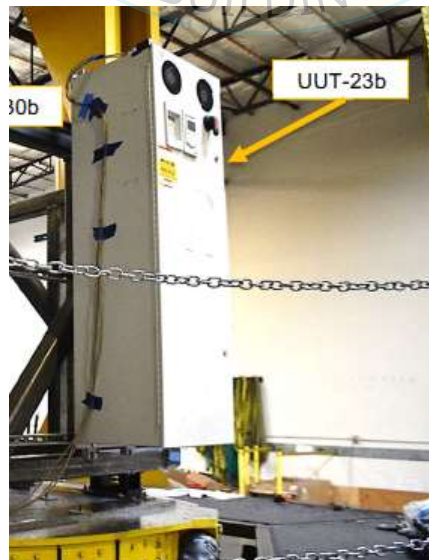

All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-24A

Test Report: 18720-2201

Model Line	Model Number	Manufacturer
ACx580	ACH580-3PCR- 180A-4	ABB

Product Construction Summary

Carbon Steel Type 1 Wall Mounted Enclosure

Options / Subcomponent Summary

VFD: ABB; Fuses: Cooper Bussman; Fan: Mechatronics; Circuit Breaker: ABB; Fuse Block: Cooper Bussman; Current Transformer: ABB;

UUT Properties

Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
409	21.1	19.4	61.8	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-24A was mounted directly to the wall fixture using (4) 3/8" diameter Grade 5 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-24B

Test Report: 18720-2201

Model Line	Model Number	Manufacturer
ACx580	ACH580-3PCR- 180A-4	ABB

Product Construction Summary

Carbon Steel Type 1 Wall Mounted Enclosure

Options / Subcomponent Summary

VFD: ABB; Fuses: Cooper Bussman; Fan: Mechatronics; Circuit Breaker: ABB; Fuse Block: Cooper Bussman; Current Transformer: ABB;

UUT Properties

Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
409	21.1	19.4	61.8	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-24B was mounted to the wall fixture using (4) 3/8" diameter Grade 5 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-25A

Test Report: 18720-2201

Model Line	Model Number	Manufacturer
ACx580	ACH580-3PCR- 07A6-4	ABB

Product Construction Summary

Carbon Steel Type 1 Wall Mounted Enclosure

Options / Subcomponent Summary

VFD: ABB; Fuses: Cooper Bussman; Fuse Block: Cooper Bussman;

UUT Properties

Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
68	18.0	9.0	37.8	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-25A was mounted directly to the wall fixture using (4) 3/8" diameter Grade 5 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-25B

Test Report: 18720-2201

Model Line	Model Number	Manufacturer
ACx580	ACH580-3PCR- 07A6-4	ABB

Product Construction Summary

Carbon Steel Type 1 Wall Mounted Enclosure

Options / Subcomponent Summary

VFD: ABB; Fuses: Cooper Bussman; Fuse Block: Cooper Bussman;

UUT Properties

Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
68	18.0	9.0	37.8	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-25B was mounted to the wall fixture using (4) 3/8" diameter Grade 5 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-26A

Test Report: 18720-2201

Model Line	Model Number	Manufacturer
ACx580	ACH580-3PCR- 077A-4	ABB

Product Construction Summary

Carbon Steel Type 1 Wall Mounted Enclosure

Options / Subcomponent Summary

VFD: ABB; Fuses: Cooper Bussman; Circuit Breaker: ABB;

UUT Properties

Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
180	19.0	10.8	51.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-26A was mounted directly to the wall fixture using (4) 3/8" diameter Grade 5 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-26B

Test Report: 18720-2201

Model Line	Model Number	Manufacturer
ACx580	ACH580-3PCR- 077A-4	ABB

Product Construction Summary

Carbon Steel Type 1 Wall Mounted Enclosure

Options / Subcomponent Summary

VFD: ABB; Fuses: Cooper Bussman; Circuit Breaker: ABB;

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
180	19.0	10.8	51.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information									
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}	
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-	
		2.50	0.0	1.5	-	-	1.68	0.68	

Test Mounting Details

UUT-26B was mounted to the wall fixture using (4) 3/8" diameter Grade 5 bolts. The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators. The isolators were connected to the wall fixture using (1) 3/4" Grade 5 bolt each, and were connected to the shake table using (4) 1/2" diameter Grade 5 bolts per isolator.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-27

Test Report: 18720-2201

Model Line	Model Number	Manufacturer
ACx580	ACH580-3BCR- 180A-4	ABB

Product Construction Summary

Carbon Steel Type 1 Base Mounted Enclosure

Options / Subcomponent Summary

VFD: ABB; Fuses: Cooper Bussman; Fan: Mechatronics; Contactors: ABB; Circuit Breaker: ABB; Fuse Block: Cooper Bussman; Disconnect Switches: ABB; Current Transformer: ABB;

UUT Properties

Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
550	20.5	34.8	73.5	0.0	0.0	0.0

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-27 was rigidly mounted to the shake table using (6) 3/8" diameter Grade 5 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-28

Test Report: 18720-2201

Model Line	Model Number	Manufacturer
ACx580	ACH580-3BCR- 477A-4	ABB

Product Construction Summary

Carbon Steel Type 1 Base Mounted Enclosure

Options / Subcomponent Summary

VFD: ABB; Fuses: Cooper Bussman; Fan: Rittal; Contactors: ABB; Circuit Breaker: ABB; Fuse Block: Cooper Bussman; Disconnect Switches: ABB; Current Transformer: Schneider;

UUT Properties

Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
1,440	25.8	55.0	91.0	0.0	0.0	0.0

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-28 was rigidly mounted to the shake table using (5) 3/8" diameter Grade 5 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-29

Test Report: 18720-2201

Model Line	Model Number	Manufacturer
ACx580	ACH580-3PCR- 477A-4	ABB

Product Construction Summary

Carbon Steel Type 1 Base Mounted Enclosure

Options / Subcomponent Summary

VFD: ABB; Fuses: Cooper Bussman; Fan: Rittal; Circuit Breaker: ABB; Fuse Block: Cooper Bussman; Current Transformer: Schneider;

UUT Properties

Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
1,290	25.8	47.0	91.0	0.0	0.0	0.0

UUT Highest Passed Seismic Run Information

Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-29 was rigidly mounted to the shake table using (5) 3/8" diameter Grade 5 bolts.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-30A

Test Report: 18720-2201

Model Line	Model Number	Manufacturer
ACx180	ACS180-04S-04A8-2	ABB

Product Construction Summary

Plastic Type 1 Enclosure Wall Mounted Enclosure

Options / Subcomponent Summary

N/A

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
2	5.5	2.8	7.0	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-30A was mounted directly to the wall fixture using (2) #10 bolts (gradeless).



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-30B

Test Report: 18720-2201

Model Line	Model Number	Manufacturer
ACx180	ACS180-04S-03A7-2	ABB

Product Construction Summary

Plastic Type 1 Enclosure Wall Mounted Enclosure

Options / Subcomponent Summary

N/A

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
2	5.8	2.8	7.5	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-30B was mounted to the wall fixture using (2) #10 bolts (gradeless). The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-31A

Test Report: 18720-2201

Model Line	Model Number	Manufacturer
ACx180	ACH180-045-050A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure Wall Mounted Enclosure

Options / Subcomponent Summary

N/A

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
12	7.0	10.3	9.3	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-31A was mounted directly to the wall fixture using (4) #10 bolts (gradeless).



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.



UNIT UNDER TEST (UUT) Summary Sheet

UUT-31B

Test Report: 18720-2201

Model Line	Model Number	Manufacturer
ACx180	ACH180-045-050A-4	ABB

Product Construction Summary

Plastic Type 1 Enclosure Wall Mounted Enclosure

Options / Subcomponent Summary

N/A

UUT Properties						
Weight [lbs]	Dimensions [in]			Lowest Nat. Freq. [Hz]		
	Length	Width	Height	F-B	S-S	V
12	7.0	10.3	9.3	N/A	N/A	N/A

UUT Highest Passed Seismic Run Information								
Building Code	Test Criteria	S _{DS}	z/h	I _p	A _{FLX-H}	A _{RIG-H}	A _{FLX-V}	A _{RIG-V}
CBC 2023	ICC-ES AC156	2.00	1.0	1.5	3.20	2.40	-	-
		2.50	0.0	1.5	-	-	1.68	0.68

Test Mounting Details

UUT-31B was mounted to the wall fixture using (4) #10 bolts (gradeless). The wall fixture was isolated using (4) VMC Group MSSH-1E-530N spring isolators.



All units were filled with contents and maintained structural integrity and functionality after AC-156 test.