






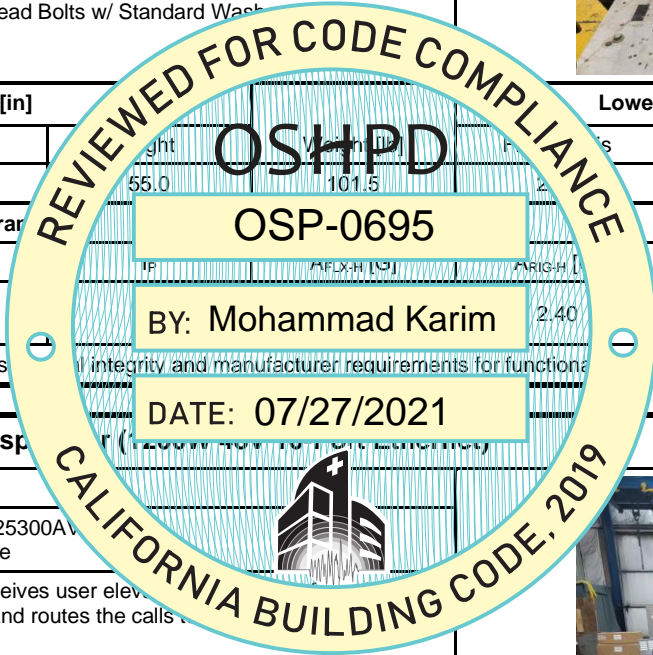





**ATTACHMENT 2: TEST SPECIMEN SUMMARY**

ATTACHMENT PAGE | 1 OF 1

|  |       |   |                        |                                       |                        |                        |  |
|--|-------|---|------------------------|---------------------------------------|------------------------|------------------------|--|
| <b>UUT-2006-1 Compass Dispatcher (600W 48V 8-Port Ethernet)</b>  |       |   |                        |                                       |                        |                        |  |
| <i>Manufacturer:</i> OTIS  |       |  |                        |                                       |                        |                        |  |
| <i>Identification:</i> Part No.: AAA25300AV5<br>Serial No.: None   |       |   |                        |                                       |                        |                        |  |
| <i>Description:</i> Component receives user elevator call requests from the user interface and routes the calls to the appropriate elevator car controller.<br><br>Includes mounting bracket which is seismic kit with P/N: AAA471PY1<br><br>Weight includes mounting bracket. |       |   |                        |                                       |                        |                        |  |
| <i>Mounting:</i> Rigid Base (Floor) mounted using (4) – 3/8" dia. SAE J429 Grade 5 Hex Head Bolts w/ Standard Washers.   |       |   |                        |                                       |                        |                        |  |
| <b>Dimensions [in]</b>   |       |   |                        | <b>Lowest Resonant Frequency [Hz]</b> |                        |                        |  |
| Width  | Depth | Height  | Weight [lb]            | Side - Axis                           | Vert - Axis            |                        |  |
| 15.3   | 7.9   | 55.0  | 112.5                  | 18.8                                  | 42.8                   |                        |  |
| <b>ICC-ES AC156 Shake Table Test Parameters</b>  |       |   |                        | <b>Code: 2019 CBC</b>                 |                        |                        |  |
| S <sub>DS</sub> [G]  | z/h   | I <sub>p</sub>  | A <sub>FLX-H</sub> [G] | A <sub>RI-GH</sub> [G]                | A <sub>FLX-V</sub> [G] | A <sub>RI-GV</sub> [G] |  |
| 2.0  | 1     |   | 3.20                   | 2.40                                  | 1.68                   | 0.68                   |  |
| 2.5  | 0     |   |                        |                                       |                        |                        |  |
| Unit satisfied AC156 requirements for structural integrity and manufacturer requirements for functionality after AC156 test.   |       |   |                        |                                       |                        |                        |  |



|  |       |   |                        |                                       |                        |                        |  |
|--|-------|---|------------------------|---------------------------------------|------------------------|------------------------|--|
| <b>UUT-2006-2 Compass Dispatcher (600W 48V 8-Port Ethernet)</b>  |       |   |                        |                                       |                        |                        |  |
| <i>Manufacturer:</i> OTIS  |       |  |                        |                                       |                        |                        |  |
| <i>Identification:</i> Part No.: AAA25300AV5<br>Serial No.: None   |       |   |                        |                                       |                        |                        |  |
| <i>Description:</i> Component receives user elevator call requests from the user interface and routes the calls to the appropriate elevator car controller.<br><br>Includes mounting bracket which is seismic kit with P/N: AAA471PY1<br><br>Weight includes mounting bracket. |       |   |                        |                                       |                        |                        |  |
| <i>Mounting:</i> Rigid Base (Floor) mounted using (4) – 3/8" dia. SAE J429 Grade 5 Hex Head Bolts w/ Standard Washers.   |       |   |                        |                                       |                        |                        |  |
| <b>Dimensions [in]</b>   |       |   |                        | <b>Lowest Resonant Frequency [Hz]</b> |                        |                        |  |
| Width  | Depth | Height  | Weight [lb]            | Front - Axis                          | Side - Axis            | Vert - Axis            |  |
| 15.3   | 7.9   | 55.0  | 112.5                  | 21.3                                  | 17.9                   | >50                    |  |
| <b>ICC-ES AC156 Shake Table Test Parameters</b>  |       |   |                        | <b>Code: 2019 CBC</b>                 |                        |                        |  |
| S <sub>DS</sub> [G]  | z/h   | I <sub>p</sub>  | A <sub>FLX-H</sub> [G] | A <sub>RI-GH</sub> [G]                | A <sub>FLX-V</sub> [G] | A <sub>RI-GV</sub> [G] |  |
| 2.0  | 1     | 1.5   | 3.20                   | 2.40                                  | 1.68                   | 0.68                   |  |
| 2.5  | 0     |   |                        |                                       |                        |                        |  |
| Unit satisfied AC156 requirements for structural integrity and manufacturer requirements for functionality after AC156 test.   |       |   |                        |                                       |                        |                        |  |